



STEVI® BBD 415

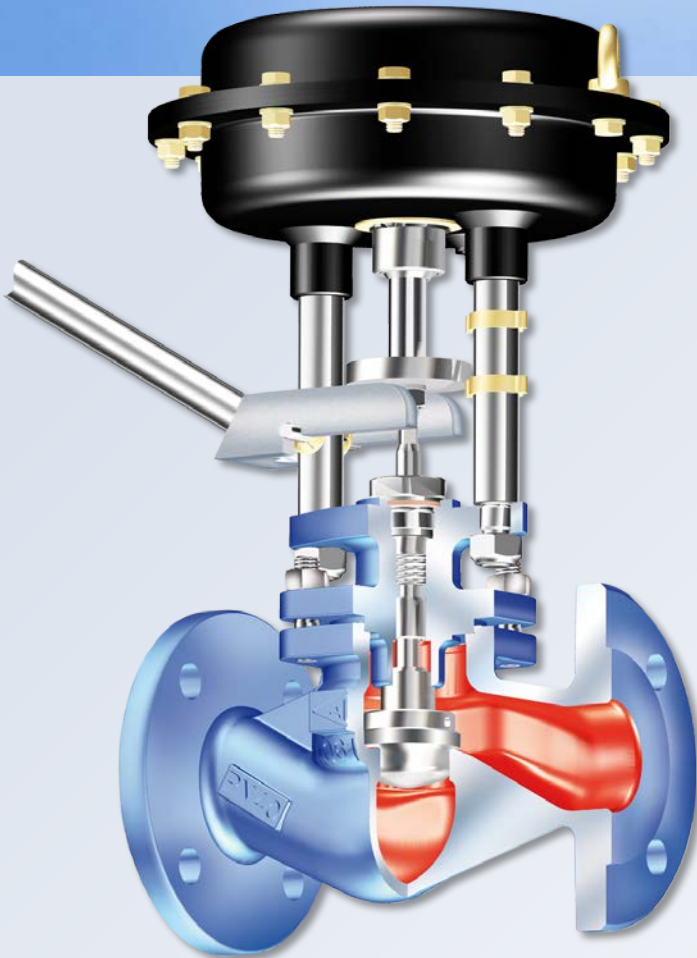

Blow down valve

- ▶ Straight through
- ▶ DN25 – DN50
- ▶ PN40
- ▶ Temperature -10 °C up to 450 °C
- ▶ Compact design
- ▶ Precision guided stem
- ▶ Burnished stem
- ▶ Spring loaded PTFE-V-ring unit
- ▶ Body material
 - 1.0619+N
- ▶ Travel indicator
- ▶ Spring protected in body
- ▶ Pneumatic actuator with rolling diaphragm

STEVI® BBD 415



- 415 blow down valve with flanges and pneumatic actuator