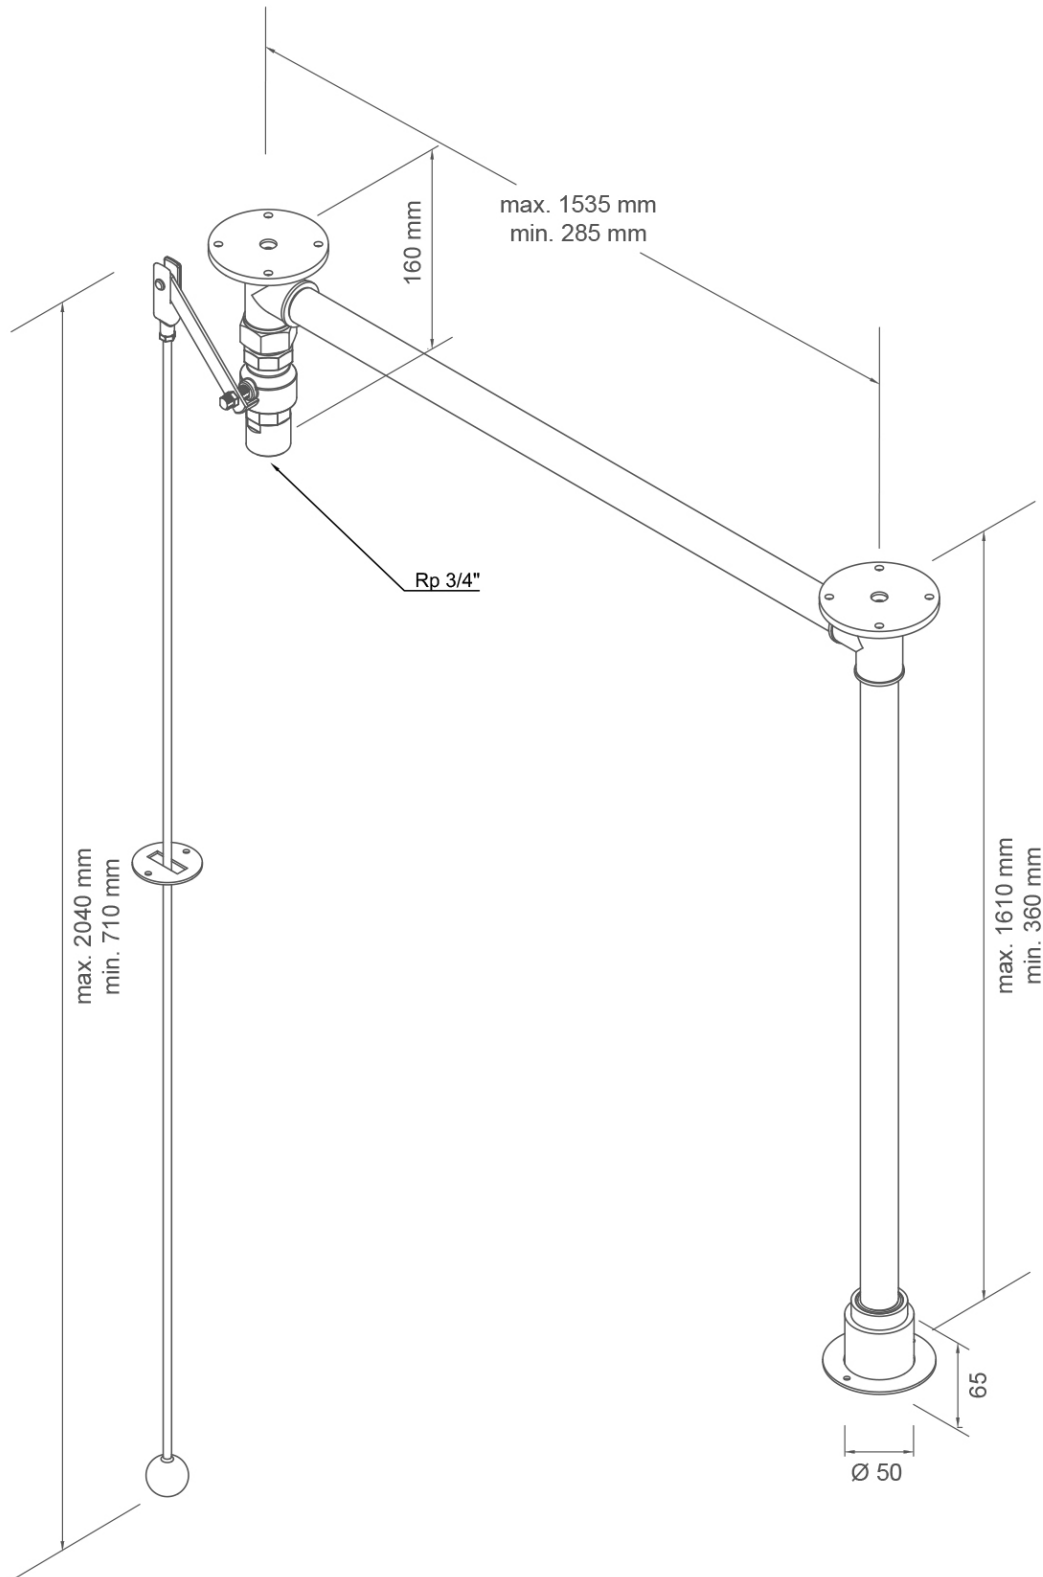


**BR 089 095 / V**

**PremiumLine variable body safety shower, for installation in suspended ceilings**



### Technical description

PremiumLine variable body safety shower, for installation in suspended ceilings

- connection adapter of stainless steel, polished, with integrated automatic flow regulation 50 l/min. for a spray pattern acc. to the norms at a specified operating range of 1.5 to 3 bar dynamic water pressure, water inlet 3/4" female
- ball valve 3/4" of stainless steel, with pull rod actuation, DIN-DVGW tested and certificated
- pull rod with ball handle of stainless steel, length variable (min. 710 mm - max. 2040 mm)
- slotted stainless steel rosette for passage through the suspended ceiling
- double nipple 3/4" of stainless steel
- ceiling flange with 4 mounting holes of stainless steel, polished
- connection pipe 3/4" of stainless steel, polished, length variable according to specification (total width min. 285 mm - max. 1535 mm)
- ceiling flange with 4 mounting holes of stainless steel, polished
- connection pipe 3/4" of stainless steel, polished, headroom variable according to specification (min. 360 mm - max. 1610 mm)
- high-performance shower head of stainless steel, polished, with improved spray pattern, corrosion resistant, largely scale and maintenance-free, very robust, self-draining
- round rosette of stainless steel for installation of the shower head in the suspended ceiling
- sign for body safety shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 150 x 150 mm, viewing distance 15 metre
- mounting height according to the standards listed below: lower edge of high-performance shower head 2200 mm (± 100 mm) height above floor level
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014, EN 15154-2:2006 and EN 15154-5:2019
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal  
Article-No.: BR 089 095 / V

### Technical specifications

Material:	stainless steel
Surface:	polished
Headroom:	360-1610 mm
Installation height:	variable
Total width:	285-1535 mm
Operating pressure:	1.5 to 3 bar
Flow rate:	50 l/min
Water inlet:	3/4" female

### Norm conformity

- EN 15154-2:2006
- EN 15154-5:2019
- ANSI Z358.1-2014

### Approvals




- DIN-DVGW, DVGW, NW-0417CL0263
- GOST-R, Zertifikats-Nr. 0615463







Material-overview	Material	Material description
Connection adapter:	stainless steel	AISI 304
High-performance shower head:	stainless steel	AISI 316
Ball valve:	stainless steel	AISI 316
Flow regulator:	plastic POM	-
Piping:	stainless steel	AISI 316
Pul rod with ring handle:	stainless steel	AISI 316
Double nipple:	stainless steel	AISI 316
Ceiling flange:	stainless steel	AISI 304
Rosette:	stainless steel	AISI 316
Sign for body safety shower:	PVC-foil	-

Product overview	
<b>BR 089 095 / V</b>	PremiumLine variable body safety shower, for installation in suspended ceilings - flow rate 50 l/min (hazard class I according to EN 15154-5:2019)
<b>BR 089 095 / V75L</b>	PremiumLine variable body safety shower, for installation in suspended ceilings - flow rate 75 l/min / 20 GPM (hazard class II according to EN 15154-5:2019)
<b>BR 089 095 / V110L</b>	PremiumLine variable body safety shower, for installation in suspended ceilings - flow rate 110 l/min (hazard class III according to EN 15154-5:2019)

## Accessories for body safety showers

Product overview	Model	Material	Water inlet	Water outlet	Article-No.
	ClassicLine cable actuation for injured persons lying on the ground, additional to pull rod.	Stainless steel rope	-	-	<b>BR 082 200</b>
	ClassicLine disability friendly pull rod with double ring handle, green. Length: 1150 mm	Steel	-	-	<b>BR 082 300</b>
	PremiumLine disability friendly pull rod with double ring handle, stainless steel. Length: 1150 mm	Stainless steel	-	-	<b>BR 082 350</b>
	Service shut-off for eye showers and safety showers with removable release lever.	Stainless steel	3/4" female	3/4" female	<b>BR 830 955</b>

[www.b-safety.com](http://www.b-safety.com)

	Thermostatic mixing valve for eye showers and safety showers, setting range 20 - 43°C, scald protection 43°C, volume flow approx. 60 l/min at 2 bar flow pressure.	Brass	3/4" male and 1" male	3/4" male and 1" male	<b>BR 710 950</b>
	Flow switch for eye showers, protection degree IP 65, electrical supply with 1.5 m cable.	Brass	3/4" female	3/4" female	<b>BR 710 800</b>
	Switch for body safety shower, complete premounted on shower, for EX-Zones 1 & 2.	Plastic	-	-	<b>BR 830 400</b>
	ClassicLine alarm system for eye showers & safety showers with siren-/flashlight combination. Prewired junction box inclusive electronic switch.  Electrical supply: 230 V - 50 Hz	Plastic	-	-	<b>BR 015 800</b>



**B-SAFETY**<sup>®</sup>  
PROFESSIONAL SAFETY SOLUTIONS

B-SAFETY GmbH - Oststraße 85 - DE-22844 Norderstedt  
Fon: +49-(0)40/53 80 92-70 - Fax: +49-(0)40/53 80 92-86  
Web: [www.b-safety.com](http://www.b-safety.com) - E-Mail: [info@b-safety.com](mailto:info@b-safety.com)