


BR 027 995

**PremiumLine safety shower valve with draining, wall mounted  
recessed version**

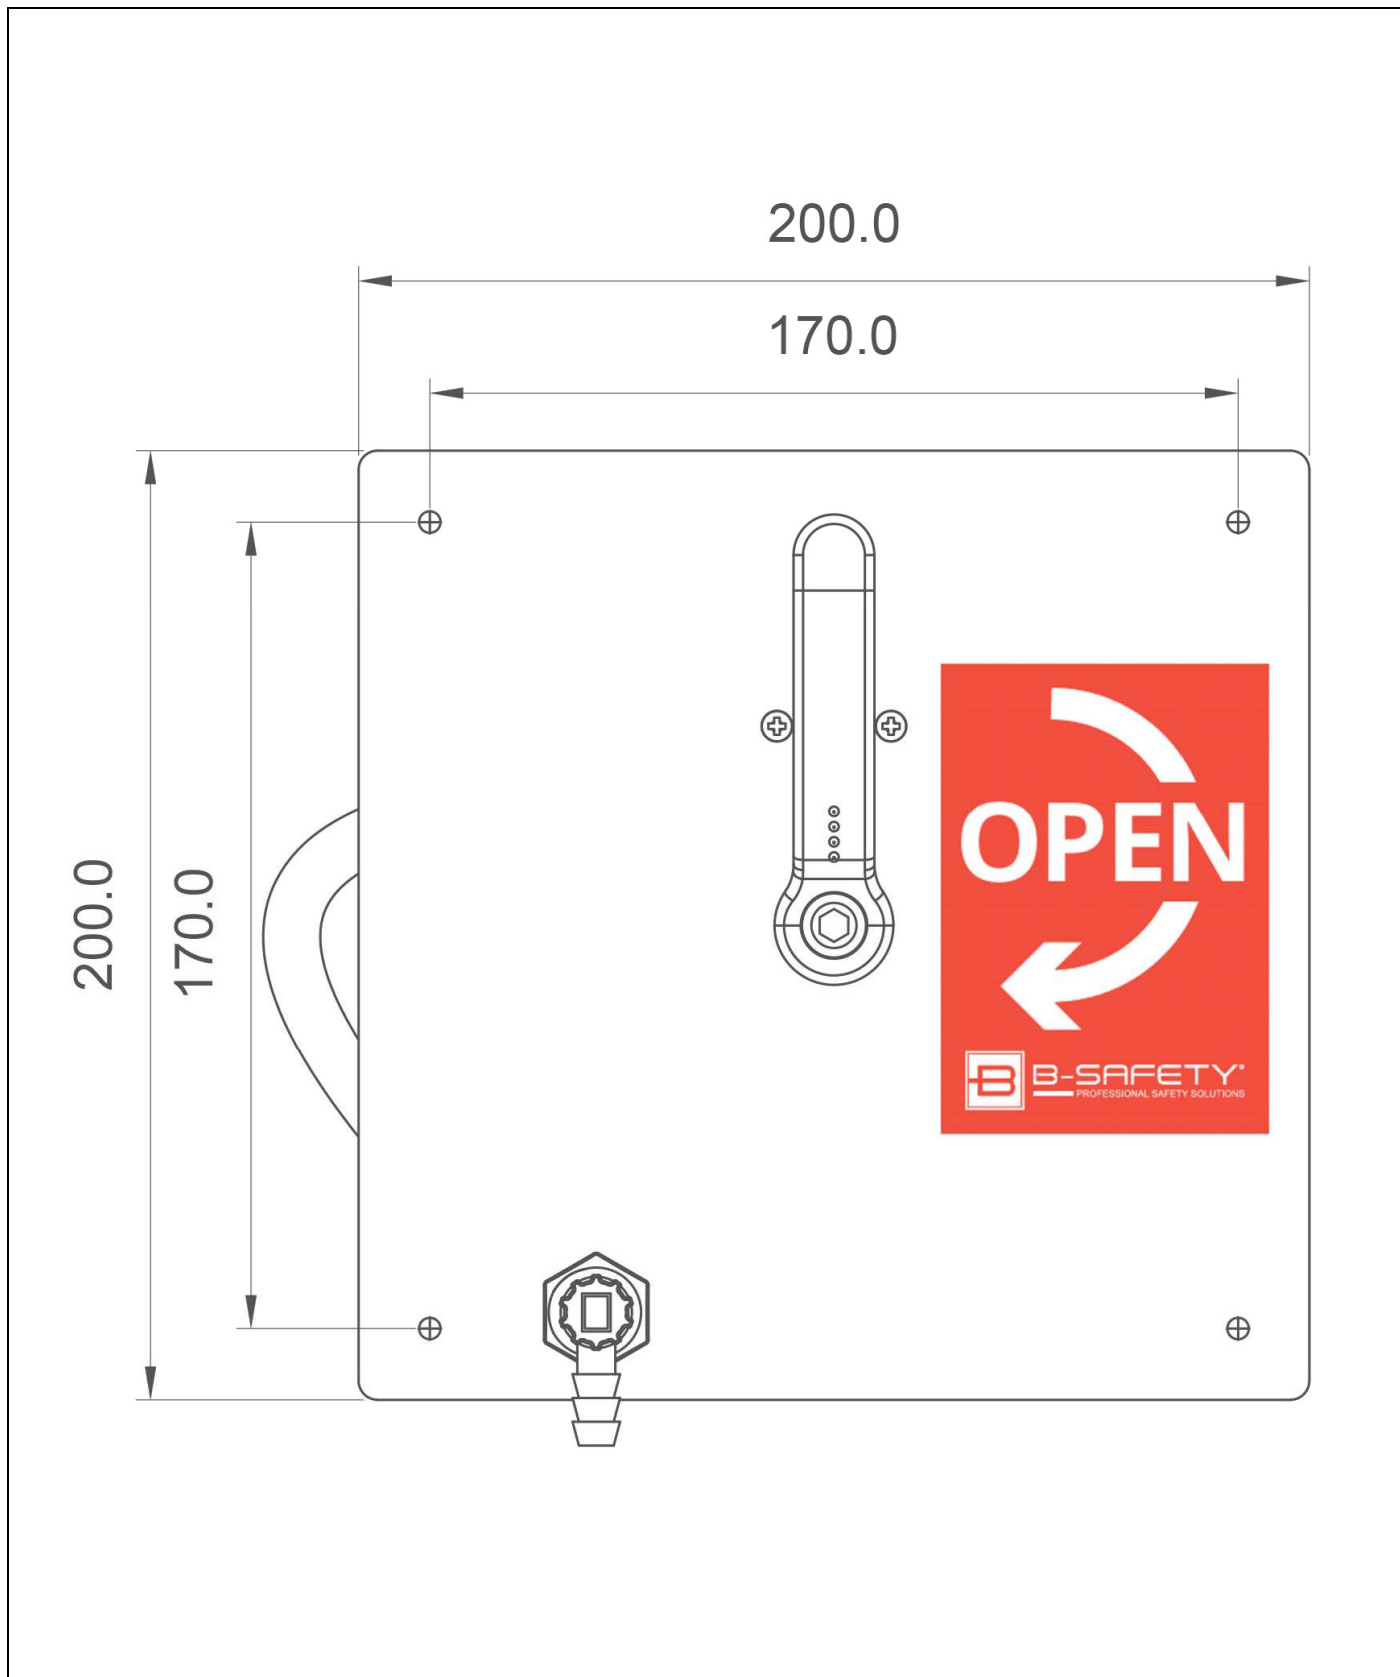

### Technical description

PremiumLine safety shower valve with draining, wall mounted recessed version

- cover plate made of stainless steel, with 4x fixing holes (diameter 4.50 mm) in the corners.
- ball valve made of stainless steel, DIN-DVGW tested and approved
- including 2x stainless steel union pipe fittings for simplified on-site installation, water inlet ¾" female
- flow rate min. 60 litres / minute at 1 bar flow pressure
- adjustable plastic clamp-lever-handle, lockable with tools, orange, total length 110 mm
- actuation via swivelling lever, opening angle 90°, not self-closing
- integrated draining valve for automatic or manual emptying
- information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510
- mounting height for levers according to the standards mentioned below: 0 to 1750 mm height above floor level
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014, EN 15154-1:2006 and EN 15154-5:2019

Manufacturer: B-SAFETY or equal  
Article-No.: BR 027 995

### Technical specifications

Material:	stainless steel, plastic
Dimensions (H x W):	200 x 200 mm
Operating pressure:	1 to 5 bar
Flow rate:	at least 60 l/min at 1 bar flow pressure
Water inlet:	¾" female

### Norm conformity

- EN 15154-1:2006
- EN 15154-5:2019
- ANSI Z358.1-2014

### Approvals

- GOST-R, Zertifikats-Nr. 0615463

### Mounting-Instructions

For an installation in accordance with EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

Material overview	Material	Material description
Cover plate:	stainless steel	AISI 304
Ball valve:	stainless steel	AISI 316
Screw connection:	stainless steel	AISI 316
Valve adapter, spindle extension:	stainless steel	AISI 316
Lever handle:	plastic	-
Drain valve:	plastic	-

### Product overview

<b>BR 027 995</b>	PremiumLine safety shower valve with draining, wall mounted recessed version
-------------------	--

