


BR 028 995

PremiumLine safety shower valve in stainless steel cabinet, with automatic draining, wall mounted, recessed version

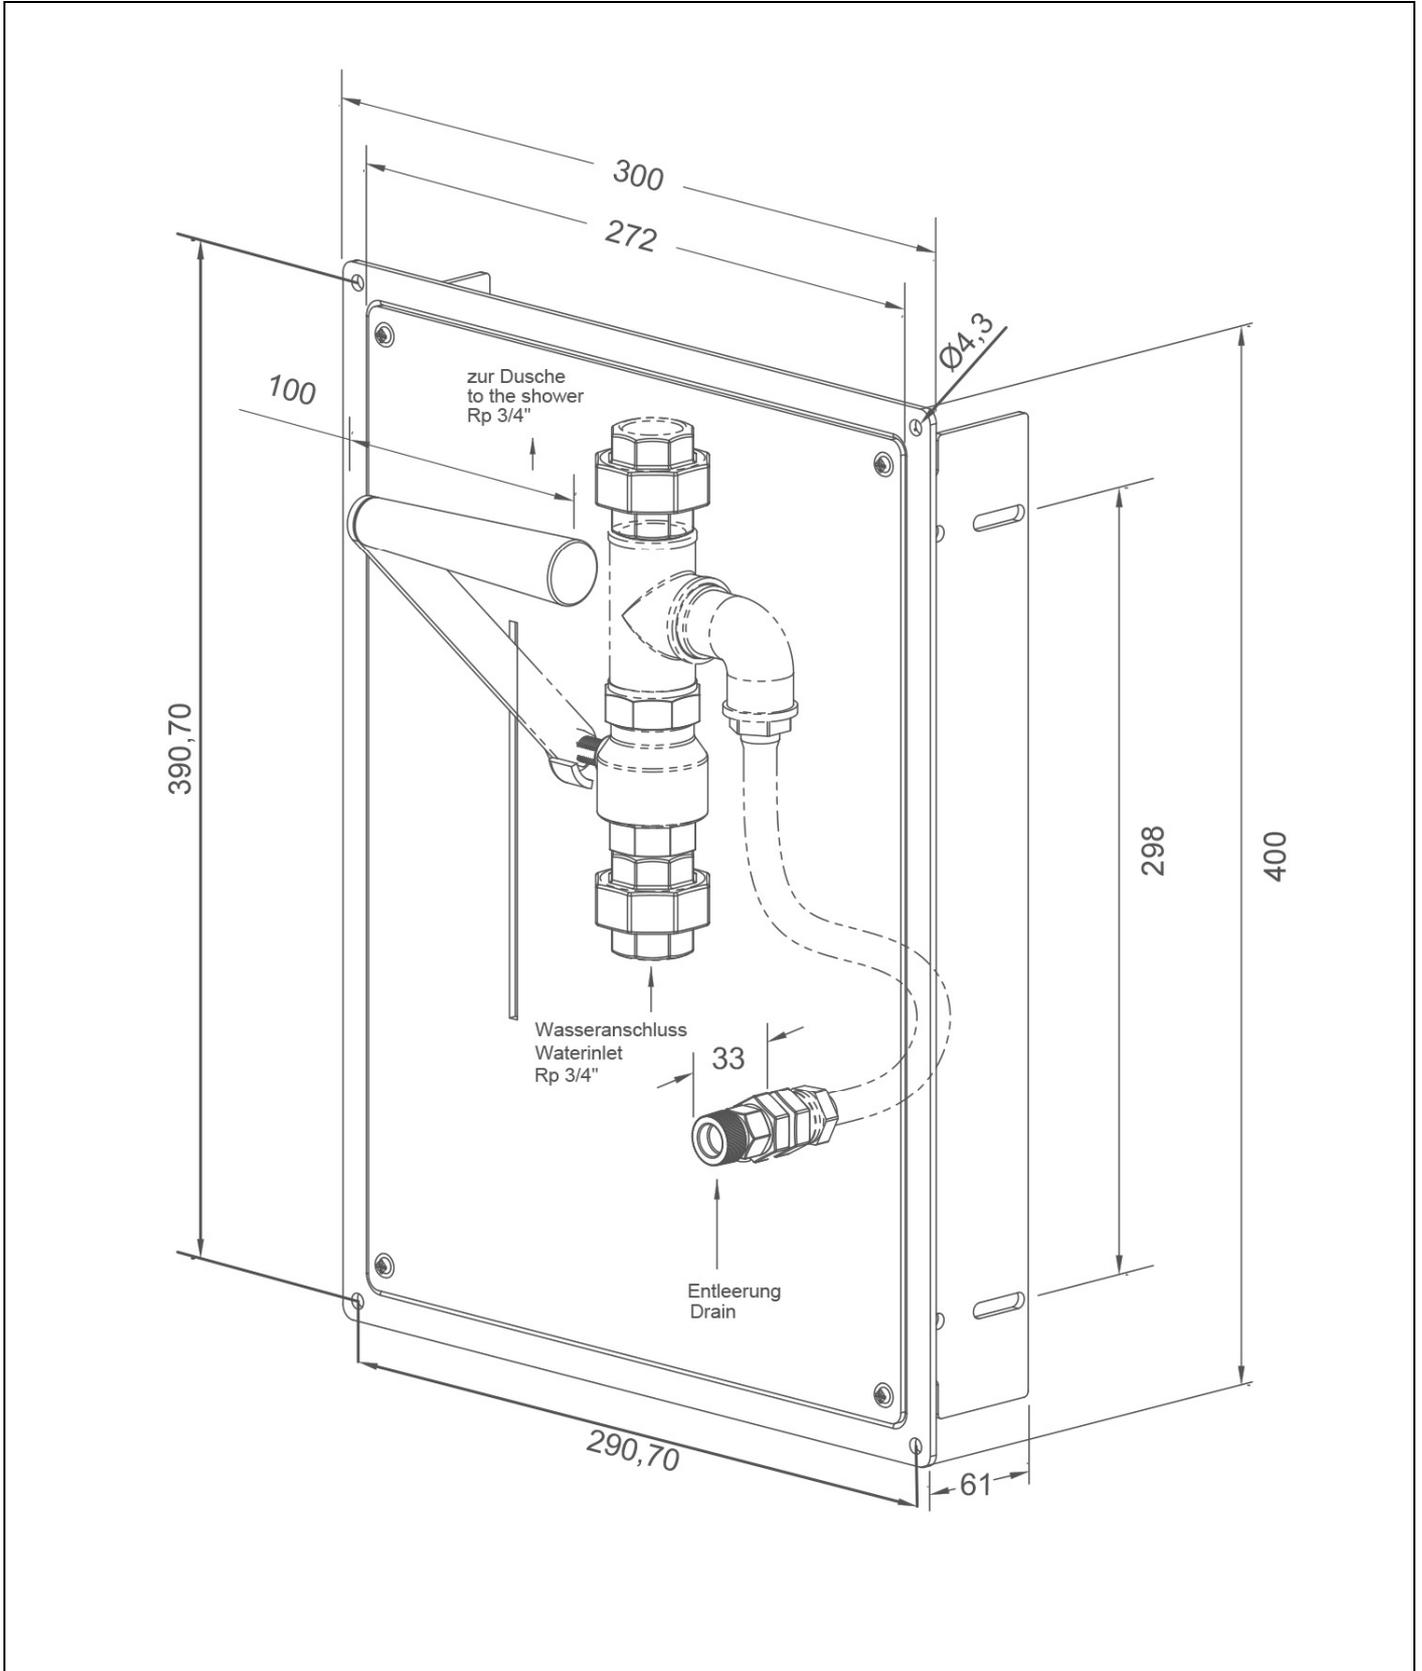

Technical description
PremiumLine safety shower valve in stainless steel cabinet, with automatic draining, wall mounted, recessed version - recessed stainless steel cabinet, cover for maintenance work removable, dimensions (H x W): 400 x 300 mm, installation dimensions (H x W x D): 350 x 251 x 62 mm - ball valve 3/4" of stainless steel, with lever actuation, DIN-DVGW tested and certificated - including 2x stainless steel union pipe fittings for simplified on-site installation, water inlet 3/4" female - flow rate at least 60 l/min at 1 bar flow pressure - actuation via lever made of stainless steel, polished, length 160 mm, opening angle 90°, not self-closing - robust handle of plastics, black, diameter 25 mm, length 90 mm - integrated drain valve with automatic or manual drain, mounted on the outside of the lid - information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510 - mounting height for lever according to the standards listed below: 0 to 1750 mm height above floor - according to BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717 - according to ANSI Z358.1-2014, DIN EN 15154-1:2006 and DIN EN 15154-5:2019 Manufacturer: B-SAFETY or equal Article-No.: BR 028 995

Technical specifications
Material: stainless steel, plastic
Surface: polished
Dimensions (H x W): 400 x 300 mm
Operating pressure: 1 to 5 bar
Flow rate: at least 60 l/min at 1 bar flow pressure
Water inlet: 3/4" female

Norm conformity	Approvals
- DIN EN 15154-1:2006	- GOST-R, Zertifikats-Nr. 0615463
- DIN EN 15154-5:2019	
- ANSI Z358.1-2014	

Mounting-Instructions
For an installation in accordance with DIN EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

Material overview	Material	Material description
Cover plate:	stainless steel	AISI 304
Ball valve:	stainless steel	AISI 316
Screw connection:	stainless steel	AISI 316
T-piece, connection piece, lever:	stainless steel	AISI 316
Handle:	plastic	-
Drain valve, mounting for drain valve:	brass, plastic	-

Product overview		
<table border="1"> <tr> <td>BR 028 995</td> <td>PremiumLine safety shower valve in stainless steel cabinet, with automatic draining, wall mounted, recessed version</td> </tr> </table>	BR 028 995	PremiumLine safety shower valve in stainless steel cabinet, with automatic draining, wall mounted, recessed version
BR 028 995	PremiumLine safety shower valve in stainless steel cabinet, with automatic draining, wall mounted, recessed version	