


BR 026 995

PremiumLine safety shower valve with automatic draining, wall mounted, exposed pipework

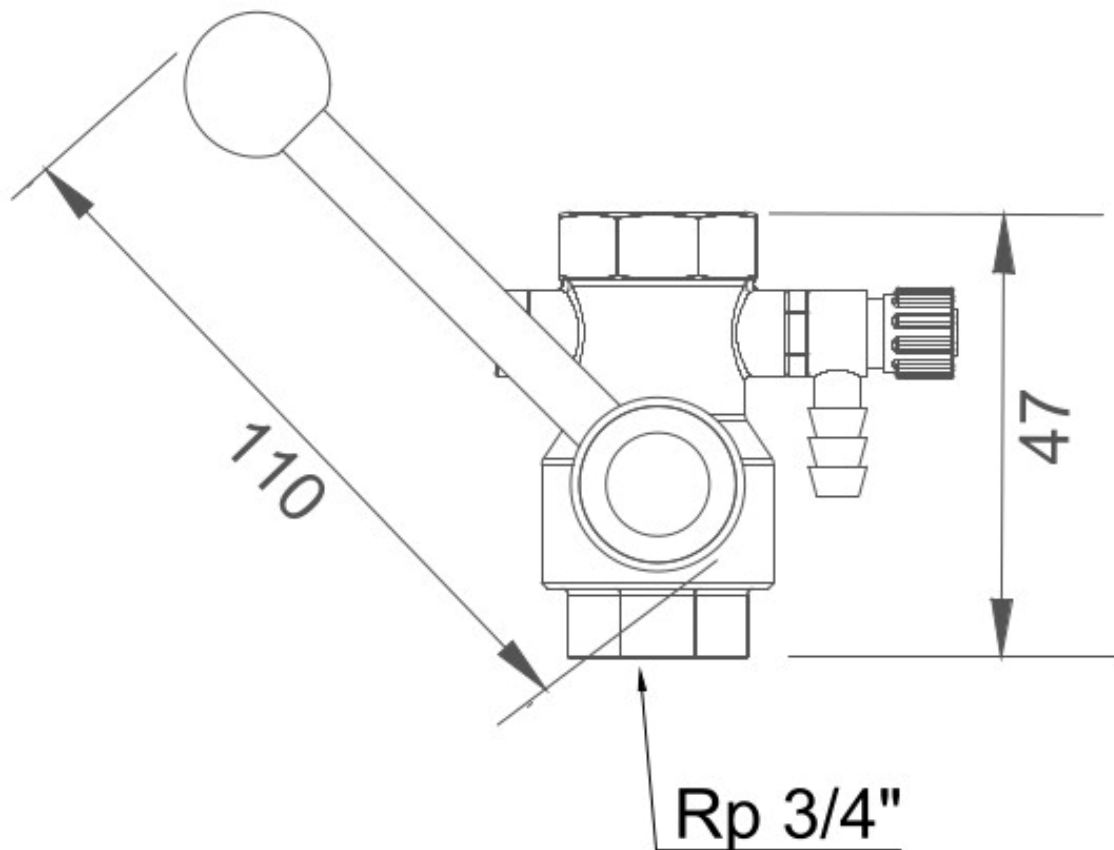

Technical description

PremiumLine safety shower valve with automatic draining, wall mounted, exposed pipework

- ball valve with lever actuation on wall flange of stainless steel, DIN-DVGW tested and certificated, water inlet 3/4" female
- flow rate at least 60 l/min at 1 bar flow pressure
- opening angle 90°, not self-closing
- lever made of stainless steel, polished, length 160 mm
- robust handle of plastics, black, diameter 25 mm, length 90 mm
- information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510
- mounting height for lever according to the standards listed below: 0 to 1750 mm height above floor
- according to BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717
- according to ANSI Z358.1-2014, DIN EN 15154-1:2006 and DIN EN 15154-5:2019

Manufacturer: B-SAFETY or equal
Article-No.: BR 026 995

Technical specifications

Material:	stainless steel, plastic
Dimensions (H x W x D):	150 x 105 x 100 mm
Operating pressure:	1 to 5 bar
Flow rate:	at least 60 l/min at 1 bar flow pressure
Water inlet:	3/4" female

Norm conformity

- DIN EN 15154-1:2006
- DIN EN 15154-5:2019
- ANSI Z358.1-2014

Approvals

- GOST-R, Zertifikats-Nr. 0615463

Mounting-Instructions

For an installation in accordance with DIN EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

Material-overview	Material	Material description
Valve holder:	stainless steel	AISI 316
Ball valve:	stainless steel	AISI 316
Lever:	stainless steel	AISI 316
Handle:	plastic	-
T-piece:	stainless steel	AISI 316
Draining:	plastic	-

Product overview

BR 026 995	PremiumLine safety shower valve with automatic draining, wall mounted, exposed pipework
-------------------	---

