


BR 022 995

PremiumLine rod operated safety shower valve, wall mounted, exposed pipework

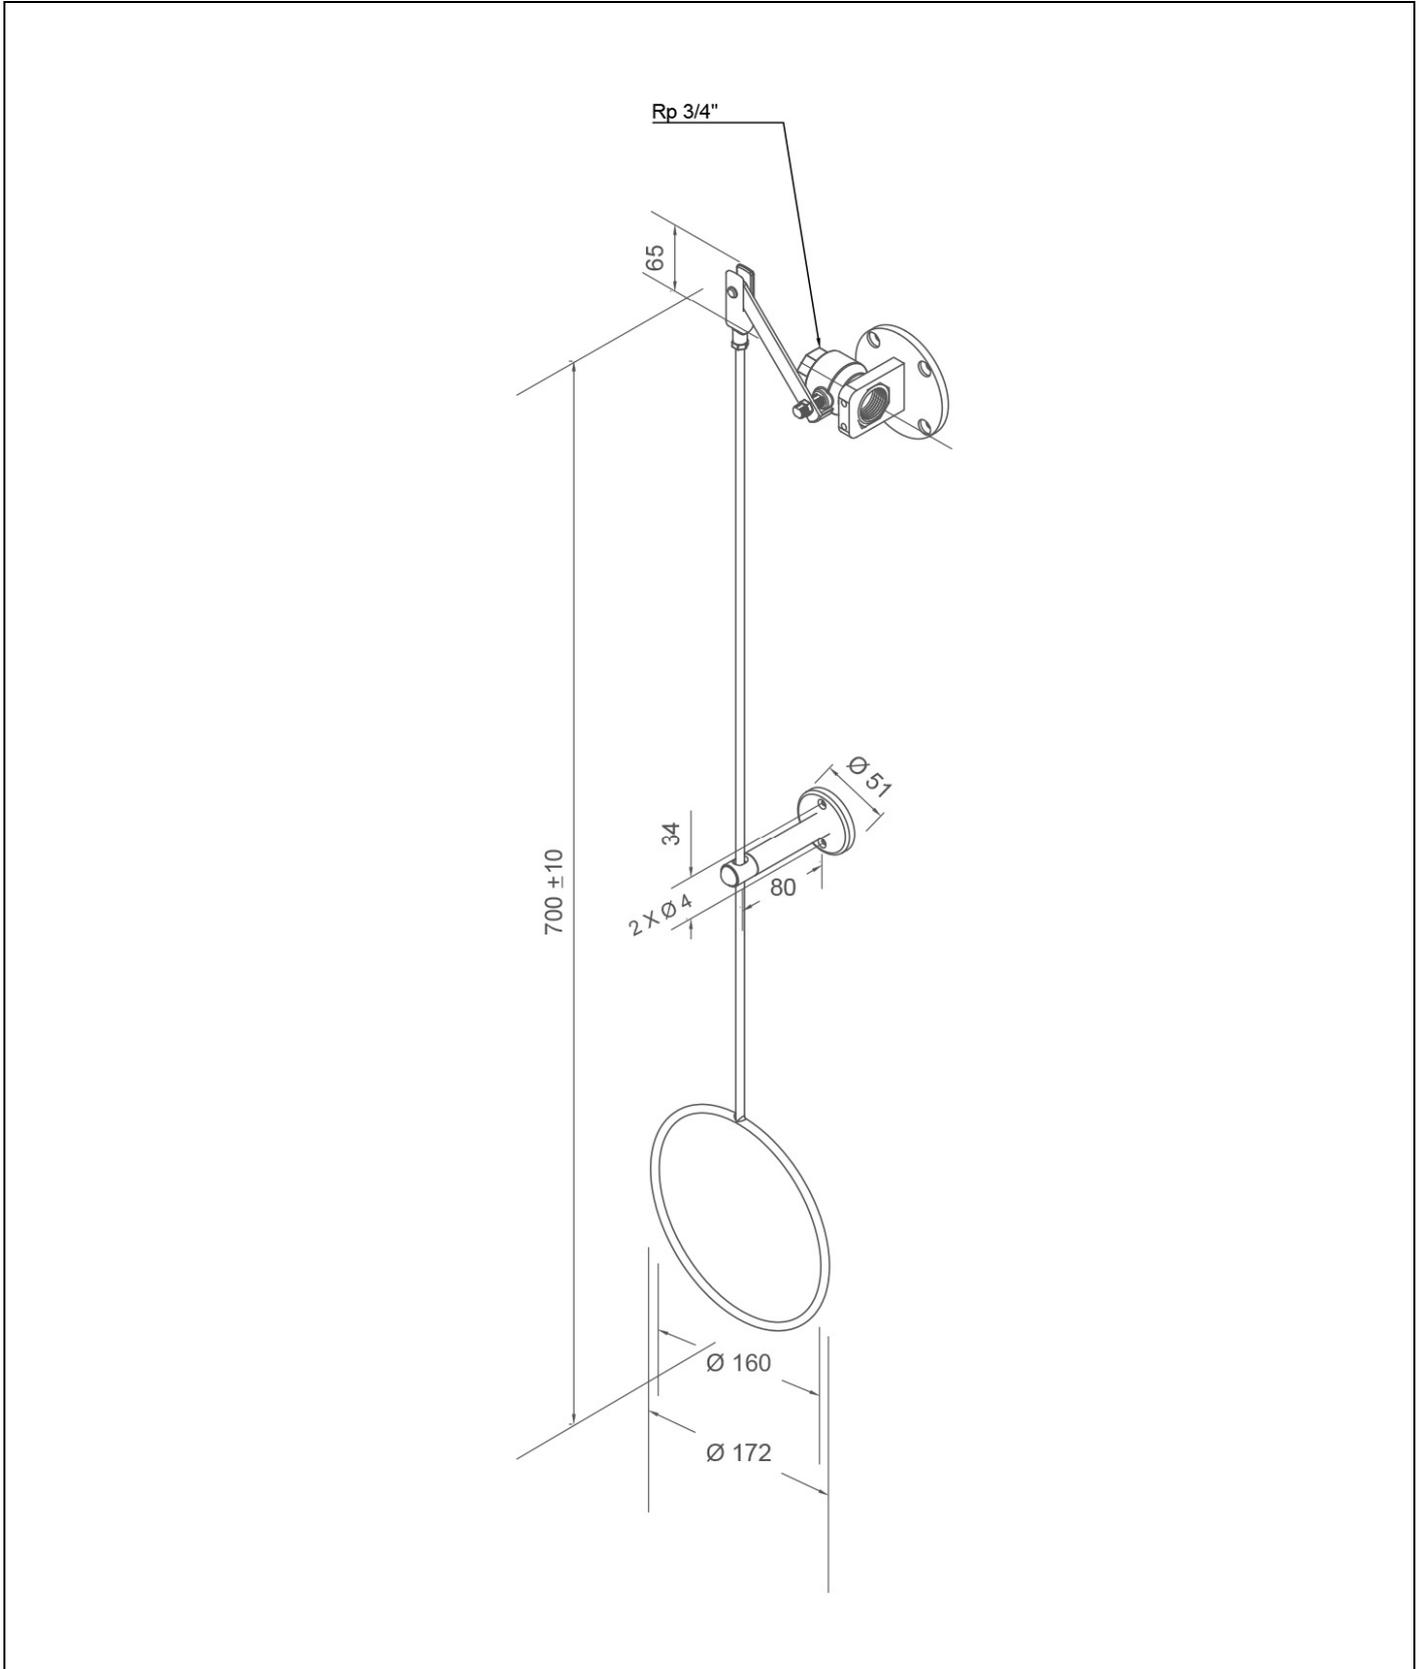

Technical description
PremiumLine rod operated safety shower valve, wall mounted, exposed pipework - ball valve with pull rod actuation on wall flange of stainless steel, can be mounted either on the right or left side of the door, DIN-DVGW tested and certificated, water inlet 3/4" female - flow rate at least 60 l/min at 1 bar flow pressure - pull rod with ring handle made of stainless steel, polished, length 700 mm - holder for pull rod made of stainless steel, polished - opening angle 90°, not self-closing - information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510 - mounting height for lower edge of pull rod handle according to the standards listed below: 0 to 1750 mm height above floor - according to BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717 - according to ANSI Z358.1-2014, DIN EN 15154-1:2006 and DIN EN 15154-5:2019 Manufacturer: B-SAFETY or equal Article-No.: BR 022 995

Technical specifications
Material: stainless steel
Surface: Polished
Dimensions (H x W x D): 700 x 172 x 80 mm
Operating pressure: 1 to 5 bar
Flow rate: at least 60 l/min at 1 bar flow pressure
Water inlet: 3/4" female

Norm conformity	Approvals
- DIN EN 15154-1:2006	- GOST-R, Zertifikats-Nr. 0615463
- DIN EN 15154-5:2019	
- ANSI Z358.1-2014	

Mounting-Instructions
For an installation in accordance with DIN EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

Material-overview	Material	Material description
Valve holder on flange:	stainless steel	AISI 316
Ball valve:	stainless steel	AISI 316
Lever:	stainless steel	AISI 316
Clevis:	stainless steel	AISI 316
Pull rod with ring handle:	stainless steel	AISI 316
Pull rod holder:	stainless steel	AISI 316
OPEN-Sign:	plastic	-

Product overview		
<table border="1"> <tr> <td><b>BR 022 995</b></td> <td>PremiumLine rod operated safety shower valve, wall mounted, exposed pipework</td> </tr> </table>	<b>BR 022 995</b>	PremiumLine rod operated safety shower valve, wall mounted, exposed pipework
<b>BR 022 995</b>	PremiumLine rod operated safety shower valve, wall mounted, exposed pipework	