


**BR 833 085**

**ClassicLine body safety shower with hand-held eye shower with one spray head 45°, floor mounted**

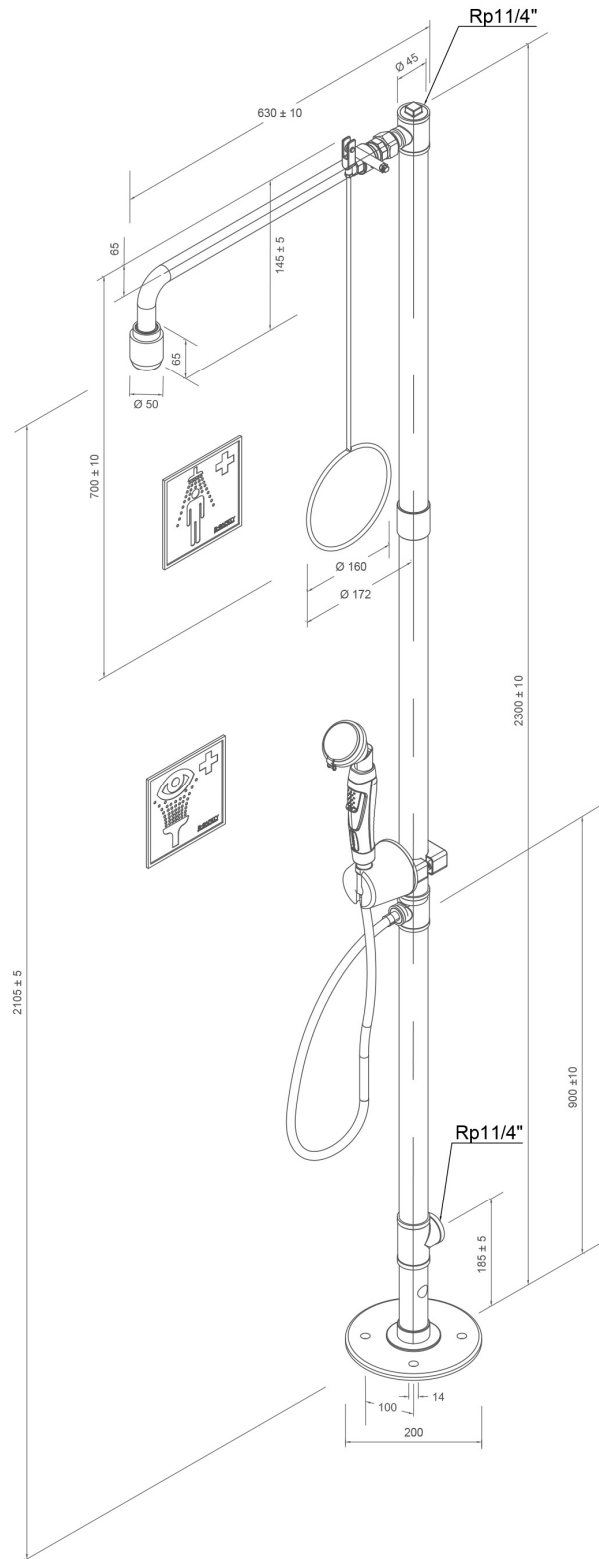

### Technical description

ClassicLine body safety shower with hand-held eye shower with one spray head 45°, floor mounted

- including top and bottom water inlet 1 1/4" female for installation in circulation lines, plug 1 1/4" of stainless steel
- base plate with 4 mounting holes of stainless steel, chemical resistant green powder coated, diameter 200 mm
- stand pipe 1 1/4" of stainless steel three-part, chemical resistant green powder coated, with top and bottom water inlet 1 1/4" female, total height 2300 mm
- connection piece of stainless steel, for easy installation and alignment of the shower
- ball valve 3/4" made of dezincification-resistant brass, with quick connect system and pull rod actuation, DIN-DVGW tested and certificated
- pull rod with ring handle of stainless steel, chemical resistant green powder coated, length 700 mm
- wall shower arm 3/4" of stainless steel, chemical resistant green powder coated, projection 630 mm
- integrated automatic flow regulation 50 l/min. for a spray pattern acc. to the norms at a specified operating range of 1.5 to 3 bar dynamic water pressure
- high-performance shower head of chemical resistant plastics, black, with improved spray pattern, corrosion resistant, largely scale and maintenance-free, very robust, self-draining
- sign for body safety shower according to ENISO 7010 und ASR A1.3, self-adhesive PVC-film, 150 x 150 mm, viewing distance 15 metre
- inclusive ClassicLine hand-held eye shower with one spray head 45°, for mounting on standpipe, position and orientation freely selectable
- ergonomically shaped handle with integrated, adjusting activation made of plastics, valve not self-closing
- high-performance spray head for large-scale dispersion of water, 45° angled, with plastic spray plate, largely free of calcification, with rubber sleeves and sealed dust caps
- integrated flow regulation 7 litre / minute for a standard-compliant jet pattern at a specified working range of 1.5 to 5 bar flow pressure
- integrated backflow preventer to protect the drinking water
- stainless steel covered hose, length 1.5 meter, water inlet 1/2" female, DIN-DVGW tested and certificated
- sturdy wall bracket with positioning of the shower, including mounting kit for mounting on the standpipe
- sign for eye shower according to ENISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- according to BGI/GUV-I 850-0, DIN 1988 and EN1717
- according to ANSI Z358.1-2014, EN15154-1:20006, EN15154-2:2006 and EN15154-5:2019
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal  
Article-No.: BR 833 085

### Technical specifications

Minimum flow pressure:	1.5 bar
Operating pressure:	1.5 to 3 bar
Flow rate body shower:	50 l/min
Flow rate eye shower:	7 l/min
Water inlet:	1 1/4" female
Dimensions (H x W x D):	2300 x 200 x 630 mm

### Compliance with standards

- EN15154-1:2006
- EN15154-2:2006
- EN15154-5:2019
- ANSI Z358.1-2014

### Approvals



- DIN-DVGW, DVGW, NW-0416CL0425
- DIN-DVGW, DVGW, NW-0417CL0263
- GOST-R, Zertifikats-Nr. 0615463








Material overview	Material	Material description
High-performance shower head:	plastic POM	-
Ball valve:	Dezincification-resistant, DZR brass	CW724R
Flow regulator:	plastic POM	-
Piping:	stainless steel	AISI 304
Pull rod with ring handle:	stainless steel	AISI 201
T-pieces, sleeve, plug:	stainless steel	AISI 316
Base plate:	stainless steel	AISI 201
Sign for body safety shower:	PVC-foil	-
Hand-held eye shower:	plastic Luran	-
Media-carrying parts of the hand-held eye shower:	brass, dezincification resistant (DZR)	CW724R (Ecobrass)
Covered hose of hand-held eye shower:	stainless steel, brass, plastic TPSiV	AISI 316, CW617N
Flow regulator eye shower:	plastic POM	-
Spray head eye shower:	plastic POM, EPDM	-
Sign for eye shower for eye shower:	PVC-Folie	-



Product overview	
<b>BR 833 085</b>	ClassicLine body safety shower with hand-held eye shower with one spray head 45°, floor mounted - flow rate 50 l/min (hazard class I according to EN15154-5:2019)
<b>BR 833 085 / 75L</b>	ClassicLine body safety shower with hand-held eye shower with one spray head 45°, floor mounted - flow rate 75 l/min / 20 GPM (hazard class II according to EN15154-5:2019)
<b>BR 833 085 / 110L</b>	ClassicLine body safety shower with hand-held eye shower with one spray head 45°, floor mounted - flow rate 110 l/min (hazard class III according to EN15154-5:2019)

## Accessories for industrial safety showers

Product overview	Model	Material	Water inlet	Water outlet	Article-No.
	Safety sign "Eye Shower and Safety Shower"  Inclusive fastening for mounting on the shower arm.  Dimensions: 320 x 180 mm	PVC	-	-	<b>BR 870 100</b>
	Platform actuation for eye showers and safety showers, in addition to the standard actuation.	steel, galvanised	-	-	<b>BR 870 200</b>
	Platform actuation for eye showers and safety showers, in addition to the standard actuation.	stainless steel	-	-	<b>BR 870 205</b>

	Maintenance ball valve for eye showers and safety showers with removable trigger lever.	stainless steel	1 1/4" female	1 1/4" male	<b>BR 830 950</b>
	Thermostatic mixing valve for eye showers and safety showers, adjustment range 20 - 43°C, scald protection 43°C, flow rate 60 l/min at 2 bar flow pressure.	brass	3/4" male and 1" male	3/4" male and 1" male	<b>BR 710 950</b>
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable.	brass	1 1/4" female	1 1/4" female	<b>BR 710 860</b>
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable. EX-Zone 1 & 2.	brass	1 1/4" female	1 1/4" female	<b>BR 710 860EX</b>
	Switch for body safety shower alarm, complete pre-assembled on shower. EX-Zone 1 & 2.	plastic	-	-	<b>BR 830 400</b>
	Switch for eye shower alarm, complete pre-assembled on shower. EX-Zone 1 & 2.	plastic	-	-	<b>BR 830 450</b>
	Alarm system for eye showers & safety showers with siren-/flashlight combination. Prewired junction box inclusive electronic switch.  Electrical supply: 230 V - 50 Hz	-	-	-	<b>BR 015 800</b>
	Anti-scald valve, switching points: open at 41°C, close at 35°C.	stainless steel	1/2" female	1/2" female	<b>BR 830 970</b>
	Frost protection valve, switching points: open at 1°C, close at 4°C.	stainless steel	1/2" female	1/2" female	<b>BR 830 980</b>
	Connection adapter 1 1/4", T-piece, for connection of the protection valves before the safety shower water connection.	stainless steel	1 1/4" female	1 1/4" male 1/2" male	<b>BR 830 986</b>
	Catch basin of stainless steel, with a GRP step grate for eye showers and safety showers.  Dimensions: 1100 x 1100 x 150 mm	stainless steel, GRP	-	1 1/4" male	<b>BR 830 700</b>
	Housing for safety showers with a stainless steel frame and stainless steel side walls.  Dimensions: 2450 x 1100 x 1100 mm	stainless steel	-	-	<b>BR 830 905</b>

[www.b-safety.com](http://www.b-safety.com)

	ANSI flange for eye showers and safety showers, B16.5, 150 LBS, form RF. Inclusive double nipple to 1 1/4" male.	stainless steel AISI 316	ANSI-flange 1 1/4"	1 1/4" male	<b>BR 014 114</b>
	DIN flange for eye showers and safety showers, PN 10, with mounting. Inclusive double nipple to 1 1/4" male.	stainless steel AISI 316	DIN-flange 1 1/4"	1 1/4" male	<b>BR 016 114</b>