


BR 305 195

**PremiumLine self-draining eye shower with stainless steel bowl, floor mounted**

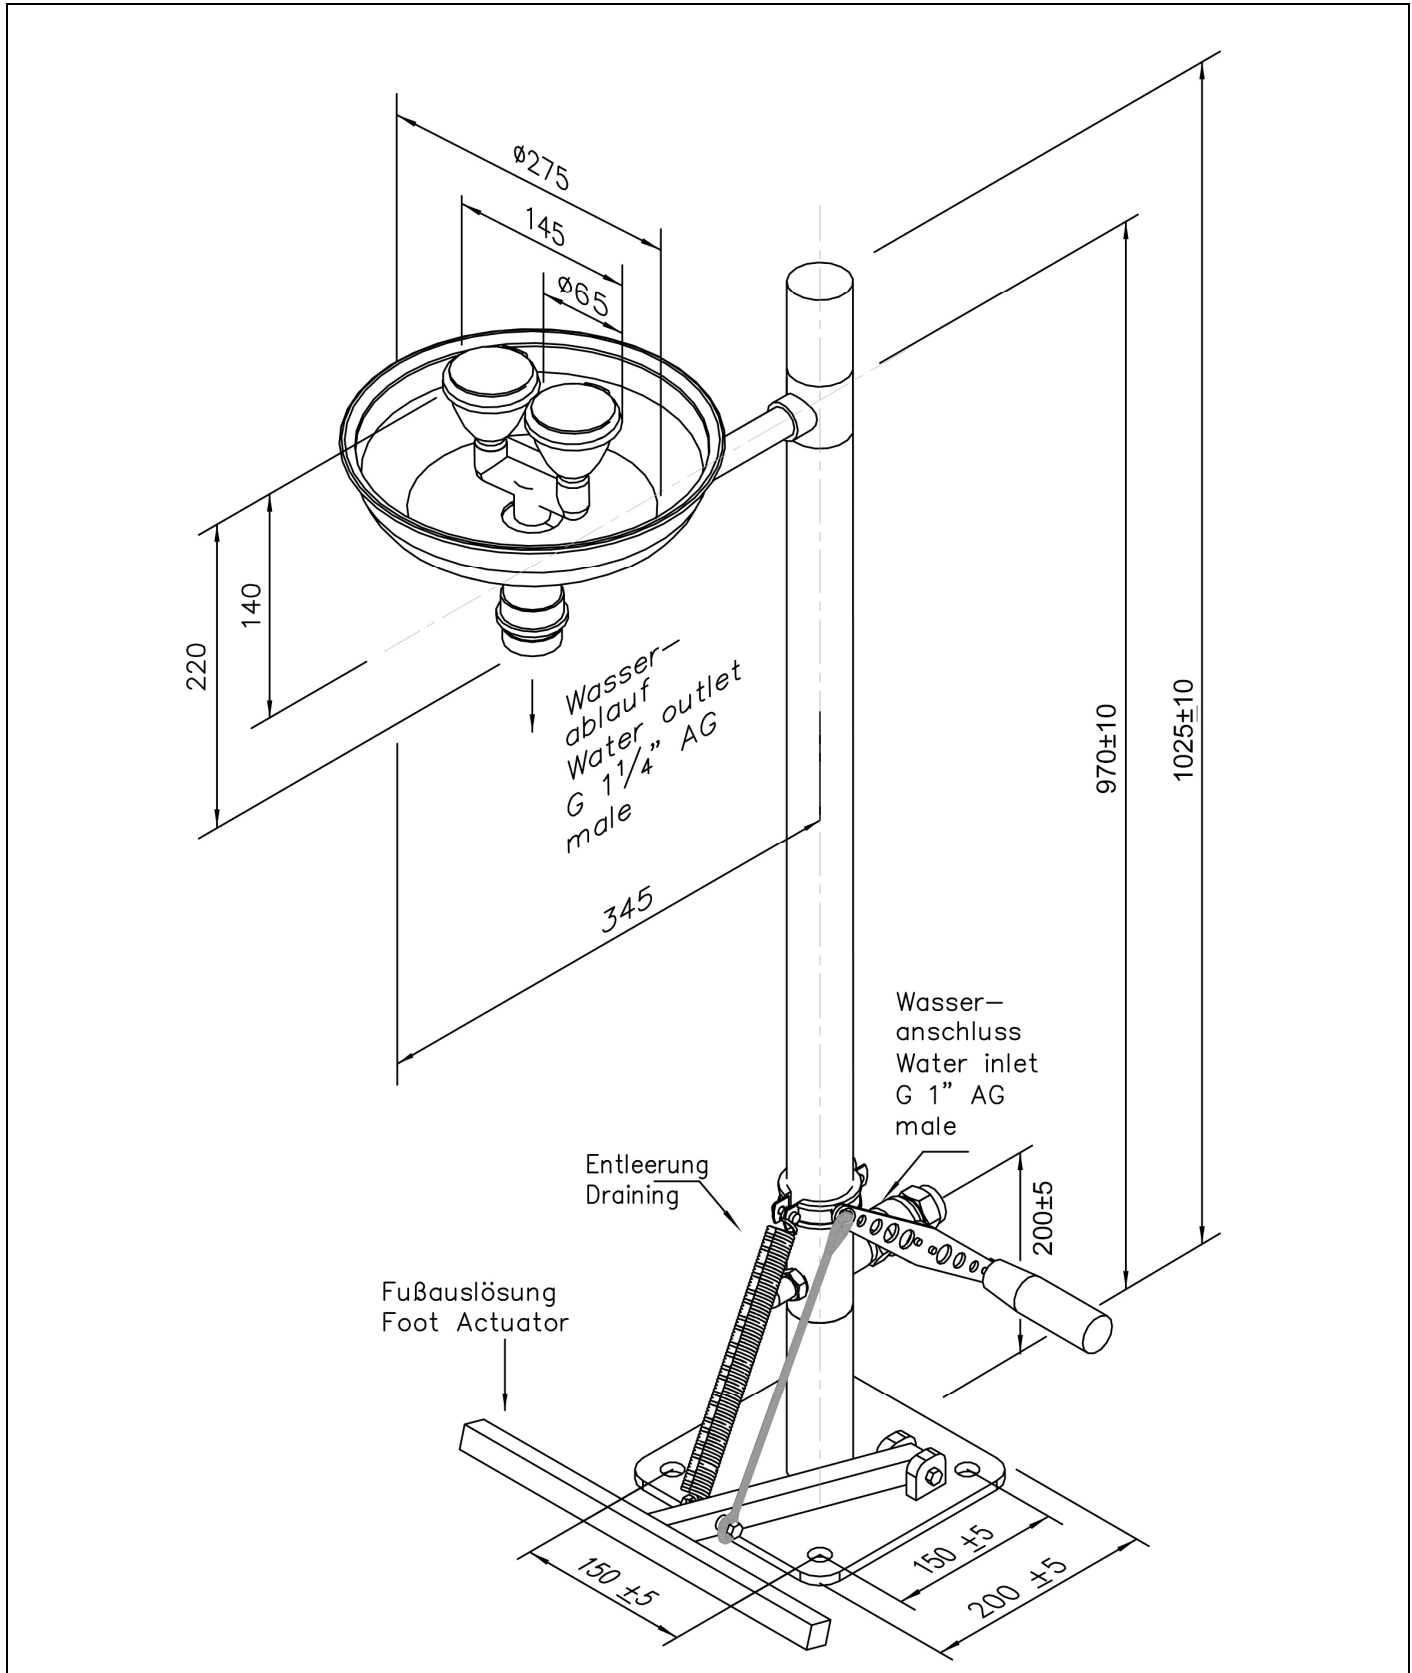

#### Technical description

B-SAFETY PremiumLine self-draining eye shower with stainless steel bowl, floor mounted

- base plate with 4 mounting holes of stainless steel, polished, dimensions 200 x 200 mm
- stand pipe 1 1/4" of stainless steel, polished, with top and bottom water inlet 1 1/4" female, total height 1025 mm
- ball valve 1" of stainless steel, foot lever actuation of stainless steel, inclusive self-draining to the upper edge of the ball valve near the bottom, water inlet 1" male, DIN-DVGW tested and certificated
- foot lever in the shape of a T of stainless steel profile, covered with black non-slip tape, total width 350 mm
- connection pipe of stainless steel for easy installation and alignment of the shower, polished
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- high-performance spray heads made of stainless steel for large-scale dispersion of water, with plastic spray plate, largely free of calcification, with rubber sleeves and sealed dust caps with folding mechanism, mounted over distributor fork
- bowl made of stainless steel, diameter 275 mm, polished, water outlet 1 1/4" male
- sign for eye shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- total height 1025 mm, projection 345 mm, total width incl. lever 425 mm
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014 and EN 15154-2:2006
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal  
Article-No.: BR 305 195

#### Technical specifications

Minimum flow pressure:	2.5 bar
Operating pressure:	2.5 to 5 bar
Flow rate:	14 l/min
Water inlet:	1" male
Water outlet:	1 1/4" male
Material:	Stainless steel
Surface:	Polished
Ball valve:	Stainless steel
High-performance spray heads:	Stainless steel

#### Compliance with standards

- EN 15154-2:2006  
- ANSI Z358.1-2014





#### Approvals

- DIN-DVGW, DVGW, NW-0417CL0263  
- GOST-R, Zertifikats-Nr. 0615463

#### Product overview

<b>BR 305 195</b>	PremiumLine self-draining eye shower with stainless steel bowl, floor mounted
-------------------	---

## Zubehör für Sicherheits-Augenduschen

Produktübersicht	Ausführung	Material	Wasseranschluss	Wasserabgang	Artikel-Nr.
	Maintenance ball valve for eye showers and safety showers with removable trigger lever.	stainless steel	1 1/4" female	1 1/4" female	<b>BR 830 950</b>
	Thermostatic mixing valve for eye showers and safety showers, adjustment range 20 - 43°C, scald protection 43°C, flow rate 60 l/min at 2 bar flow pressure.	brass	3/4" male and 1" male	3/4" male and 1" male	<b>BR 710 950</b>
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable.	brass	1 1/4" female	1 1/4" female	<b>BR 710 860</b>
	Alarm system for eye showers & safety showers with siren-/flashlight combination. Prewired junction box inclusive electronic switch.  Electrical supply: 230 V - 50 Hz	-	-	-	<b>BR 015 800</b>