


BR 305 395

PremiumLine frostprotected self-draining eye shower, with underfloor actuation

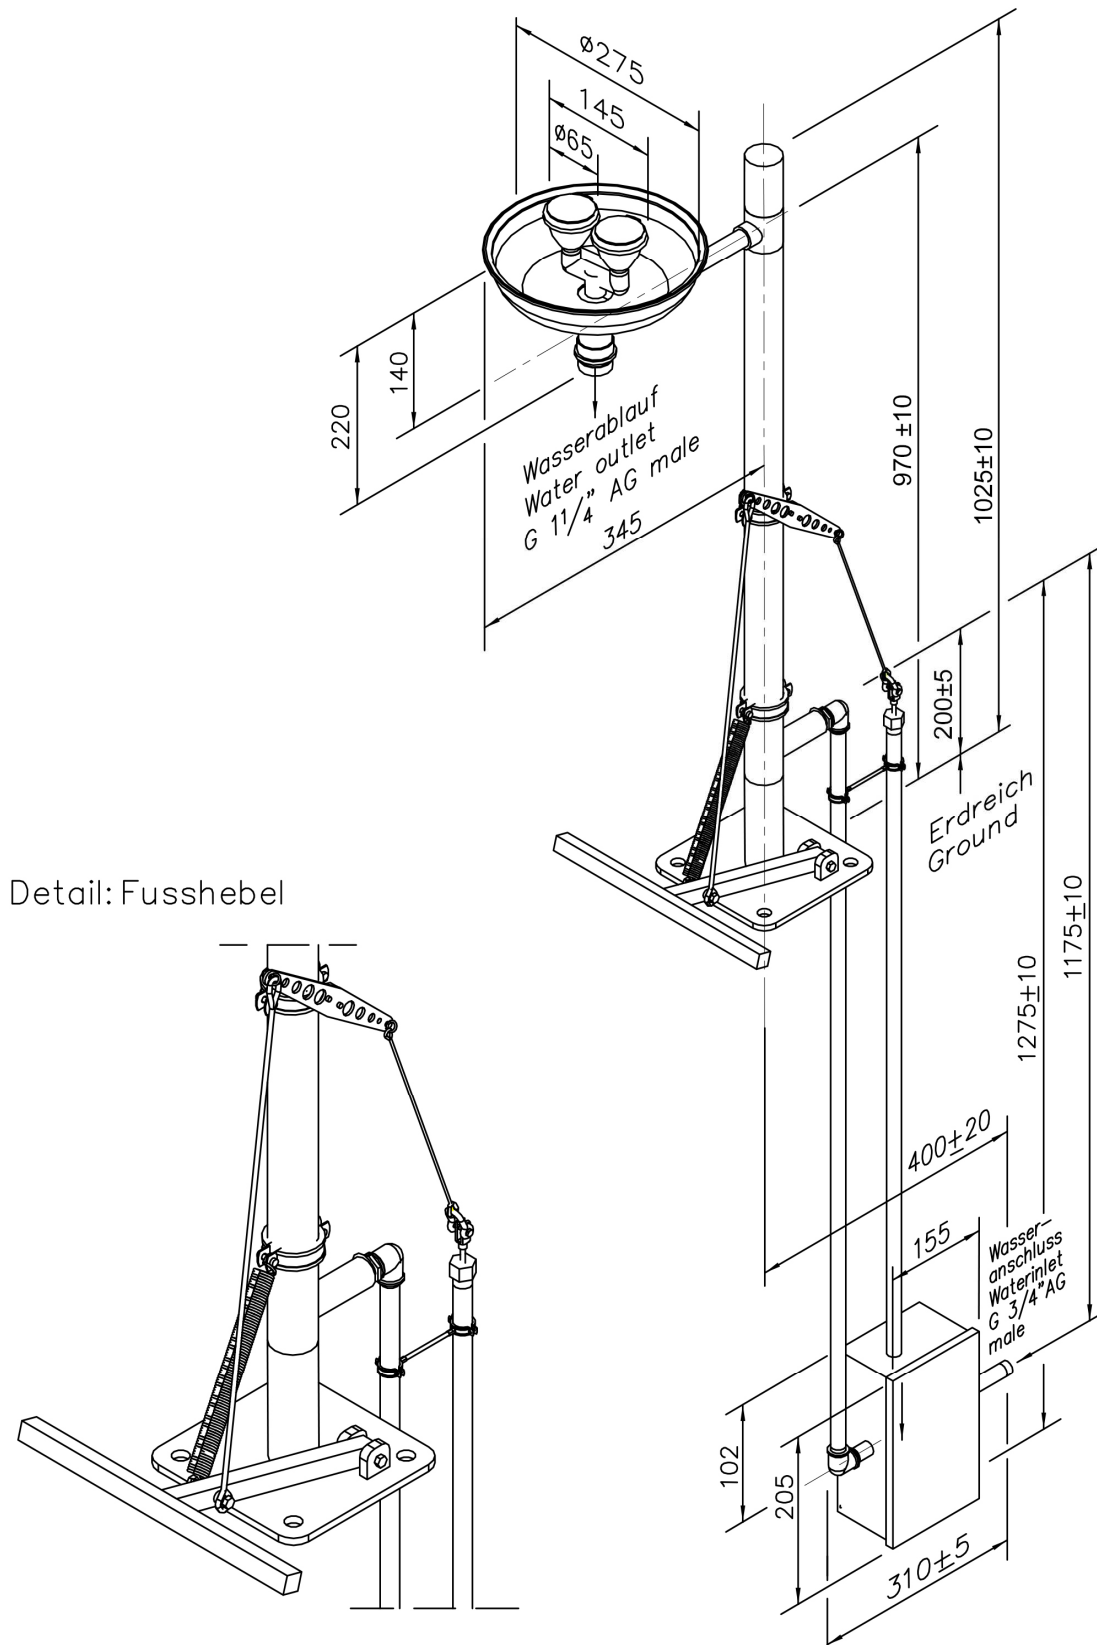

Technical description

PremiumLine frostprotected self-draining eye shower, with underfloor actuation

- actuation with stainless steel foot lever in the shape of a T, covered with black non-slip tape, width 350 mm, mounting via stainless steel cable on angle diversion
- angle diversion to pull rod made of stainless steel, with mounting accessories made of stainless steel
- ball valve made of stainless steel as underfloor actuation, mounted in stainless steel cabinet, with pull rod activation 1000 mm, DIN-DVGW tested and certificated, with automatic self-draining in 1000 mm depth
- base plate with 4 mounting holes of stainless steel, polished, dimensions 200 x 200 mm
- stand pipe 1 1/4" of stainless steel, polished, with bottom water inlet 1 1/4" female, height above floor 1040 mm
- connection pipe of stainless steel for easy installation and alignment of the shower, polished
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- high-performance spray heads made of stainless for large-scale dispersion of water, polished, with plastic spray plate, low calcification, incl. rubber sleeves and sealed dust caps, mounted over distributor fork
- bowl made of stainless steel, diameter 275 mm, polished, water outlet 1 1/4" male
- sign for eye shower according to DIN EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- height above floor 1040 mm, projection 380 mm, width 350 mm
- according to BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717
- according to ANSI Z358.1-2014 and DIN EN 15154-2:2006

Manufacturer: B-SAFETY or equal
Article-No.: BR 305 395

Technical specifications

Minimum flow pressure:	2.5 bar
Operating pressure:	2.5 to 5 bar
Flow rate:	14 l/min
Water inlet:	3/4 male
Water outlet:	1 1/4 male
Dimensions (H x W):	1040 x 350 mm

Compliance with standards

- EN 15154-2:2006
- ANSI Z358.1-2014

Approvals

- DIN-DVGW, DVGW, NW-0417CL0263
- GOST-R, Zertifikats-Nr. 0615463

Material overview

Material

Material description

High-performance shower head:	stainless steel	AISI 316
U-distributor:	stainless steel	AISI 304
Ball valve:	stainless steel	AISI 316
Angle diversion:	stainless steel	AISI 304
Foot lever:	stainless steel	AISI 304
Flow regulator:	plastic POM	-
Piping, T-pieces, adapter:	stainless steel	AISI 316
Bowl:	stainless steel	AISI 304
Base plate:	stainless steel	AISI 316
Sign for eye shower:	PVC-foil	-

www.b-safety.com

Product overview	
BR 305 395	PremiumLine frostprotected self-draining eye shower, with underfloor actuation

