

100130 FOR BS PIPE



TWO-way ball valve

Drive: Inox lever

Connection: **CLAMP normative DIN 32676 TAB.4 REIHE C**
For TUBE according to normative BS/OD (ASTM A270)

Flow: Full and reduced

Material: Aisi 304L (1.4307) – Aisi 316L (1.4404)

Measure: from 1/2" to 4"

Seals: Modified Virgin P.T.F.E.

Operating temperature: -20°C+170°C

Outer finish: Polished

On request:

Antistatic device ATEX:

II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db

M.O.C.A. CE 1935/2004


• Seals made of:

PTFE with glass -20°C+170°C

PTFE with carbographite -20°C+180°C

PTFE with inox -20°C+200°C

UHMW High-molecular weight polyethylene -20°C+80°C

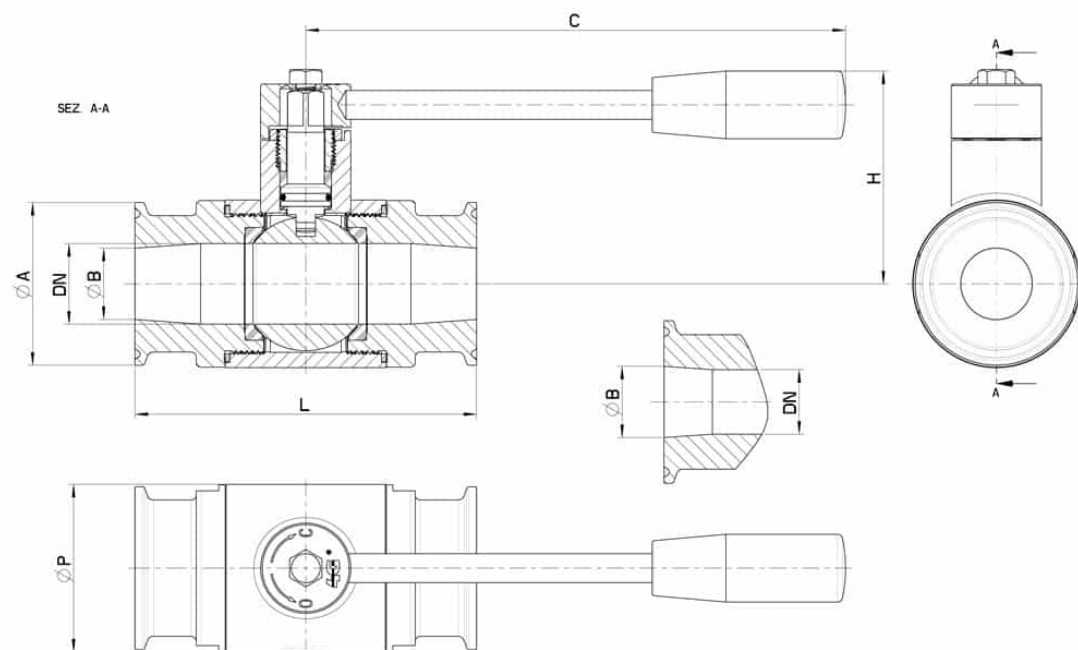

CLAMP	DN	L	Ø A	Ø B	C	H	ØP	PN	Kg	COD. AISI 304L	COD. AISI 316L
1/2"	10	88	25	9,4	110	50	30	100	0,43	-	100130 61210
3/4"	15	92	25	15,75	110	55	35	100	0,52	-	100130 61810
1"	20	102	50,5	22,1	110	58	42	100	0,93	-	100130 62410
1"	25	106	50,5	22,1	160	65	52	64	1,35	-	100130 62610
1"1/2	32	112	50,5	34,8	160	74	60	64	1,42	-	100130 63210
1"1/2	40	126	50,5	34,8	190	92	73	64	2,43	-	100130 63410
2"	50	136	64	47,5	190	110	88	40	3,51	-	100130 63810
2"1/2	65	154	77,5	60,2	220	115	113	40	5,80	-	100130 64410
3"	80	184	91	72,9	285	130	135	40	9,00	100130 44810	100130 64810
4"	100	190	119	97,38	310	150	167	25	13,60	100130 45410	100130 65410



