

100130 FOR ISO PIPE



TWO-way ball valve

Drive: Inox lever

Connection: **CLAMP normative DIN 32676 TAB.3 REIHE B**
For TUBE according to normative ISO 1127

Flow: Full and reduced

Material: AISI 316L (1.4404)

Measure: from DN10 to DN100

Seals: Modified Virgin P.T.F.E.

Operating temperature: -20°C +170°C

Outer finish: Polished

On request:

Antistatic device ATEX:

II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db

M.O.C.A. CE 1935/2004


• Seals made of:

PTFE with glass -20°C+170°C


PTFE with carbographite -20°C+180°C

PTFE with inox -20°C+200°C

UHMW High-molecular weight polyethylene -20°C+80°C

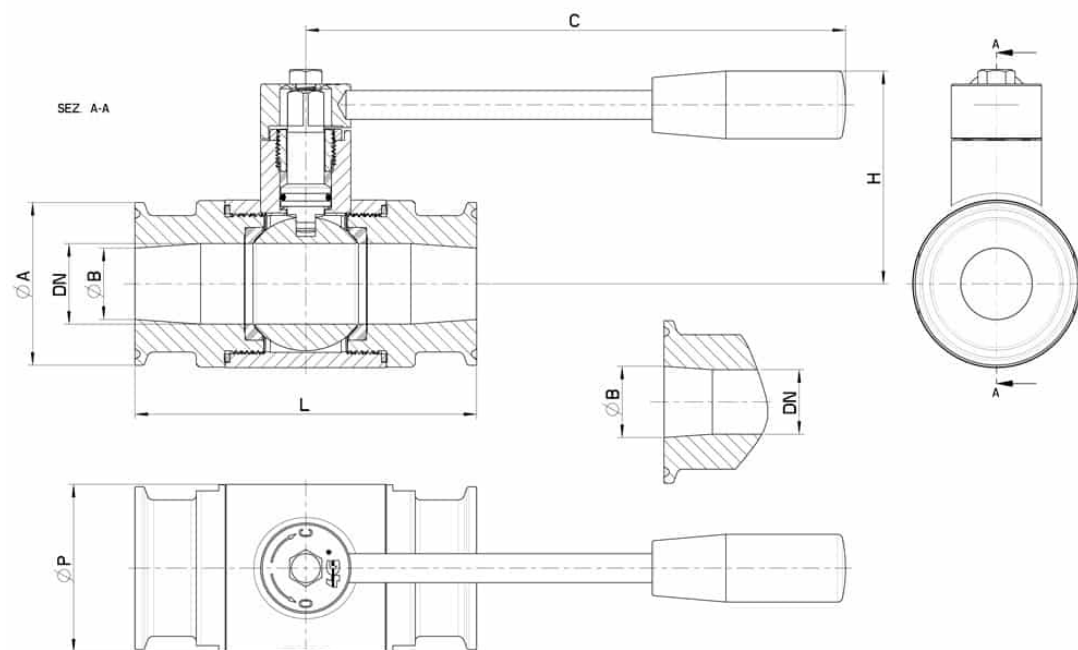

CLAMP REIHNE B OD	DN	L	Ø A	Ø B	C	H	ØP	PN	Kg	CODE AISI 316L
13.5	10	88	25	10.3	110	50	30	100	0,43	100130 61110
17.2	15	92	25	14	110	55	35	100	0,52	100130 61710
21.3	20	102	50.5	18.1	110	60	42	100	0,93	100130 62310
26.9	25	106	50,5	23.7	160	65	52	64	1,35	100130 62510
33.7	25	106	50,5	29.7	160	65	52	64	1,33	100130 62710
33.7	32	112	50,5	29.7	160	70	60	64	1,42	100130 63110
42.4	40	126	64	38.4	190	80	73	64	2,43	100130 63310
48.3	40	126	64	44.3	190	80	73	64	2,43	100130 63710
60.3	50	136	77.5	56.3	190	90	88	40	3,51	100130 64110
76.1	65	154	91	72.1	220	110	113	40	5,80	100130 64710
88.9	80	184	106	84.3	285	130	135	40	9,00	100130 65110
114.3	100	190	130	109.7	310	150	167	25	13,60	100130 65310

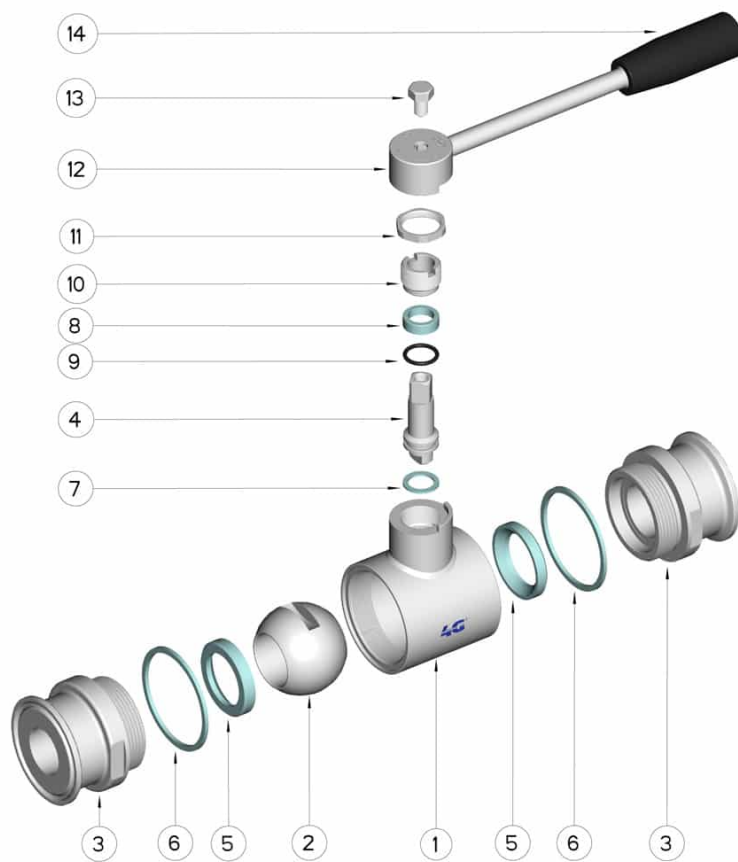

POSITION	DENOMINATION	PIECES	MATERIAL
1	Body	1	AISI (304L) 316L
2	Ball	1	AISI (304L) 316L
3	Sleeves	2	AISI (304L) 316L
4	Stem	1	AISI (304L) 316L
5	Ball Seals	2	PTFE Vergine Modificato
6	Sleeve Seals	2	PTFE
7	Stem Seal	1	PTFE
8	Stem Seal	1	PTFE
9	Stem or-Seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Locknut	1	AISI 304L
12	Lever	1	AISI 304L
13	SCREW	1	AISI 304L
14	Handle	1	DUROPLAST (PF)

