

S range + spur


Heavy duty Ductile cast iron JS1030 quarter turn gearbox range.
Standard IP 68 Enclosure and available in 14 sizes up to 32.000 Nm.
Insert system available. Optional with heavy duty Marine paint systems,
including C3, C4 and C5M.



Description	Material	Specs/Standard
Body	Ductile Cast Iron	JS1030
Cover	Ductile Cast Iron	JS1030
Position Indicator	Ductile Cast Iron	JS1030
Quadrant	Ductile Cast Iron	JS1030
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS316
Reducer gears	Carbon Steel	C45
Gasket	Nitrile	NBR70
O rings	Nitrile	NBR70
Grease	Lithium	EP2
Fasteners	Stainless Steel	A2
Axial Needle Bearing	Steel	AS/AXK

Type	Torque	Ratio	MA +/- 15%	Weight (Kg)
S400/2	4.000 Nm	1:110	34	22
S700/6	7.000 Nm	1:312	65	41
S900/4	9.000 Nm	1:279	80	48
S1100/6	11.000 Nm	1:372	105	48
S1700/6	17.000 Nm	1:468	138	74

Type	Torque	Ratio	MA +/- 15%	Weight (Kg)
S2600/10	26.000 Nm	1:660	208	142
S3200/10	32.000 Nm	1:798	224	194

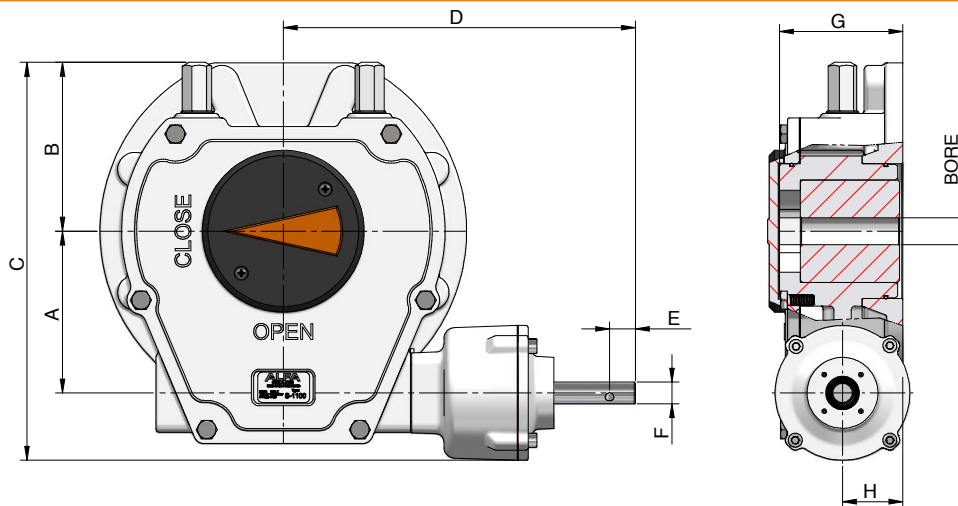

Type	A	B	C	D	E	F	G	H	Max. Bore/key	ISO 5211
S400/2	105	129	281	238	24	∅20	100	55	∅70 / 20	F12-F14-F16
S700/6	130	143	335	310	24	∅20	115	57	∅75 / 22	F14-F16-F25
S900/4	150	156	369	327	24	∅20	115	56	∅86 / 25	F16-F25-F30
S1100/6	150	156	369	327	24	∅20	115	56	∅86 / 25	F16-F25-F30
S1700/6	182	190	435	358	24	∅20	125	63	∅120 / 32	F25-F30-F35
S2600 /10	215	195	540	419	24	∅20	175	85	∅150 / 40	F25-F30-F35
S3200 /10	256	220	606	449	24	∅20	183	96	∅160 / 40	F25-F30-F35-F40