

PRESSURE CONTROL

Pressure reducing valve RP 810

High pressure valve for high to very high flow rates



Technical data

Connection DN	40 - 400
Nominal pressure PN	16 - 160
Inlet pressure	up to 160 bar
Outlet pressure	1 - 40 bar
K _{vs} value	20 - 900 m³/h
Temperature medium	130 °C liquids and gases

Description

Self-acting pressure reducers are simple control valves offering accurate control while being easy to install and maintain. They control the pressure downstream of the valve without requiring pneumatic or electrical control elements.

The RP 810 is a pilot-controlled control valve consisting of a main valve, a pilot valve complete with restrictor assembly and built-in strainer mounted on the cover of the main valve, non-return valve and restrictor valves. The valve cone can be fitted with a soft or metallic seal.

When the pipeline is depressurised the main valve is kept closed by a pre-loaded spring. When the outlet pressure is below the set pressure the pilot valve is kept open by its spring. The control medium can flow towards the valve outlet. Restrictor D1 produces a pressure drop causing the outlet pressure to be almost equal to the pilot pressure in the main valve piston. The inlet pressure overcomes the outlet pressure and closing force of the spring and opens the main valve.

As soon as the outlet pressure has reached the set pressure, the pilot valve restricts the flow. This causes the pilot pressure to rise and push the main valve piston into a controlling position. The restrictors D1 and D2 are used to optimise the control characteristics. The bypass fitted with a non-return valve ensures quick closing.

When the outlet pressure exceeds the set pressure the pilot valve closes. The pilot pressure is equal to the inlet pressure. The main valve closes as the piston diameter is greater than the valve seat. The spring also forces the valve to close.

These valves are no shut-off elements ensuring a tight closing of the valve. In accordance with DIN EN 60534-4 and/or ANSI FCI 70-2 they may feature a leakage rate in closed position in compliance with the leakage classes III or V.

Standard

- » Pilot valve made of stainless steel
- » Throttle block with integrated strainer and throttle valves completely made of stainless steel

Options

- » Version for gases
- » Hard-faced valve cone and seat
- » Special versions on request

Product



Picture similar

Technical specification

K_{vs} values [m³/h]


nominal diameter DN	40	50	65	80	100	125
K _{vs} value m³/h	20	32	50	60	70	150

K_{vs} values [m³/h]

nominal diameter DN	150	200	250	300	350	400
K _{vs} value m³/h	250	350	500	600	700	900

Setting ranges [bar], nominal pressure

1 - 5	4 - 12	10 - 20	15 - 40
PN 16-160/10	PN 16-160/16	PN 16-160/40	PN 16-160/63

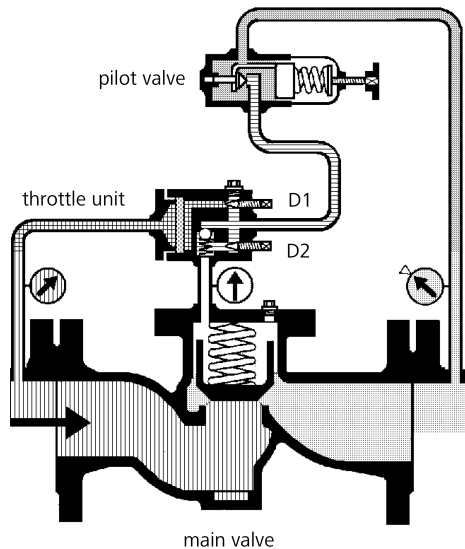

Please send us your enquiry and allow us to advise you. Special designs on request.
The pressure has always been indicated as overpressure. Mankenberg reserves the right to alter technical specifications without notice.



Pressure reducing valve RP 810

High pressure valve for high to very high flow rates

Materials

Materials		
Temperature	80 °C	130 °C
Body	PN 16	spheroidal cast iron or cast steel
	PN 160	cast steel
	PN 16 - 160	stainless steel
Cover	steel optional stainless steel	
Internals	stainless steel	stainless steel
Valve Seal	NBR	EPDM
O-Ring	NBR	EPDM
Pilot Valve, Throttle Unit	stainless steel	stainless steel

Dimensions and weights

Dimensions [mm]							
nominal pressure PN	size	nominal diameter DN					
		40	50	65	80	100	125
16	A*	200	230	290	310	350	400
40	A*	200	230	290	310	350	400
63 - 160	A*	260	300	340	380	430	
all PN	B	200	220	250	260	280	290
all PN	C	140	160	180	220	220	230

Dimensions [mm]							
nominal pressure PN	size	nominal diameter DN					
		150	200	250	300	350	400
16	A*	480	600	730	850	980	1100
40	A*	480	600	730	850	980	
63 - 160	A*	550	650				
all PN	B	330	390	420	550	550	550
all PN	C	240	270	290	350	350	410

*overall length tolerances in acc. with DIN EN 558

Weights [kg]													
nominal pressure PN	nominal diameter DN												
	40	50	65	80	100	125	150	200	250	300	350	400	
16	25	30	40	50	70	120	150	210	380	450	520	625	
40	33	38	48	65	80	140	160	240	440	510	580		
63 - 160	40	45	55	80	110		165	290					


Customs tariff number

84811019

Recommended installation

- | | |
|--------------------|--------------------|
| 1 Strainer | 4 Safety valves |
| 2 Shut-off valves | 5 Pressure gauge |
| 3 Pressure reducer | 6 Sense line G 1/2 |

Sense line connection 10 x DN before and behind the valve

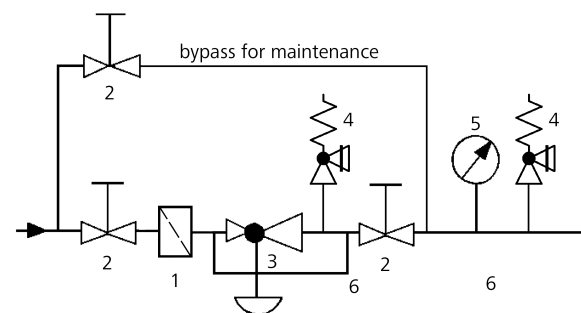

Please send us your enquiry and allow us to advise you. Special designs on request.
 The pressure has always been indicated as overpressure. Mankenberg reserves the right to alter technical specifications without notice.

Mankenberg GmbH
 Spenglerstrasse 99
 D-23556 Luebeck | Germany

Phone: +49 (0) 451-8 79 75 0
 Fax: +49 (0) 451-8 79 75 99

info@mankenberg.de
 www.mankenberg.com

Technische Daten

Anschluss DN	40 - 400
Nenndruck PN	16 - 160
Vordruck	bis 160 bar
Hinterdruck	1 - 40 bar
K _{vs} -Wert	20 - 900 m³/h
Temperatur	130 °C
Medium	Flüssigkeiten und Gase

Beschreibung

Selbsttätig regelnde Druckminderer sind einfache Basisregler, die genaue Regelung bei leichter Installation und Wartung bieten. Sie regeln den Druck hinter dem Ventil ohne pneumatische oder elektrische Steuerteile.

Das RP 810 ist ein pilotgesteuertes Regelventil, bestehend aus dem Hauptventil mit auf dem Deckel fest montiertem Pilotventil und Drosselblock mit integriertem Schmutzfänger, Rückschlagventil und Drosselventilen. Der Ventilkegel ist metallisch-oder weichdichtend ausgeführt.

Liegt der Hinterdruck unter dem eingestellten Sollwert, wird das Pilotventil durch seine Feder offen gehalten. Das Steuermedium fließt zum Ventilausgang ab. Die Drossel D1 bewirkt einen Druckabfall, so dass der Steuerdruck im Kolben des Hauptventils nahezu dem Hinterdruck entspricht. Der Vordruck überwindet Hinterdruck und Schließfederkraft und öffnet das Hauptventil.

Wenn der Hinterdruck den eingestellten Sollwert erreicht hat, drosselt das Pilotventil. Der Steuerdruck steigt dadurch und drückt den Kolben des Hauptventils in eine regelnde Position. Die Drosseln D1 und D2 dienen zur Optimierung des Regelverhaltens. Der mit einem Rückschlagventil ausgestattete Bypass bewirkt ein schnelles Schließen.

Wenn der Hinterdruck den Sollwert übersteigt, schließt das Pilotventil. Der Steuerdruck entspricht dem Vordruck. Das Hauptventil schließt, da der Durchmesser des Kolbens größer ist als der Ventilsitz. Zusätzlich wirkt auch die Feder schließend.

Diese Ventile sind keine Absperrorgane, die einen dichten Ventilabschluss gewährleisten. Sie können in der Schließstellung nach DIN EN 60534-4 und/oder ANSI FCI 70-2 eine Leckrate entsprechend der Leckageklassen III oder V aufweisen.

Standard

- » Pilotventil aus Edelstahl
- » Drosselblock mit integriertem Schmutzfänger und Drosselventilen kompl. aus Edelstahl

Optionen

- » Ausführung für Gase
- » Ventilkegel und Sitz gepanzert
- » Sonderausführungen auf Anfrage

Produkt



Abbildung ähnlich

Technische Spezifikation

K_{vs}-Werte [m³/h]


Nennweite DN	40	50	65	80	100	125
K _{vs} -Wert m³/h	20	32	50	60	70	150

K_{vs}-Werte [m³/h]

Nennweite DN	150	200	250	300	350	400
K _{vs} -Wert m³/h	250	350	500	600	700	900

Einstellbereiche [bar], Nenndruck

1 - 5	4 - 12	10 - 20	15 - 40
PN 16-160/10	PN 16-160/16	PN 16-160/40	PN 16-160/63

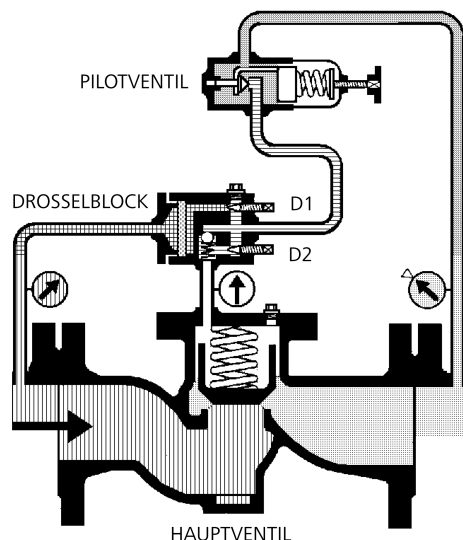

Werkstoffe

Werkstoffe		
Temperatur	80 °C	130 °C
Gehäuse	PN 16	Sphäroguss oder Stahlguss
	PN 160	Stahlguss
	PN 16 - 160	Edelstahl
Deckel	Cr-Stahl optional Edelstahl	
Innenteile	Edelstahl	Edelstahl
Ventildichtung	NBR	EPDM
O-Ring	NBR	EPDM
Pilotventil, Drosselblock	Edelstahl	Edelstahl

Abmessungen und Gewichte

Abmessungen [mm]							
Nenndruck PN	Maß	Nennweite DN					
		40	50	65	80	100	125
16	A*	200	230	290	310	350	400
40	A*	200	230	290	310	350	400
63 - 160	A*	260	300	340	380	430	
alle PN	B	200	220	250	260	280	290
alle PN	C	140	160	180	220	220	230

Abmessungen [mm]							
Nenndruck PN	Maß	Nennweite DN					
		150	200	250	300	350	400
16	A*	480	600	730	850	980	1100
40	A*	480	600	730	850	980	
63 - 160	A*	550	650				
alle PN	B	330	390	420	550	550	550
alle PN	C	240	270	290	350	350	410

*Baulängentoleranzen gemäß DIN EN 558


Gewichte [kg]												
Nenndruck	Nennweite DN											
	40	50	65	80	100	125	150	200	250	300	350	400
PN 16	25	30	40	50	70	120	150	210	380	450	520	625
PN 40	33	38	48	65	80	140	160	240	440	510	580	
PN 63 - 160	40	45	55	80	110		165	290				

Zolltarifnummer	
84811019	

Einbauschema

- | | |
|---------------------|-----------------------|
| 1 Schmutzfänger | 4 Sicherheitsventil |
| 2 Absperrventile | 5 Manometer |
| 3 Druckminderventil | 6 Steuerleitung G 1/2 |

Steuerleitungsanschluss 10 mal DN vor und hinter dem Ventil.

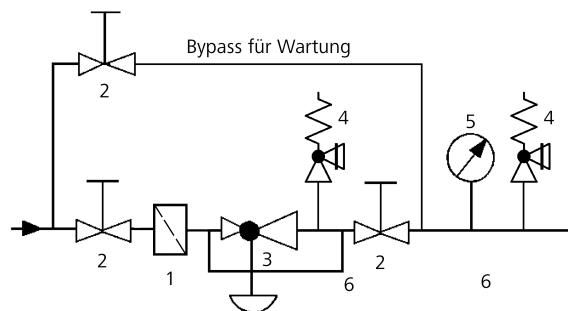

Sprechen Sie uns an und lassen Sie sich beraten. Alle Druckangaben als Überdruck angegeben. Sonderausführungen auf Anfrage. Technische Änderungen vorbehalten.

Mankenberg GmbH
Spenglerstraße 99
D-23556 Lübeck | Germany

Phone: +49 (0) 451-8 79 75 0
Fax: +49 (0) 451-8 79 75 99

info@mankenberg.de
www.mankenberg.com

技术参数

接口 DN	40 - 400
公称压力 PN	16 - 160
阀前压力	至 160 bar
阀后压力	1 - 40 bar
K _{vs} -值	20 - 900 m³/h
温度	130 °C
介质	液体，气体

描述

自力式减压阀是简单的基本调节阀,在简便安装和维护条件下精确调节。它们调节阀后压力无需气动或电控部件。

减压阀 RP 810 为先导控制的调节阀,包括主阀带固定在阀盖上的先导阀和集成除尘器、止回阀和节流阀的节流阀块。阀锥采用金属密封或软密封。

阀后压力低于设定值时,先导阀通过弹簧保持开启。控制介质流向阀门出口。节流阀 D1 制造了一个压力落差,从而使主阀活塞的控制压力几近阀后压力。阀前压力超过阀后压力和弹簧的关闭力,打开主阀。

当阀后压力达到设定值后,先导阀节流。控制压力由此升高,将主阀的活塞推至调节位。节流阀 D1 和 D2 用于优化调节。带止回阀的旁路引起快速关闭。当阀后压力超过设定值时,先导阀关闭,控制压力相当阀前压力。主阀关闭,因活塞直径大于阀座直径。弹簧也另外帮助关闭。

此阀门不是能够完全保证密封的截止阀。它们根据 DIN EN 60534-4 和/或 ANSI FCI 70-2 标准要求按关闭设置不同有 III 或 V 级的泄漏等级。

标准配置

- » 不锈钢先导阀
- » 内部集成除尘器和节流阀的节流阀块,整体采用不锈钢

可选配置

- » 用于气体设计
- » 用于气体设计
- » 特殊设计请垂询

产品




类似插图

技术参数

K _{vs} -值 [m³/h]						
公称直径 DN	40	50	65	80	100	125
K _{vs} -值 m³/h	20	32	50	60	70	150

K _{vs} -值 [m³/h]						
公称直径 DN	150	200	250	300	350	400
K _{vs} -值 m³/h	250	350	500	600	700	900

设定范围 [bar], 公称压力			
1 - 5	4 - 12	10 - 20	15 - 40
PN 16-160/10	PN 16-160/16	PN 16-160/40	PN 16-160/63

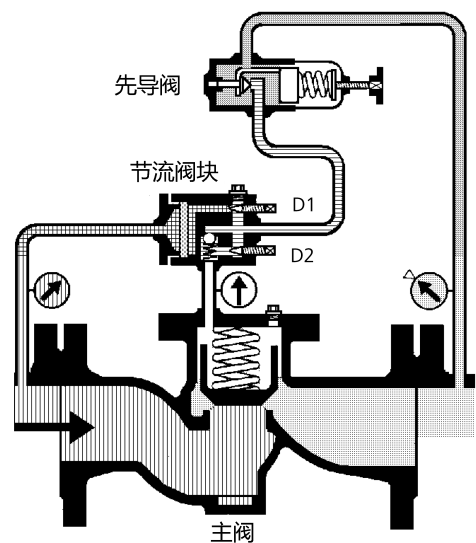

压力调节

减压阀 RP 810

大到超大流量的高压阀门



材料

材料			
温度		80 °C	130 °C
阀体	PN 16	球墨铸铁或铸钢	
	PN 160	铸钢	
	PN 16 - 160	不锈钢	
盖		钢，不锈钢	
内部元件		不锈钢	不锈钢
阀门密封		NBR	EPDM
O型圈		NBR	EPDM
先导阀，节流模块		不锈钢	不锈钢

尺寸·重量

尺寸[mm]							
公称压力 PN	尺寸	公称直径 DN					
		40	50	65	80	100	125
16	A*	200	230	290	310	350	400
40	A*	200	230	290	310	350	400
63 - 160	A*	260	300	340	380	430	
alle PN	B	200	220	250	260	280	290
alle PN	C	140	160	180	220	220	230


尺寸 [mm]							
公称压力 PN	尺寸	公称直径 DN					
		150	200	250	300	350	400
16	A*	480	600	730	850	980	1100
40	A*	480	600	730	850	980	
63 - 160	A*	550	650				
全部 PN	B	330	390	420	550	550	550
全部 PN	C	240	270	290	350	350	410

* 安装长度误差根据标准DIN EN 558

重量 [kg]													
公称压力 PN	公称直径 DN												
	40	50	65	80	100	125	150	200	250	300	350	400	
16	25	30	40	50	70	120	150	210	380	450	520	625	
40	33	38	48	65	80	140	160	240	440	510	580		
63 - 160	40	45	55	80	110		165	290					

税务编号


84811019

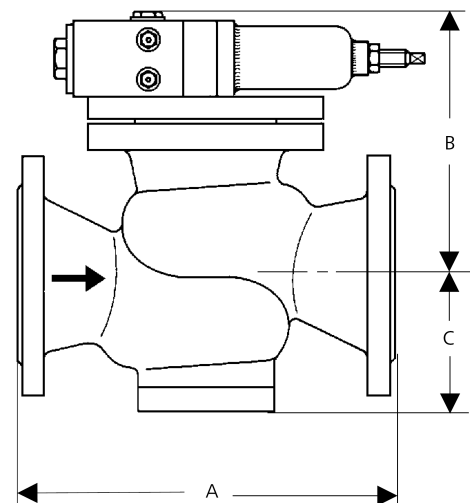

安装示意图

- | | |
|-------|--------------|
| 1 除尘器 | 4 安全阀 |
| 2 截止阀 | 5 压力表 |
| 3 减压阀 | 6 控制管路 G 1/2 |

控制管接于阀前和阀后十倍管径处

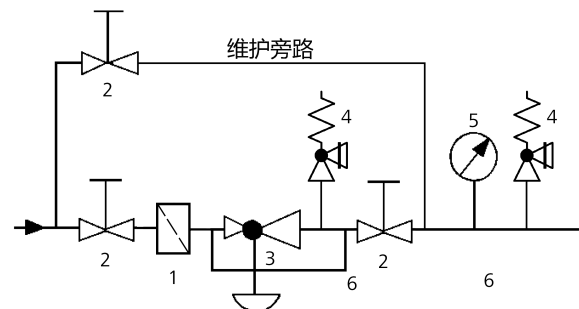

请务必重视说明书、专业知识和安全提示。所有压力数据均为表压。保留技术上的变更权。

Mankenberg GmbH
Sprenglerstrasse 99
D-23556 Luebeck | Germany

Phone: +49 (0) 451-8 79 75 0
Fax: +49 (0) 451-8 79 75 99

info@mankenberg.de
www.mankenberg.com



RP 810-2.X.23.1 Issue 15.09.2023

Page 6 of 6