

Uniwat®



Concentric Butterfly Valves

www.comeval.es



CONTENTS

General Design Considerations	4
Codification	5
Design Attributes	6
Main Features	7
Main Duties / Limits of use	7
Options	7
Flow Coefficients Kv Values	8
Valve Torques	8
SERIES VF700 DN25-600	9
Main Parts and Materials	9
Main Valve Parameters	10
Solutions on Control Accesories and Actuation	11

General Design Considerations



A butterfly valve is a type of flow control device, typically used to regulate a fluid flowing through a section of pipe. A flat circular plate (disc) is positioned in the centre of the pipe. The plate has a rod (shaft) through it connected to an actuator on the outside of the valve. Rotating the actuator turns the plate either parallel or perpendicular to the flow. Unlike a ball valve, the plate is always present within the flow, therefore a pressure drop is always induced in the flow regardless of valve position.

A butterfly valve is from a family of valves called quarter turn valves. The “butterfly” is a metal disc mounted on a rod. When the valve is closed, the disc is turned so that it completely blocks off the passageway. When the valve is fully open, the disc is rotated a quarter turn so that it allows unrestricted passage. The valve may also be opened incrementally to regulate flow thanks to the gradual interlocking notch.

Butterfly valves are of simple design, of light weight and volume and very effective on isolating lines for its quick and safe operation. Most of butterfly valves design are flangeless for installation between counter flanges what saves space, costs and maintenance.

There are two kind of flangeless butterfly valves:

Wafer Style Concentric Butterfly Valves: Wafer style is the more common one and is the least expensive one. The Wafer Style Concentric Butterfly valve is just about the standard. It is so common that no one even bothers to use the word “wafer” when ordering a butterfly valve. They take it for granted that if they order a butterfly valve, they will get a wafer style one. Wafer butterfly valves are installed between two flanges using bolts or studs and nuts. This type of installation, of course, makes it impossible to disconnect just one side of the piping system from the valve. That is where the lug style valve comes in.

Lug Style Butterfly Valves: Lug style valves are provided with tapered holes to fix threaded bolts in. This allows them to be installed into a system using two sets of bolts and no nuts. The valve is installed between two flanges using a separate set of bolts for each flange. This set-up permits either side of the piping system to be disconnected without distributing the other side.

Lug Style Butterfly Valves are used in dead end service and generally have a reduced pressure rating.

Valves can also be of dual flanged design; provided with integral flanges that are ready to be installed between flanges of the same standard. These are more bulky valves and usually required for large sizes and other styles of performance by the position of the shaft. (see next paragraph).

Other kind of valves by its nature of shaft design are as follows:

Concentric Design: This is the most common and simple design. The valve shaft is concentric to the disc. It is normally a resilient seated valve. Rotating the handle turns the plate either parallel or perpendicular to the flow of water, shutting off the flow

Double Eccentric Design: This design features a slight offset in the way the disc is positioned, which increases the valve's sealing ability and decreases its tendency to wear. It is normally used for throttling functions, larger sizes and / or metal seated valves.

Triple Offset Design: This design is the one offering the highest degree of performance. The shaft is totally off set from the central axis thus increasing the ability of the valve disc to close tightly at even high pressure. These valves are usually metal seated thus being used for high temperature too. These valves are usually operated by worm gear to achieve a slow closing.

Codification

Butterfly valve with body material JL1040 (GG25)

V F 7 0 0 P G E 0 0 0 0 5 0

VF : UNIWAT® butterfly valve identification

BUTTERFLY TYPE

790 Concentric Double flange type

ACTUATION DEVICE

P With lever
R With worm gear
B Bare shaft
E Electric actuator

DISC

G Ductile iron JS1030 (GGG40)
I St. Steel CF8M (AISI 316)
B AL-BZ
F Coated FEP
P Coated PFA
U St. Steel 904L

SEAT

E EPDM
N NBR
V Viton
S Silicon
T PTFE
F FEP
P PFA
H Hypalon

SPECIAL CONNECTION

00 No special connection
16 PN16 for valves >DN300

Only connection, no design

VALVE SIZE

050 DN50
300 DN300

Butterfly valve with other body material

V F 7 0 0 P G G N 0 0 0 5 0

VF : UNIWAT® butterfly valve identification

BUTTERFLY TYPE

790 Concentric Double flange type

ACTUATION DEVICE

P With lever
R With worm gear
B Bare shaft
E Electric actuator

BODY

G Ductile iron JS1030 (GGG40)
A Carbon Steel WCB
I St. Steel CF8M (AISI 316)
B AL-BZ
U St. Steel 904L

DISC

G Ductile iron JS1030 (GGG40)
I St. Steel CF8M (AISI 316)
B AL-BZ
F Coated FEP
P Coated PFA
U St. Steel 904L

SEAT

E EPDM
N NBR
V Viton
S Silicon
T PTFE
F FEP
P PFA
H Hypalon

SPECIAL CONNECTION AND DESIGN


00 No special connection
16 PN16 for valves >DN300

VALVE SIZE

050 DN50
300 DN300

Design Attributes

Concentric Butterfly Valves are quarter turn rotary valves, bidirectional, with rubber or fluoropolymer seat, for stopping or regulating the flow of the service fluid when necessary. A metal disc is positioned in the centre of the valve. The plate has a rod (stem) through it connected to an actuator device (handwheel, gear, etc.) on the outside of the valve. The valve closes by turning the disc clockwise and is open when the lever is parallel to the pipe. Valves are provided with epoxy paint against environmental aggression. They are of simple design, light weight and volume and offer a quick operation with full seat tightness, being widely used in many applications with significant savings in space and investment costs for installation.

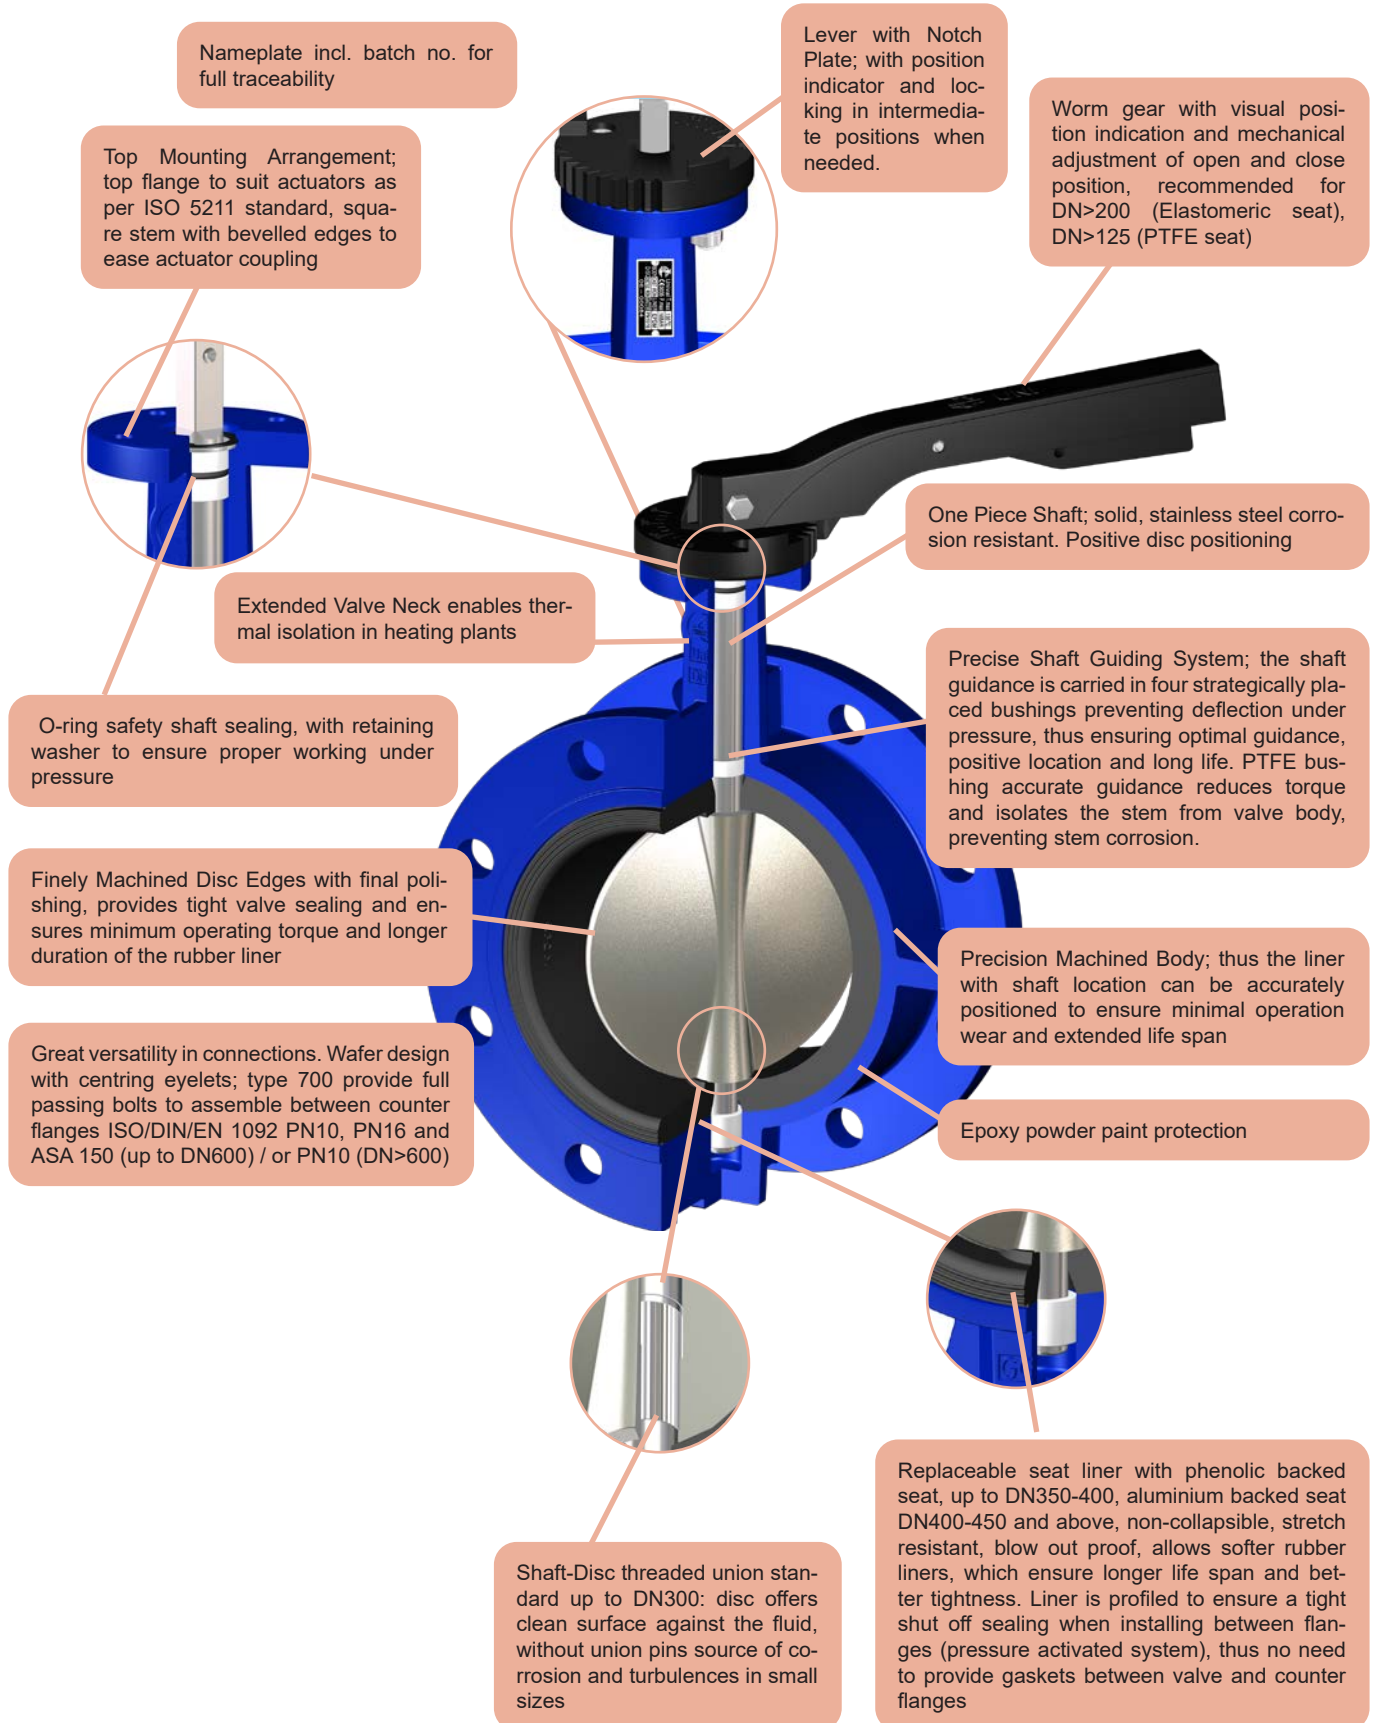

SERIES VF790

Main Features

Valve design: EN 593, EN 12516 & DIN 3840.

Nominal Pressure: PN16 (DN25-DN300)/ PN10* (DN350-1200). For PTFE seat PN10 (DN40-600)

* Option PN16 (DN350-1200)

Face to face length: EN 558 S13 (DIN 3202 F16) SERIES VF790

Valve end connections:

-VF790 Flanged to EN 1092-1/2 type 11/B

PN16 (DN50-300); PN10 (DN350-1200)

Top flange: ISO 5211

Marking: EN 19

Pressure Tests: EN 12266-1

Seat leakage rate: Rate A (full seat tightness in both directions)

Outside epoxy coating protection blue color similar to RAL5002. Min. average thickness 250 microns

Product compliant with Directive 2014/68/EU on Pressure Equipment (PED) and Machinery Directive 2006/42/EC

Main Duties / Limits of use

Liquids compatible with materials of construction, acc. to Directive 2014/68/EU, Annex II table 8 (liquids of group 1*) & table 9 (liquids of group 2*) up to category I

Low pressure steam & neutral gases of group 2*, acc. to Directive 2014/68/EU, Annex II table 7 up to category I

Table 7: PS 16 bar DN25-200 (Art.4-Parr.3 DN25-50)

PS 13 bar DN250

PS 10 bar DN300-350

PS 6 bar DN400-500

PS 2,5 bar DN600-1200

Table 8: PS 16 bar DN25-125 (Art.4-Parr.3)

PS 13 bar DN150

PS 10 bar DN200-1200 (Art.4-Parr.3 DN200)

Table 9: PS 16 bar DN25-300 (Art.4-Parr.3)


- Option DN350-1200

PS 10 bar DN350-1200 (Art.4-Parr.3)

Questions referring to chemical resistance, please consult us

Observe also pressure/temperature limits on diagrams under

*Classification of fluids (group 1 or 2) acc. to Directive 2014/68/EU, Article 13

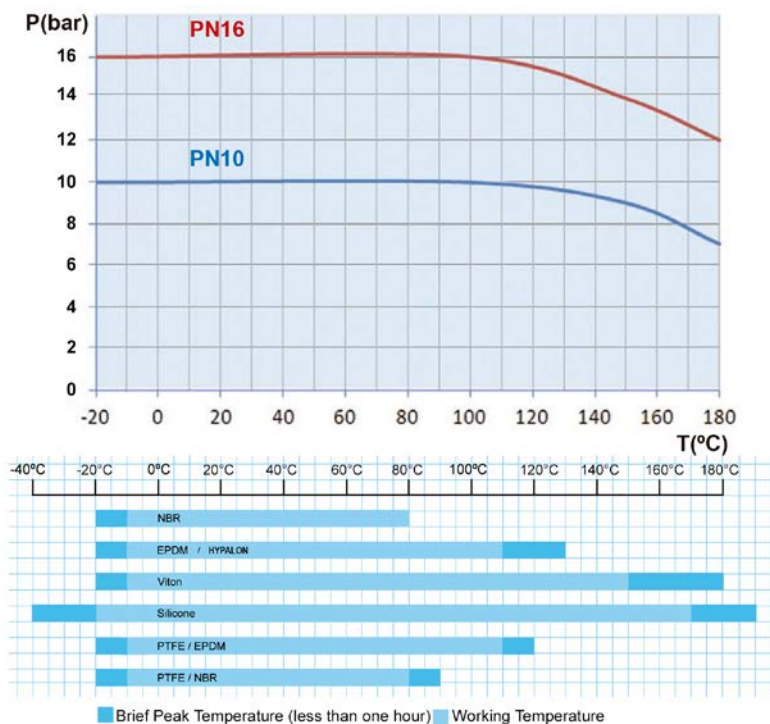

We recommend not to exceed maximum velocity as follows:

PN10: 3 m/s

PN16: 4 m/s

TSmax: 80°C for drinking water

Temperature ranges given just for reference.

Pressure-temperature rating, material compatibility and other parameters also to be considered for rubber selection.

Please consult our Technical Department for a particular application.

Options

Compliance with EN 1074-1/2, higher service pressure ratings and temperatures, other connections, other designs and approvals, limit switches, different actuation. Please consult us

SERIES VF790

Flow Coefficients Kv Values (m³/h)

DN	Opening Angle of the Valve								
	10°	20°	30°	40°	50°	60°	70°	80°	90°
50	-	2,5	7	14	24	40	64	95	105
65	-	5	11	23	40	67	107	159	176
80	-	9	20	35	61	101	161	240	265
100	-	16	38	78	137	226	360	538	594
125	0,5	26	69	129	219	361	576	860	950
150	0,8	44	105	205	373	617	983	1468	1622
200	1,3	82	205	387	680	1124	1792	2676	2957
250	2,1	138	345	669	1084	1791	2855	4262	4711
300	3,7	210	534	1028	1639	2707	4318	6449	7126
350	5,5	305	750	1326	2347	3878	6184	9236	10205
400	7,4	388	935	1813	3208	5301	8454	12625	13950
450	9,7	550	1212	2370	4193	6929	11049	16500	18232
500	13	658	1595	2981	5275	8716	13900	20758	22937
600	20	962	2246	4431	7919	13083	20864	31158	34429
700	55	1233	2725	5105	9022	14906	23770	35499	39225
800	135	1719	3394	6367	10338	17081	27239	40905	44950
900	180	2475	4731	8631	13691	22620	36072	54165	59525
1000	250	3342	6443	11752	18642	30800	49116	73755	81050
1200	320	4715	8643	15155	24198	39980	63757	95741	105210

A valve flow coefficient represents the standard flow rate which flows through the valve at a given opening, referred to pre-established conditions:

* Kv value is the volume of water at 20°C, in cubic meters per hour (m³/h), that will flow through the valve at a static pressure drop of 1 bar across the valve.

* Cv value is the volume of water at 60°F, in gallons per minute (gpm), that will flow through the valve at a static pressure drop of 1 psi across the valve.

Conversion from Kv to Cv can be roughly calculated by means of the following expression:

$$Cv = Kv \times 1,17$$

Flow rate through the valve with other liquids can be calculated with the following expressions (for gases please consult us):

$$Kv = q (SG / dp)^{1/2} \text{ where}$$

q = water flow (m³/h)

SG = specific gravity (1 for water)

dp = pressure drop (bar)

$$Cv = q (SG / dp)^{1/2} \text{ where}$$

q = water flow (US gallons per minute)

SG = specific gravity (1 for water)

dp = pressure drop (psi)

It is common practice to size the valves on the basis of pipe DN for on off application. Nevertheless, Butterfly Valves used for control purpose should be calculated on the basis of operating conditions.

First step is to calculate the Kv values for the different working conditions and then choose the DN with such Kv values in the region of 20° to 70° valve opening angle.

COMEVAL Technical Department is at your disposal to help you sizing your system.

Valve Torques (Nm)

DN	Elastomeric seat	
	PN10	PN16
50	40	45
65	45	50
80	54	60
100	63	70
125	72	80
150	85	95
200	135	150
250	180	200
300	540	600
350	675	750
400	1260	1400
450	1440	1600
500	1800	2000
600	2250	2500
700	3600	4000
800	4500	5000
900	5400	6000
1000	9900	11000
1200	16200	18000

Remarks for Actuator Sizing:

The torque values given are for water or other non-viscous lubricating liquids at ambient temperature.

Recommended safety factor to be applied:

30-40% for double acting pneumatic actuators

30-50% for single acting pneumatic actuators and electric actuators

There are several factors that can increase above given values and should be taken into account for actuators sizing:

-For gases and dry medium (non lubricating), multiply above values by about 1,25-2 depending on application

-For viscous liquids increase above values depending on the liquid properties

-For service conditions such as likelihood of seat swelling, or low and high temperature seat hardening, an additional safety factor should be considered.

There are three torques to be considered when selecting the proper actuator for a butterfly valve:

1) Seating Torque: The torque to displace a resilient seat and effect shutoff


2) Bearing Torque: The torque required to overcome friction forces on the valve shaft bearing surfaces during valve travel angle (about 30% of seating torque)

3) Dynamic Torque: Due to fluid forces which tend to close the valve when the valve is partially open. This torque is due to the velocity of the fluid created by a differential pressure across the valve. Systems should be projected to avoid high velocities across the valve

Above given values are inclusive of the 3 torques if max. recommended velocities are not exceeded, the actuator selected must provide the calculated torque over its total opening and closing travel angle.

SERIES VF790

Main Parts and Materials

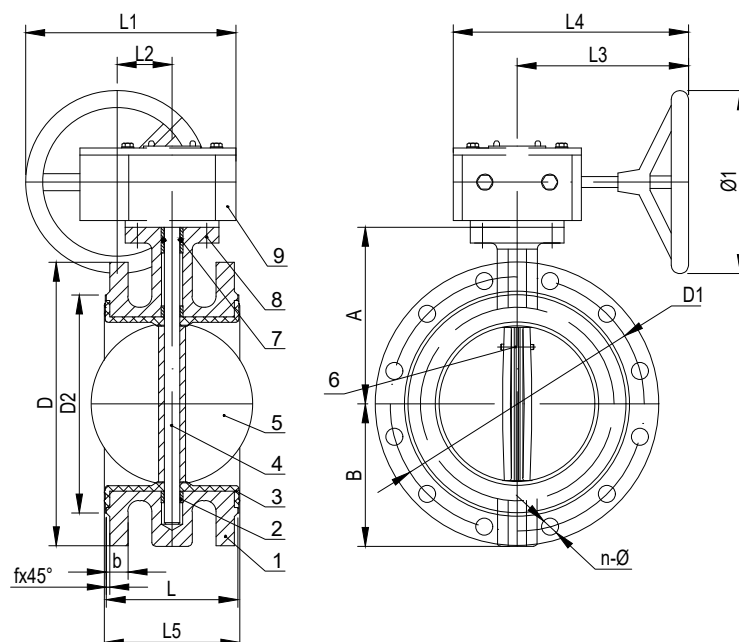

NO.	PART	MATERIAL
1	BODY	Ductile Iron EN-JS1030 (GGG40)
		St. Steel CF8M
		Steel WCB
2	DISC	Ductile Iron EN-JS1030 (GGG40) Ni Plated
		St. Steel CF8M
		Al-Bronze
3	LINER	NBR
		EPDM
		Viton
		Hypalon
4	STEM	PTFE
4	STEM	St. Steel AISI 420 (DN50-300) - AISI 431 (DN350-1200)
5	O-RING	NBR
5	O-RING	EPDM
6	BUSHING	BRONZE
7	BOLT & NUT	A2-70

SERIES VF790

Main Valve Parameters

SIZE	50	65	80	100	125	150	200	250	300
A	126	132	146	155	170	192	205	237	280
B	83	93	100	114	125	143	172	202	230
L	BODY	108	112	114	127	140	140	152	178
L5	SEAT	111	115	117	130	143	143	155	168
f		3	3	3	3	3	3	3	4
PN10	D	165	185	200	220	250	285	340	395
	D1	125	145	160	180	210	240	295	350
	D2	102	122	133	158	184	212	268	320
	n-ØC	4-19	4-19	8-19	8-19	8-19	8-23	8-23	12-23
	b	19	19	19	19	19	19	20	24.5
PN16	D	165	185	200	220	250	285	340	405
	D1	125	145	160	180	210	240	295	355
	D2	102	122	133	158	184	212	268	320
	n-ØC	4-19	4-19	8-19	8-19	8-19	8-23	12-23	12-28
	b	19	19	19	19	19	19	20	24.5
L1		172	172	172	172	172	172	289	310
L2		45	45	45	45	45	45	63	78
L3		173	173	173	173	173	173	237	225
L4		226	226	226	226	226	226	313	307
Ø1		150	150	150	150	150	150	300	300

SIZE	350	400	450	500	600	700	800	900	1000	1200
A	311	338	377	432	501	550	622	660	718	916
B	268	313	350	380	450	478	562	584	657	825
L	BODY	190	216	222	229	267	292	318	330	470
L5	SEAT	194	221	227	234	272	299	325	337	478
f		4	4	4	4	5	5	5	5	5
PN10	D	505	565	615	670	780	895	1015	1115	1455
	D1	460	515	565	620	725	840	950	1050	1380
	D2	430	482	532	585	685	800	905	1005	1330
	n-ØC	16-23	16-28	20-28	20-28	20-31	24-31	24-34	28-34	28-37
	b	24.5	24.5	25.5	26.5	30	32.5	35	37.5	45
PN16	D	520	580	640	715	840	910	1025	1125	1485
	D1	470	525	585	650	770	840	950	1050	1390
	D2	430	482	548	609	720	794	901	1001	1328
	n-ØC	16-28	16-31	20-31	20-34	20-37	24-37	24-40	28-40	28-43
	b	26.5	28	30	31.5	36	39.5	43	46.5	57
L1		310	434	434	434	531	574	574	638	777
L2		78	181	181	181	200	228	228	243	302
L3		225	94	94	94	125	140	140	162	236
L4		307	357	357	357	432	501	501	547	656
Ø1		300	300	300	300	400	400	400	450	450

Dimensions in mm subject to manufacturing tolerance / Weights in kg

Solutions on Control Accessories and Actuation

UNIWAT butterfly valves can be provided with a wide range of solutions on control accessories and actuation which is all packaged at our works according to customer specifications. The modular system permits to distributors and plant users to assemble or replace the diverse options in site. Virtually most applications that may be encountered on the industry today are covered with the standard range of actuation and accessories, nevertheless, other customer tailored solutions can be provided by our R&D Section.

Position Indication Arrangements on Manual Valves

Special designs of proven reliability have been engineered by our R&D section to provide UNIVAL users with more service options.



Valve with hand lever with electromechanical limit switches



Valve with hand lever with inductive proximity limit switches



Valve with worm gear with electromechanical limit switches



Valve with worm gear with inductive proximity limit switches



Valve with hand lever with limit switches box (metal or plastic)



Valve with worm gear with limit switches box (metal or plastic)



Other options



Stem extensions



Pad Locked lever

Stem Extensions; either for manual operated valves or actuated ones. The length of extension is made to the customer specification, and provides bolting arrangement on both sides: valve stem and actuator stem side with upper part according to ISO 5211 standard.

Pad Locked lever; this simple system prevents unauthorized operation at the plant. It is arranged on request.

Pneumatic Actuators CMVL T Series - Options and Accesories

Valve position indication can be provided by some arrangements such as Limit Switches that can be mounted either onto the actuator shell or cased into plastic or metal boxes.



Inductive proximity limit switches




Metal or plastic limit switches boxes

Solenoid Valves in diverse materials and configurations can be provided as the most common accessories on pneumatic actuators. For throttling services a range of standard or smart Positionners can be adapted onto the actuators. Intermediate Gear Boxes can be fitted in all cases for emergency manual actuation.



Solenoid Valves for On/Off control

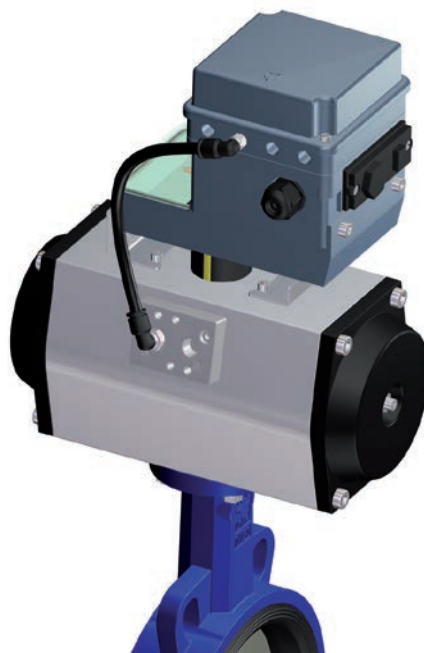

Pneumatic or Electropneumatic,
Standard or Intelligent Positionners




Intermediate Gear Box for
emergency manual actuation

Marketing Tools Available to Distributors

A rich assortment of Uniwat® marketing tools are available to our distributors worldwide, visit our corporate Web site www.comeval.es for more details.




Data Sheets Manual
Comprehensive of all technical and engineering information on the comprehensive portfolio.

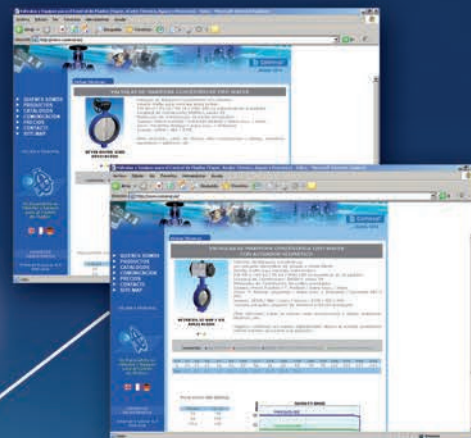

Web Site Product Sheet
Valve description, main dimensions, operating parameters and other links accessible at your finger tips.

Arrangement Drawings

Standardized sectional parts and dimensional drawings for use on engineering projects or enquiries.

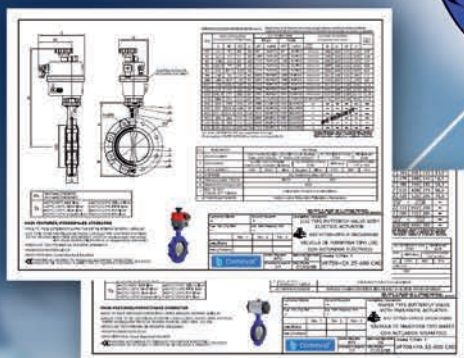

Cut way / Demo Samples



Price Lists


Up dated price book comprehensive of all models including actuated valves.

Join us on the net to start your Uniwat® experience
www.comeval.es



Operating and Maintenance Manuals

Provided along every valve into the sealed plastic bag. Also accessible via Internet at all times



Traceability

Valves are provided with a riveted name plate ensuring traceability, year of manufacture and main parameters. Valves are individually preserved into a sealed air bubble plastic bag and then on sets of some number of valves per cardboard box to assist with handling and storing. Please ask your Uniwat® distributor for packaging details. (no minimum order requirement is imposed).

Excelling the best.

Uniwat®



www.comeval.es