

193001 STANDARD SEALS – ISO 228 F



TWO-way ball valve

Drive: ISO 5211 – DIN 3337 foration for actuator

Connection: ISO 228 female/female thread

Flow: Full

Material: Aisi 316L (1.4404)

Measure: from 1/4" to 1"

Seals: Modified Virgin P.T.F.E.

Operating temperature: -20°C+170°C

Outer finish: Glazed

Screws for mounting actuator included

On request:

Antistatic device ATEX:

II 2G Ex h IIC T4 Gb


II 2D Ex h IIIC T135°C Db

M.O.C.A. CE 1935/2004


• Seals made of:

PTFE with glass -20°C+170°C

PTFE with inox -20°C+200°C

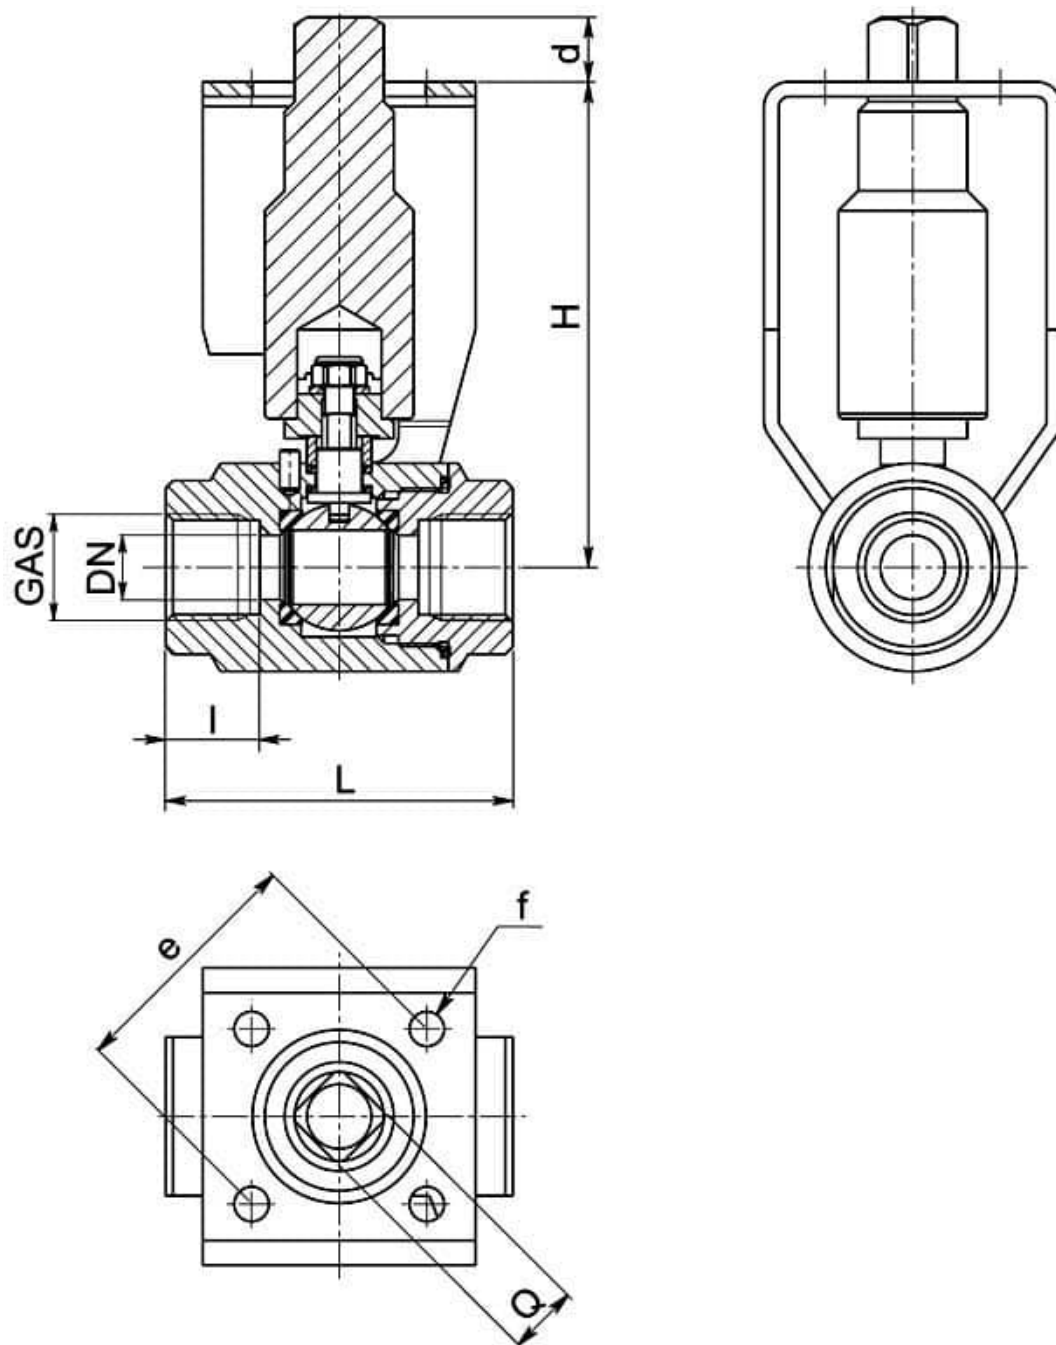

G	DN	L	I	H	d	ISO	□	e	f	Nm	PN	Kg	COD. AISI 316L
1/4"	10	60	17	90	10	F.05	9	50	7	7	200	-	193001 60410
3/8"	10	60	17	90	10	F.05	9	50	7	7	200	-	193001 60810
1/2"	15	70	19	98	10	F.05	9	25	7	10	200	-	193001 61410
3/4"	20	80	20	105	10	F.05	9	50	7	15	160	-	193001 62010
1"	25	90	22	111	10	F.05	9	50	7	18	160	-	193001 62610

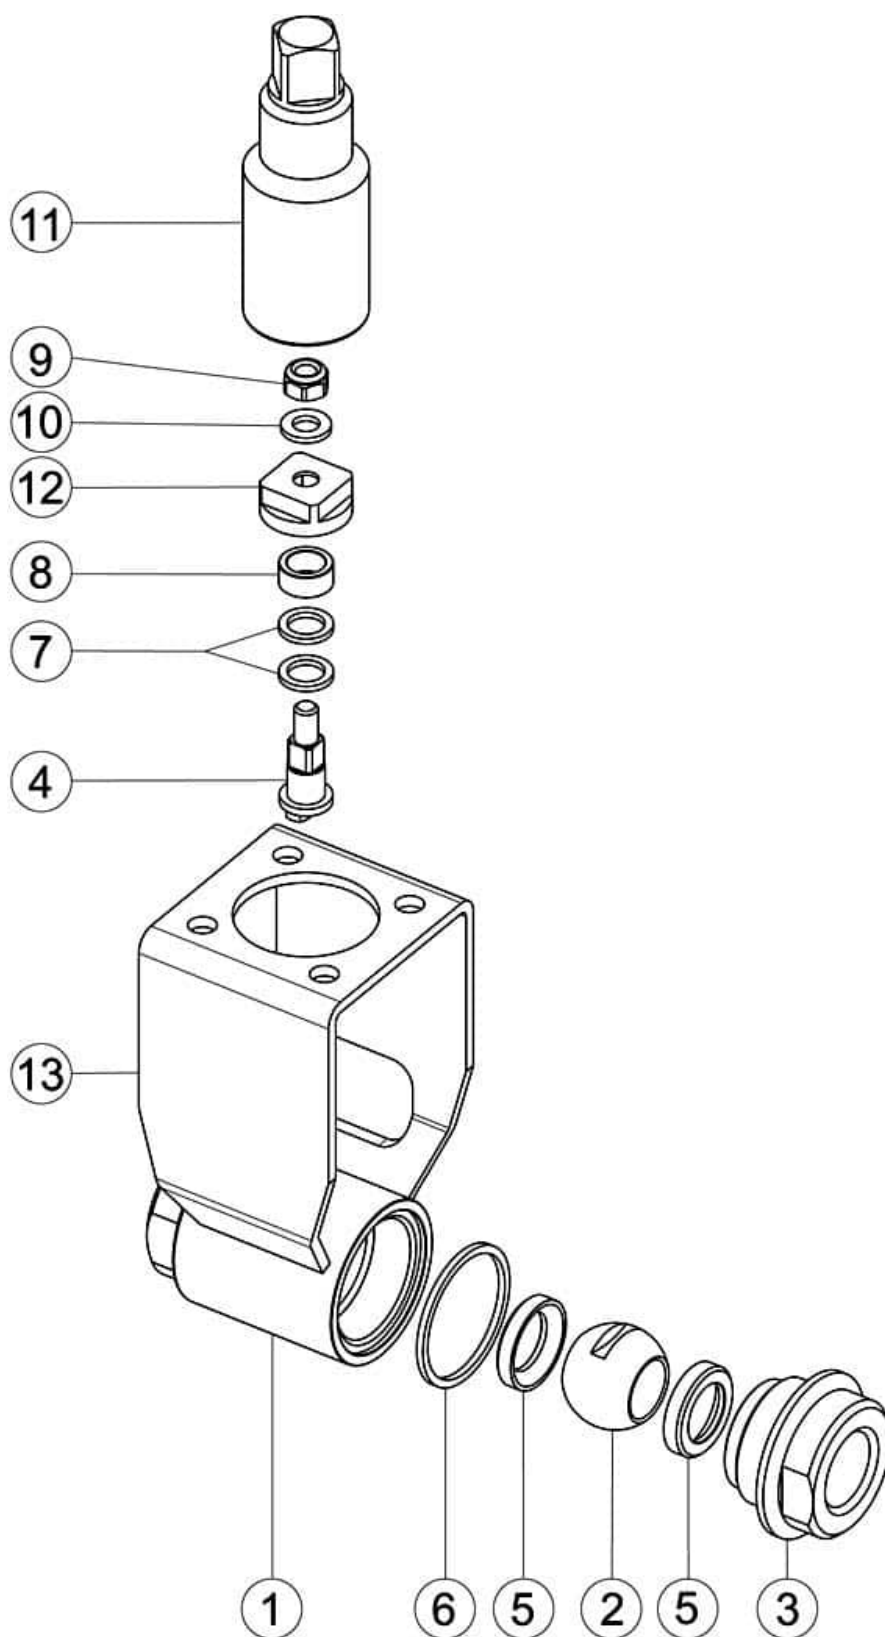

POS.	Denom.	PCS	MAT.
------	--------	-----	------

1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeve	1	AISI 316L
4	Stem	1	AISI 316L
5	Ball Seals	2	PTFE
6	Sleeve Seal	1	PTFE
7	Pin Seals	2	PTFE
8	Distanziale	1	OT-58 nichelato
9	Nut	1	AISI 304L
10	Washer	1	AISI 304L
11	Extension	1	AISI 303
12	Disco quadro	1	AISI 316L
13	Brackets	1	AISI 304L

