


273004_HIGH PRESSURE PN400



TWO-way ball valve ATEX II 2 G-D T4
Drive: ISO 5211 – DIN 3337 flange for actuator
Connection: NPT female/female thread
Flow: Full
Material: Aisi 316L (1.4404)
Measure: from 1/4" to 1"
Seals: **DEVLON**
Operating temperature: -20°C+125°C
Outer finish: Turned
Screws for mounting actuator included

On request:
M.O.C.A. CE 1935/2004
•MANUAL with LEVER
• Seals made of:
Delrin POM -20°+125°C

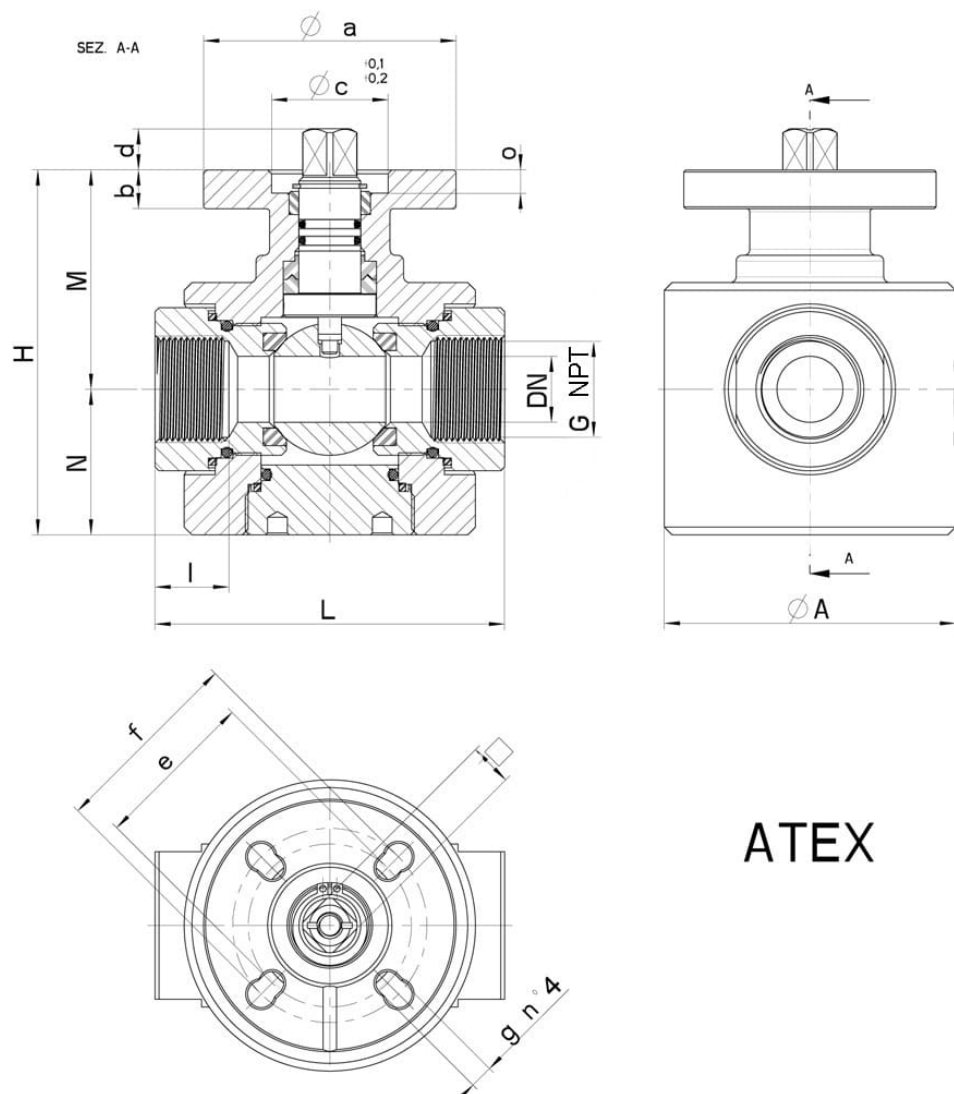

ATEX

G (NPT)	DN	L	I	H	M	N	Ø A	PN	Kg	ISO-DIN	Ø a	b	Ø c x Ø	□ Qu.	d	e	f	g	n° 4 BOLTS	Nm	CODE
1/4"	8	70	15	84	53	31	60	400	1,40	F.03 / F.04	55	10	25x6	9/11	9,5	36	42	6	M5x16	20	273004A604L0
3/8"	8	70	15	84	53	31	60	400	1,35	F.03 / F.04	55	10	25x6	9/11	9,5	36	42	6	M5x16/M6x16	20	273004A608L0
1/2"	12	80	18	87	54	33	65	400	1,70	F.04 / F.05	65	10	30x6	11/14	10,5	42	50	6	M5x16/M6x16	25	273004A614L0
3/4"	17	90	19	94	56,5	37,5	75	400	2,30	F.04 / F.05	65	10	30x6	11/14	10,5	42	50	6	M5x16/M6x16	35	273004A620L0
1"	22	100	20	100	59,5	40,5	85	400	3,2	F.04 / F.05	65	10	30x6	11/14	10,5	42	50	6	M5x16/M6x16	40	273004A626L0

You can't use multiple times the same shortcode.

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Sleeve	2	AISI 316L
3	Ball	1	AISI 316L
4	Stem	1	AISI 316L
5	Plug	1	AISI 316L
6	Pin Seals	1	PTFE caricato vetro - with glass
7	Pin Seals	1	PTFE
8	Pin Seals	1	PTFE
9	Plug Seal	1	PTFE
10	Sleeve Seal	2	PTFE
11	Ball Seals	2	DEVLON
12	Pin Seals	1	DEVLON
13	Pin Seals	1	DEVLON
14	O-Ring Pin	2	FKM
15	O-Ring Sleeve	2	FKM
16	O-Ring Plug	1	FKM
17	Seeger	1	AISI 420

