


760008

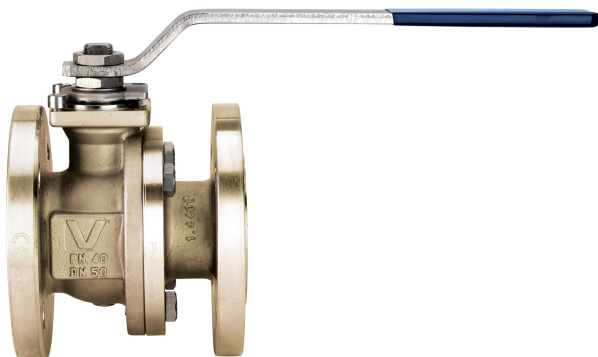

Flanged PN16 zinc-plated/painted (DN>100) carbon steel A216-WCB ball valve, full bore, EN 558 basic series 27 face to face dimension, Fire Safe, Antistatic Device.

A216-WCB, seats PTFE+fiberglass.

V-Ball option



V90

V60

V30-60



Low temperature design
-40°C

Technical specifications

