




764001 CARBON STEEL

Full bore Wafer-Split flanged ball valve PN16 with Antistatic Device and Fire Safe certificate, metric thread zinc-plated A105 carbon steel.

DN65/80/100 PN40 carbon steel.

V-Ball option





option V-PACK



Low temperature design
-40°C ON DEMAND

Technical specifications

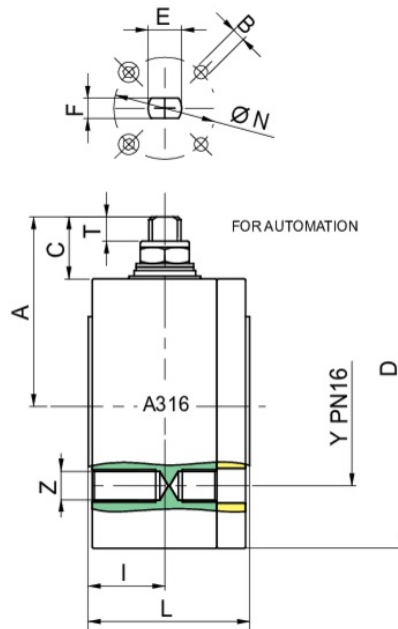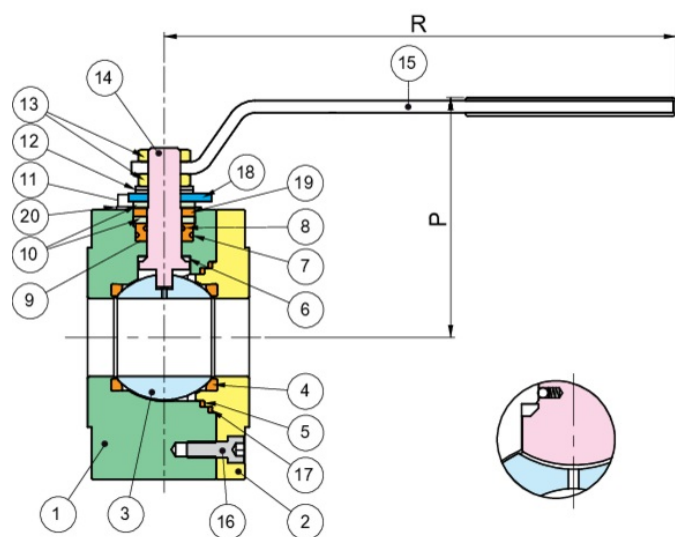

Carbon steel temperature range: -20° +160°

Vacuum: 10⁻³ torr.

POSITION	PART NAME	MATERIAL	N.º PIECES
1	BODY	ASTM A105	1
2	END CONNECTION	ASTM A105	1
3	BALL	A351-CF8/A479-TP304	1
4	BALL SEAT	PTFE	2
5	BODY SEAT	PTFE	1
6	THRUST WASHER	PTFE	1
7	O-RING	FKM	1
8	O-RING	FKM	1
9	STEM SEAT	PTFE	1
10	PACKING GLAND	A182-F316	2
11	SCREW	CARBON STEEL	2
12	SPRING WASHER	CARBON STEEL	2
13	NUT	CARBON STEEL	2
14	STEM	A479-TP304/17-4-PH	1
15	HANDLE	CARBON STEEL	1
16	SCREW	CARBON STEEL	3-4
17	BODY SEAT	GRAPHOIL	1
18	90° STOP	CARBON STEEL	1
19	STEM SEAL	GRAPHOIL	1
20	WASHER	STAINLESS STEEL	2

SIZE	DN	CODE	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	KV	PN	KG
1/2"	15	76400104	90	65	4xM12	22	53	131	69	52,5	19,5	8	M10	7	42-F04	M5	19,2	40	2,30
3/4"	20	76400105	95	75	4xM12	22	53	131	74	56	18	7,5	M10	7	42-F04	M5	35	40	2,45
1"	25	76400106	110	85	4xM12	24	57	174	92	72,5	25,5	10	M12	8	42-F04	M5	64,5	40	3,80
1"1/4	32	76400107	130	100	4xM16	30	65	174	97	76	23	8,5	M12	8	42-F04	M5	103,8	40	5,60
1"1/2	40	764001108	140	110	4xM16	37,5	79	250	118	93	31	11	M16	10	50-F05	M6	174	40	8,50
2"	50	76400110	150	125	4xM16	42	84	250	126	102	31	11,5	M16	14	50-F05	M6	301,3	40	10,00
2"1/2	65	76400112	180	145	4xM16	50,5	103	321	143	121	37,5	17	M20	14	70-F07	M8	545,7	16	17,50
3"	80	76400114	190	160	8xM16	61	122	381	153	132	42	18	M24	18	70-F07	M8	872,5	16	27,50
4"	100	76400118	220	180	8xM16	77,5	155	381	166	145,5	43	18	M24	18	102-F10	M10	1363,3	16	36,80

Certifications

SIL 3

SIL 3



TUV



FIRE-SAFE Acc. EN ISO
10497/API 607

F.E. TESTED
ISO15848-1

F.E. TESTED ISO15848-1