


303001_5" _T_4 SEALS STANDARD SEALS - ISO 228 F



THREE-way ball valve 4 seals with "T" port
Drive: ISO 5211 - DIN 3337 flange for actuator / Sliding lever / Lever
Connection: ISO 228 female/female/female thread
Flow: Full
Material: Aisi 304L (1.4307) - Aisi 316L (1.4404)
Measure: 5"
Seals: Virgin P.T.F.E.
Operating temperature: -20°C+160°C
Outer finish: Polished
Antistatic device ATEX:
II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T135°C Db

On request:
M.O.C.A. CE 1935/2004

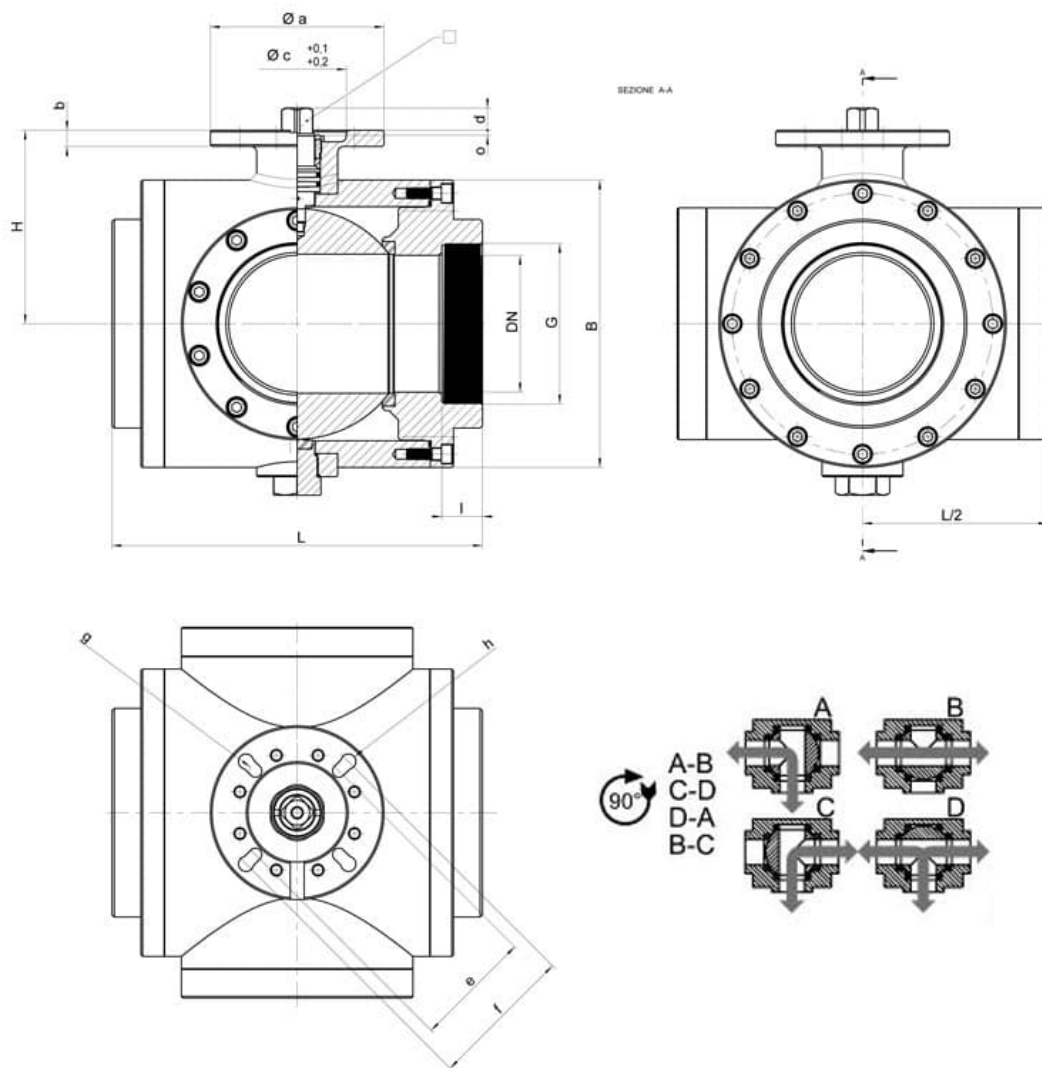

G (ISO 228)	DN	Ø B	L	I	H	PN	Kg.	ISO	Ø a	b	c x o	□	d	e	f	g	h	Nm	CODE AISI 304L	CODE AISI 316L
5"	120	250	320	35	167	16	77,7	F10 / F12	150	14	85 x 4	22	19	102	125	11	13	180*	303001A45810	303001A65810

