


313001_5" _L_4 SEALS SEALS STANDARD SEALS – ISO 228 F




THREE-way ball valve 4 seals with "L" port
Drive: ISO 5211 – DIN 3337 flange for actuator / Sliding lever / Lever
Connection: ISO 228 female/female/female thread
Flow: Full
Material: Aisi 304L (1.4307) – Aisi 316L (1.4404)
Measure: 5"
Seals: Virgin P.T.F.E.
Operating temperature: -20°C+160°C
Outer finish: Polished
Antistatic device ATEX:
II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T135°C Db

On request:
M.O.C.A. CE 1935/2004

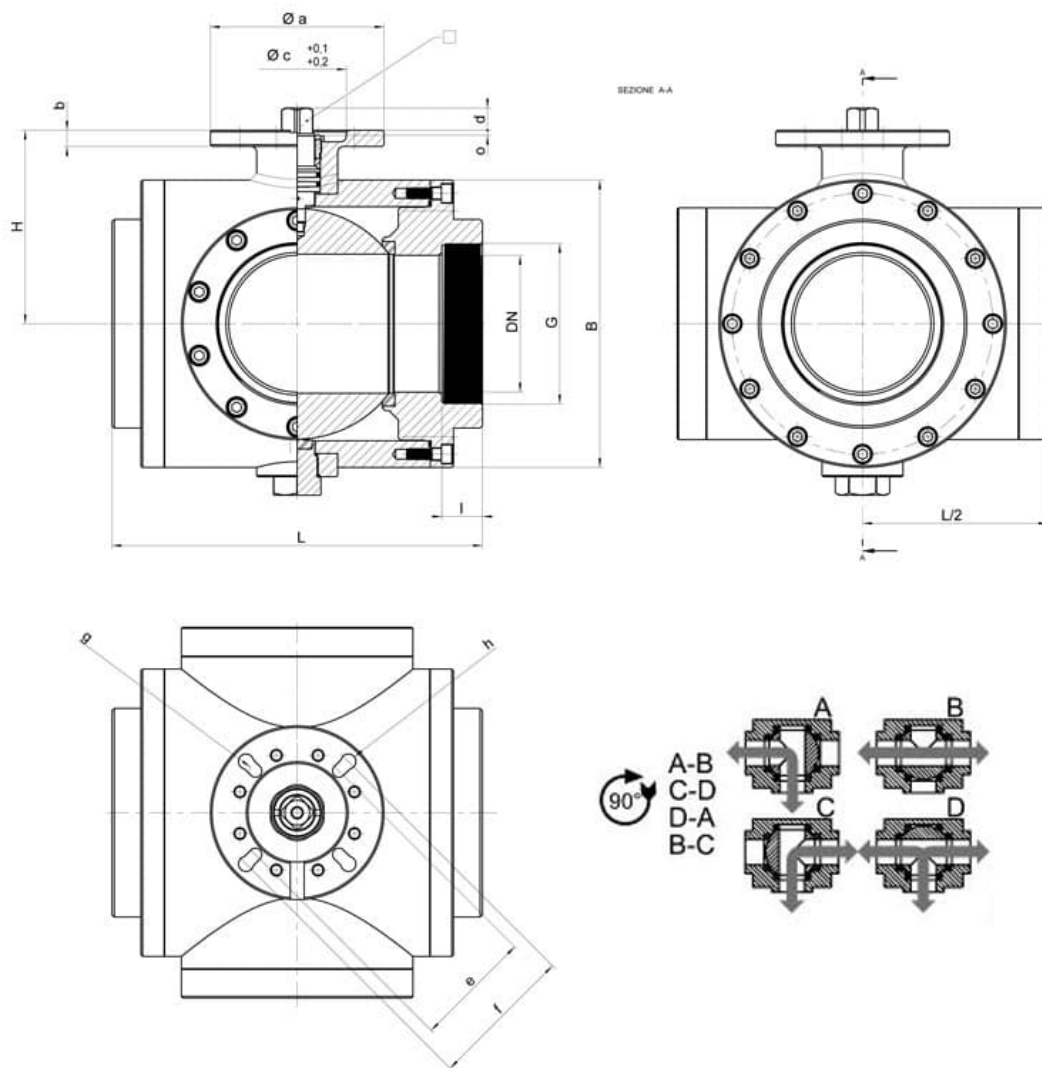

G (ISO 228)	DN	Ø B	L	I	H	PN	Kg.	ISO	Ø a	b	c x o	□	d	e	f	g	h	Nm	CODE AISI 304L	CODE AISI 316L
5"	120	250	320	35	167	16	79	F10 / F12	150	14	85 x 4	22	19	102	125	11	13	180*	313001A45810	313001A65810

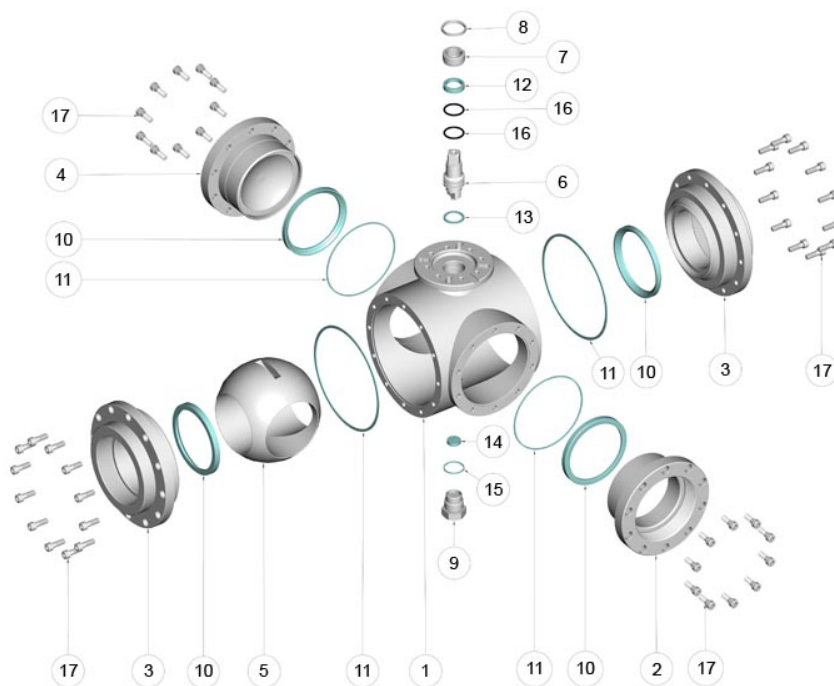

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 304L - 316L
2	Ball	1	AISI 304L - 316L
3	Sleeves	3	AISI 304L - 316L
4	Stem	1	AISI 304L - 316L
5	Ball Seals	4	PTFE Vergine Modificato
6	Sleeve Seals	3	PTFE
7	Stem Seal	1	PTFE
8	Stem Seal	1	PTFE
9	Stem or-Seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Locknut	1	AISI 303

