

313050_L_DN125 STANDARD SEALS_FLANGES UNI EN 1092-1



THREE-way ball valve 4 seals with "L" port

Drive: ISO 5211 - DIN 3337 flange for actuator / Sliding lever / Lever

Connection: Revolving threaded flanges and not UNI EN 1092-1:2003

Flow: Full

Material: Aisi 304L (1.4307) - Aisi 316L (1.4404)

Measure: 5"

Seals: Virgin P.T.F.E.

Operating temperature: -20°C+160°C

Outer finish: Polished

Antistatic device ATEX:

II 2G Ex h IIC T4 Gb


II 2D Ex h IIIC T135°C Db

On request:

M.O.C.A. CE 1935/2004



DN	A	L	H-H1-H2	C1-C2	Ø D	B	Ø R	Ø S	PN	Kg.	ISO	Ø a	b	c x o	□	d	Nm	CODE AISI 304L	CODE AISI 316L
125 per attuatore/for actuator	120	400	H=167	--	250	22	188	153	16	-	F10 / F12	150	14	85 x 4	22	19	180	313050A45810	313050A65810
125 con leva scorrevole/sliding lever (8)	120	400	H1=230	C1=670	250	22	188	153	16	-	F10 / F12	150	14	85 x 4	22	19	180	310450A45810	310450A65810
125 leva/lever (9)	120	400	H2=200	C2=500	250	22	188	153	16	-	F10 / F12	150	14	85 x 4	22	19	180	310150A45810	310150A65810

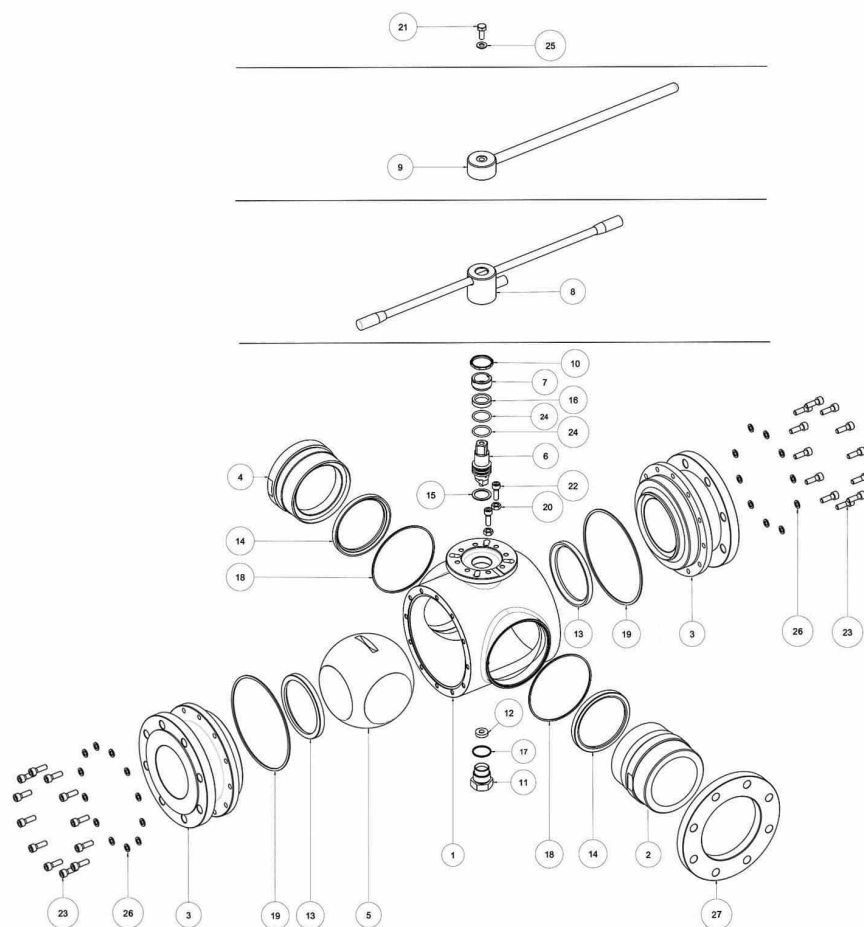

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 304L - 316L
2	Sleeve	1	AISI 304L - 316L
3	Sleeve	2	AISI 304L - 316L
4	Sleeve	1	AISI 304L - 316L
5	Ball	1	AISI 304L - 316L
6	Stem	1	AISI 304L - 316L
7	Register ring	1	AISI 304L - 316L
8	Sliding lever	1	AISI 304L - 316L
9	Fixed lever	1	AISI 304L - 316L
10	Locknut	1	AISI 304L - 316L
11	Thrust plug	1	AISI 304L - 316L
12	Thrust Seal	1	PTFE
13	Ball Seals	2	PTFE
14	Ball Seals	2	PTFE
15	Anti-friction Seal	1	PTFE
16	Stem Seal	1	PTFE
17	Thrust plug Seal	1	PTFE
18	Sleeve Seal	2	PTFE
19	Sleeve Seal	2	PTFE
20	Nut	2	AISI 304L - 316L

21	Lever screw	1	AISI 304L - 316L
22	Stop lever screw	2	AISI 304L - 316L
23	Sleeve screw	24	AISI 304L - 316L
24	Stem or-Seal	2	FKM
25	Lever screw washer	1	AISI 304L - 316L
26	Sleeve screw washer	24	AISI 304L - 316L
27	Flange	1	AISI 304L - 316L

