

373001_L_3 SEALS STANDARD SEALS - ISO 228 F



THREE-way ball valve three seals with "L" port
Drive: ISO 5211 - DIN 3337 flange for actuator
Connection: ISO 228 female/female/female thread
Flow: Full
Material: Aisi 304L (1.4307) - Aisi 316L (1.4404)
Measure: from 2"1/2 to 4"
Seals: Modified Virgin P.T.F.E.
Operating temperature: -20°C+170°C
Outer finish: Polished

On request:

Antistatic device ATEX:

II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db

M.O.C.A. CE 1935/2004



• Seals made of:

PTFE with glass -20°C+170°C


PTFE with carbographite -20°C+180°C

PTFE with inox -20°C+200°C

UHMW High-molecular weight polyethylene -20°C+80°C

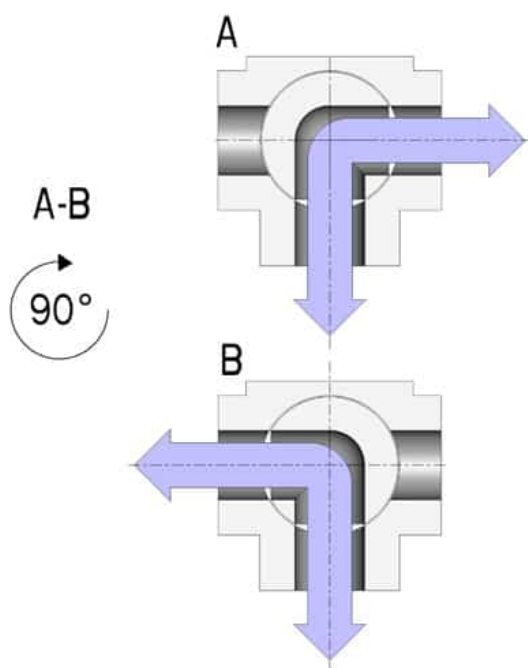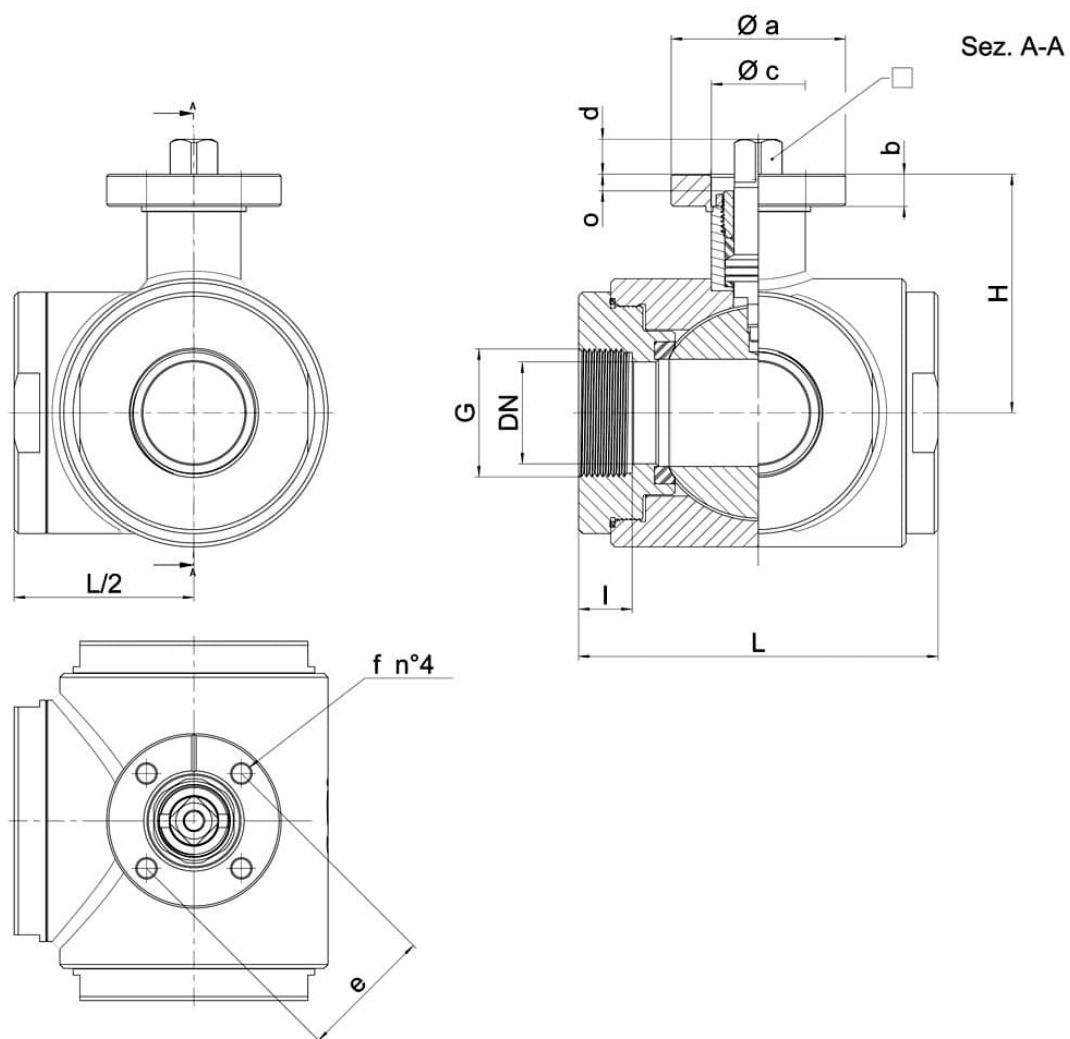

G	DN	L	I	H	PN	Kg	ISO-DIN	Ø a	b	Ø c x o	□	d	e	f	n° 4 BOLTS	Nm	CODE AISI 304L	CODE AISI 316L
2"1/2	65	160	22	101,5	16	8,88	F.07	90	12	55x4	17	15	70	9	M8x20	60	-	373001 64410
2"1/2	65	160	22	101,5	16	9,35	F.10	125	12	70x4	22	18	102	11	M10x25	60	-	373001 6441F
3"	80	200	26	116	16	17,10	F.07	90	12	55x4	17	15	70	9	M8x20	75	373001 44810	373001 64810
3"	80	200	26	116	16	17,50	F.10	125	12	70x4	22	18	102	11	M10x25	75	373001 4481F	373001 6481F
4"	100	240	26	131	10	27,10	F.07	90	12	55x4	17	15	70	9	M8x20	110	373001 45410	373001 65410
4"	100	240	26	131	10	27,60	F.10	125	12	70x4	22	18	102	11	M10x25	110	373001 4541F	373001 6541F

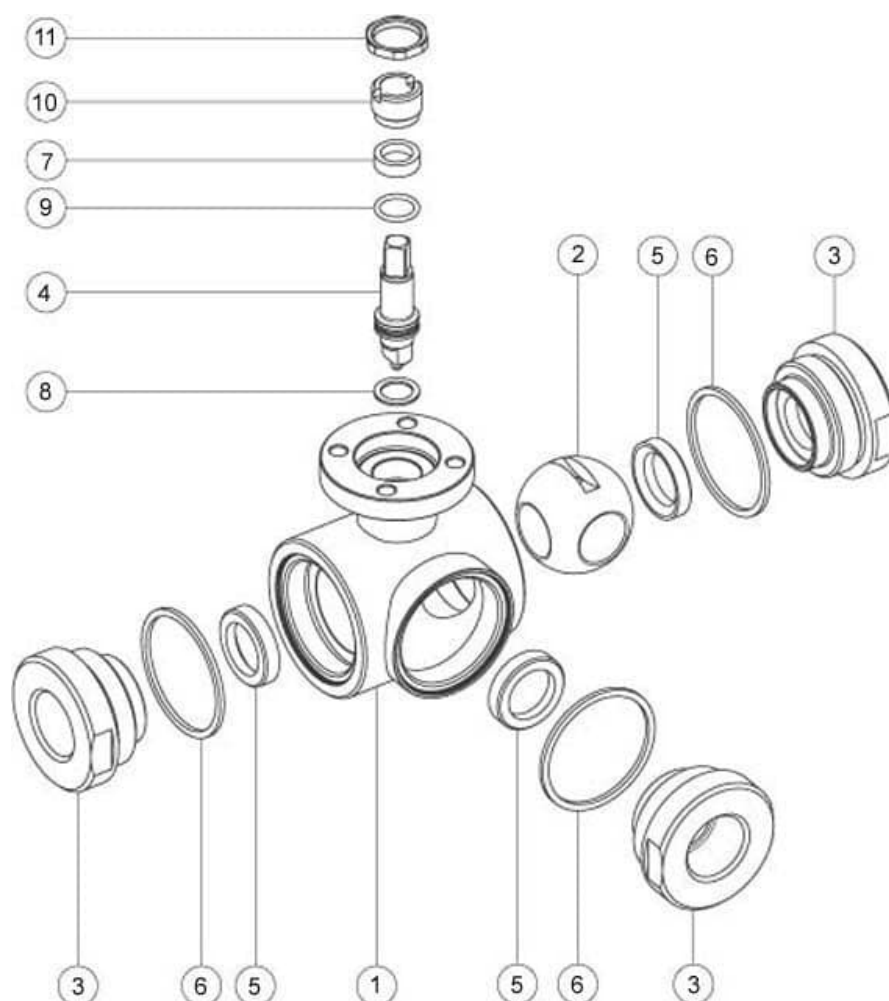

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeves	3	AISI 316L
4	Stem	1	AISI 316L
5	Ball Seals	3	PTFE
6	Sleeve Seals	3	NBR
7	Stem Seal	1	PTFE
8	Stem Seal	1	PTFE
9	Stem or-Seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Locknut	1	AISI 303

