



## LUG TYPE S62 - LEVER OPERATED

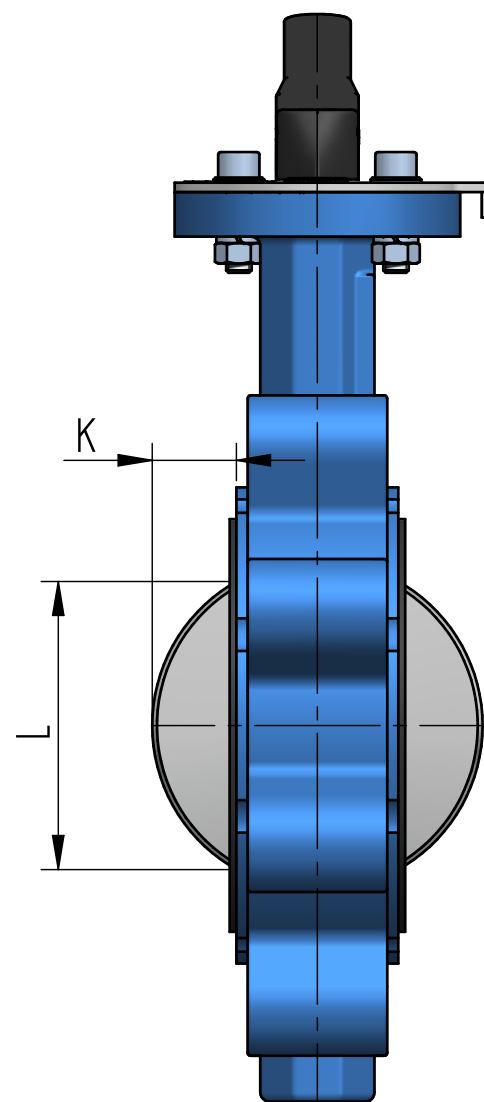


# LUG TYPE S62 - LEVER OPERATED DN40 - DN200

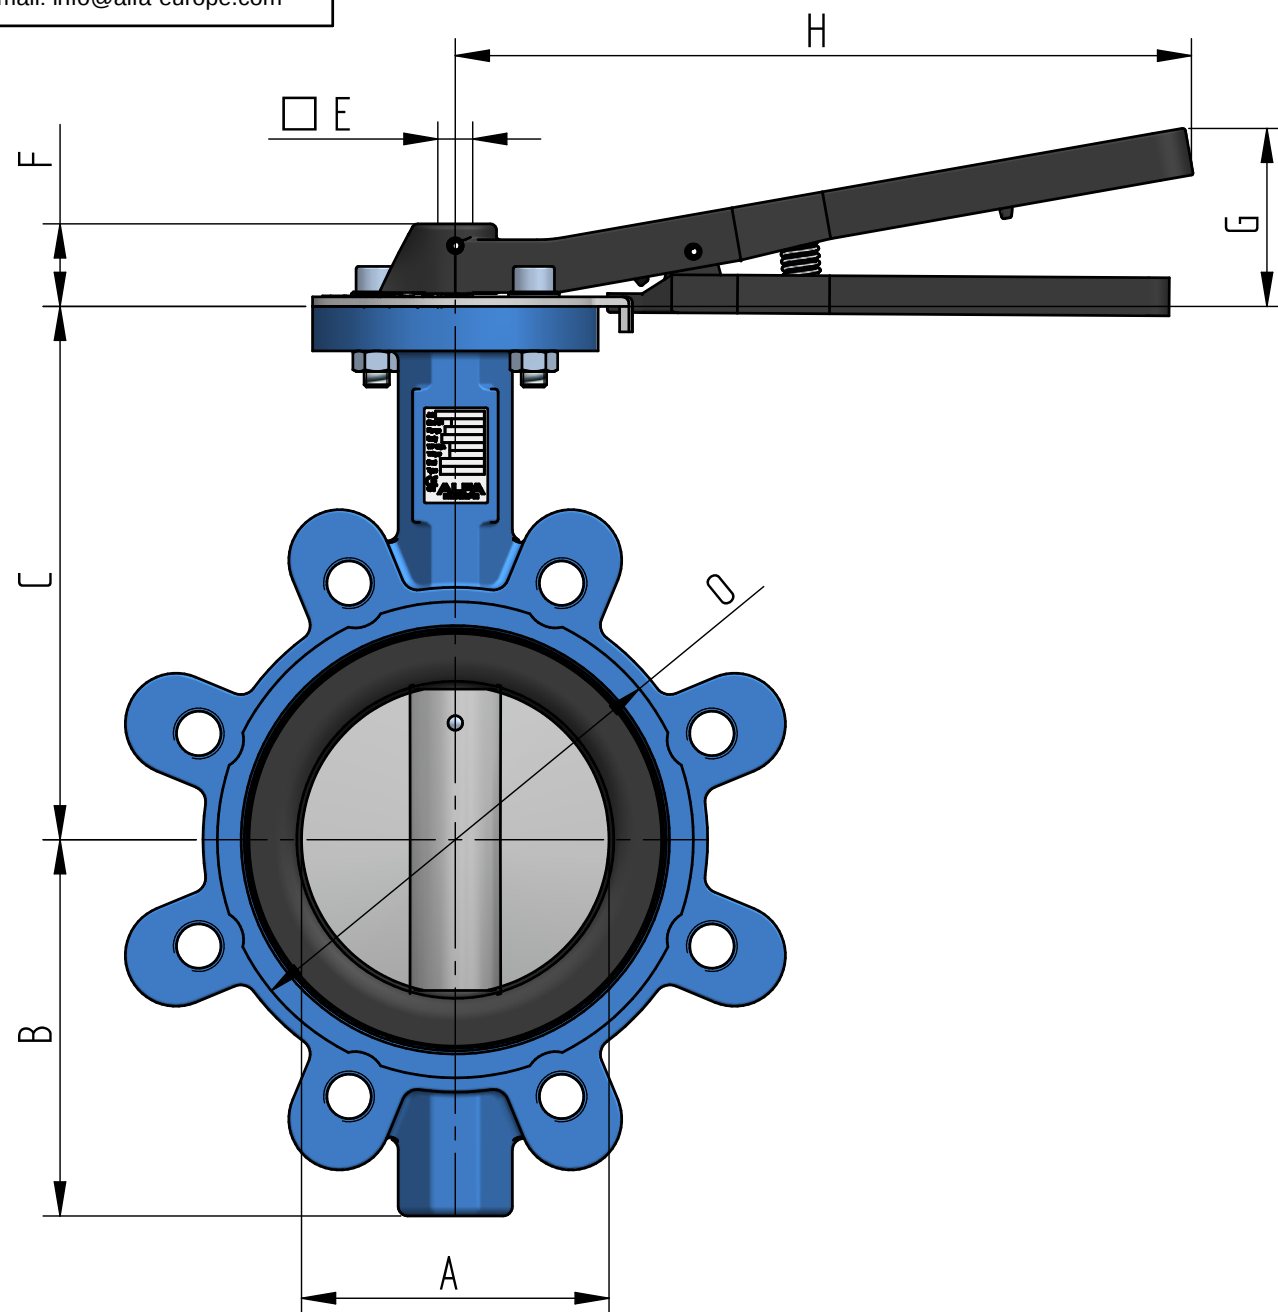

Size DN 40 to DN 200  
 Face to face acc. EN558.1 series 20  
 Flange connections: DIN PN6-10-16  
 ANSI B 16.5 Cl. 150#, JIS 5K, 10K  
 Temperature -40/+250°C  
 Various pressure ratings up to 16 bar  
 Top flange according ISO 5211

## Standard available materials :

| BODY        | DISC        | SHAFT    | SEAT                |
|-------------|-------------|----------|---------------------|
| EN-JS1030   | BS 1400 AB2 | SS 410   | NBR -15°C / +80°C   |
| A216 WCB    | EN-JS1030   | SS 416   | EPDM -23°C / +120°C |
| SS 14408    | SS 14408    | SS 14462 | --                  |
| BS 1400 AB2 | SD 2507     | SD F53   | --                  |

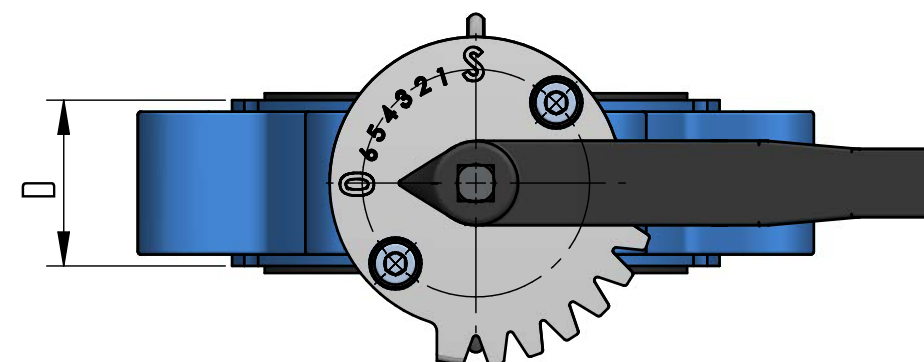

| Size   | A   | B     | C     | D    | E      | F  | G  | H   | K  | L   | O   | Weight ± Kg |
|--------|-----|-------|-------|------|--------|----|----|-----|----|-----|-----|-------------|
| DN 40  | 37  | 66    | 130   | 33   | [ ] 11 | 26 | 56 | 223 | 5  | 26  | 84  | 2.6         |
| DN 50  | 43  | 70    | 141   | 42   | [ ] 11 | 26 | 56 | 223 | -- | --  | 92  | 3.7         |
| DN 65  | 58  | 79    | 150.5 | 44.5 | [ ] 11 | 26 | 56 | 223 | 7  | 39  | 104 | 4.5         |
| DN 80  | 74  | 98.5  | 156.5 | 44.5 | [ ] 11 | 26 | 56 | 223 | 15 | 61  | 120 | 5.5         |
| DN 100 | 97  | 118.5 | 168   | 51   | [ ] 11 | 26 | 56 | 223 | 26 | 91  | 150 | 7.6         |
| DN 125 | 116 | 129.5 | 186.5 | 54.5 | [ ] 14 | 28 | 68 | 325 | 31 | 103 | 180 | 10.7        |
| DN 150 | 147 | 142   | 206   | 54.5 | [ ] 14 | 28 | 68 | 325 | 47 | 137 | 206 | 11.0        |
| DN 200 | 194 | 176   | 230.5 | 60   | [ ] 17 | 30 | 68 | 325 | 72 | 194 | 260 | 16.0        |