


PTFE LINED LUG TYPE S66 BARE SHAFT



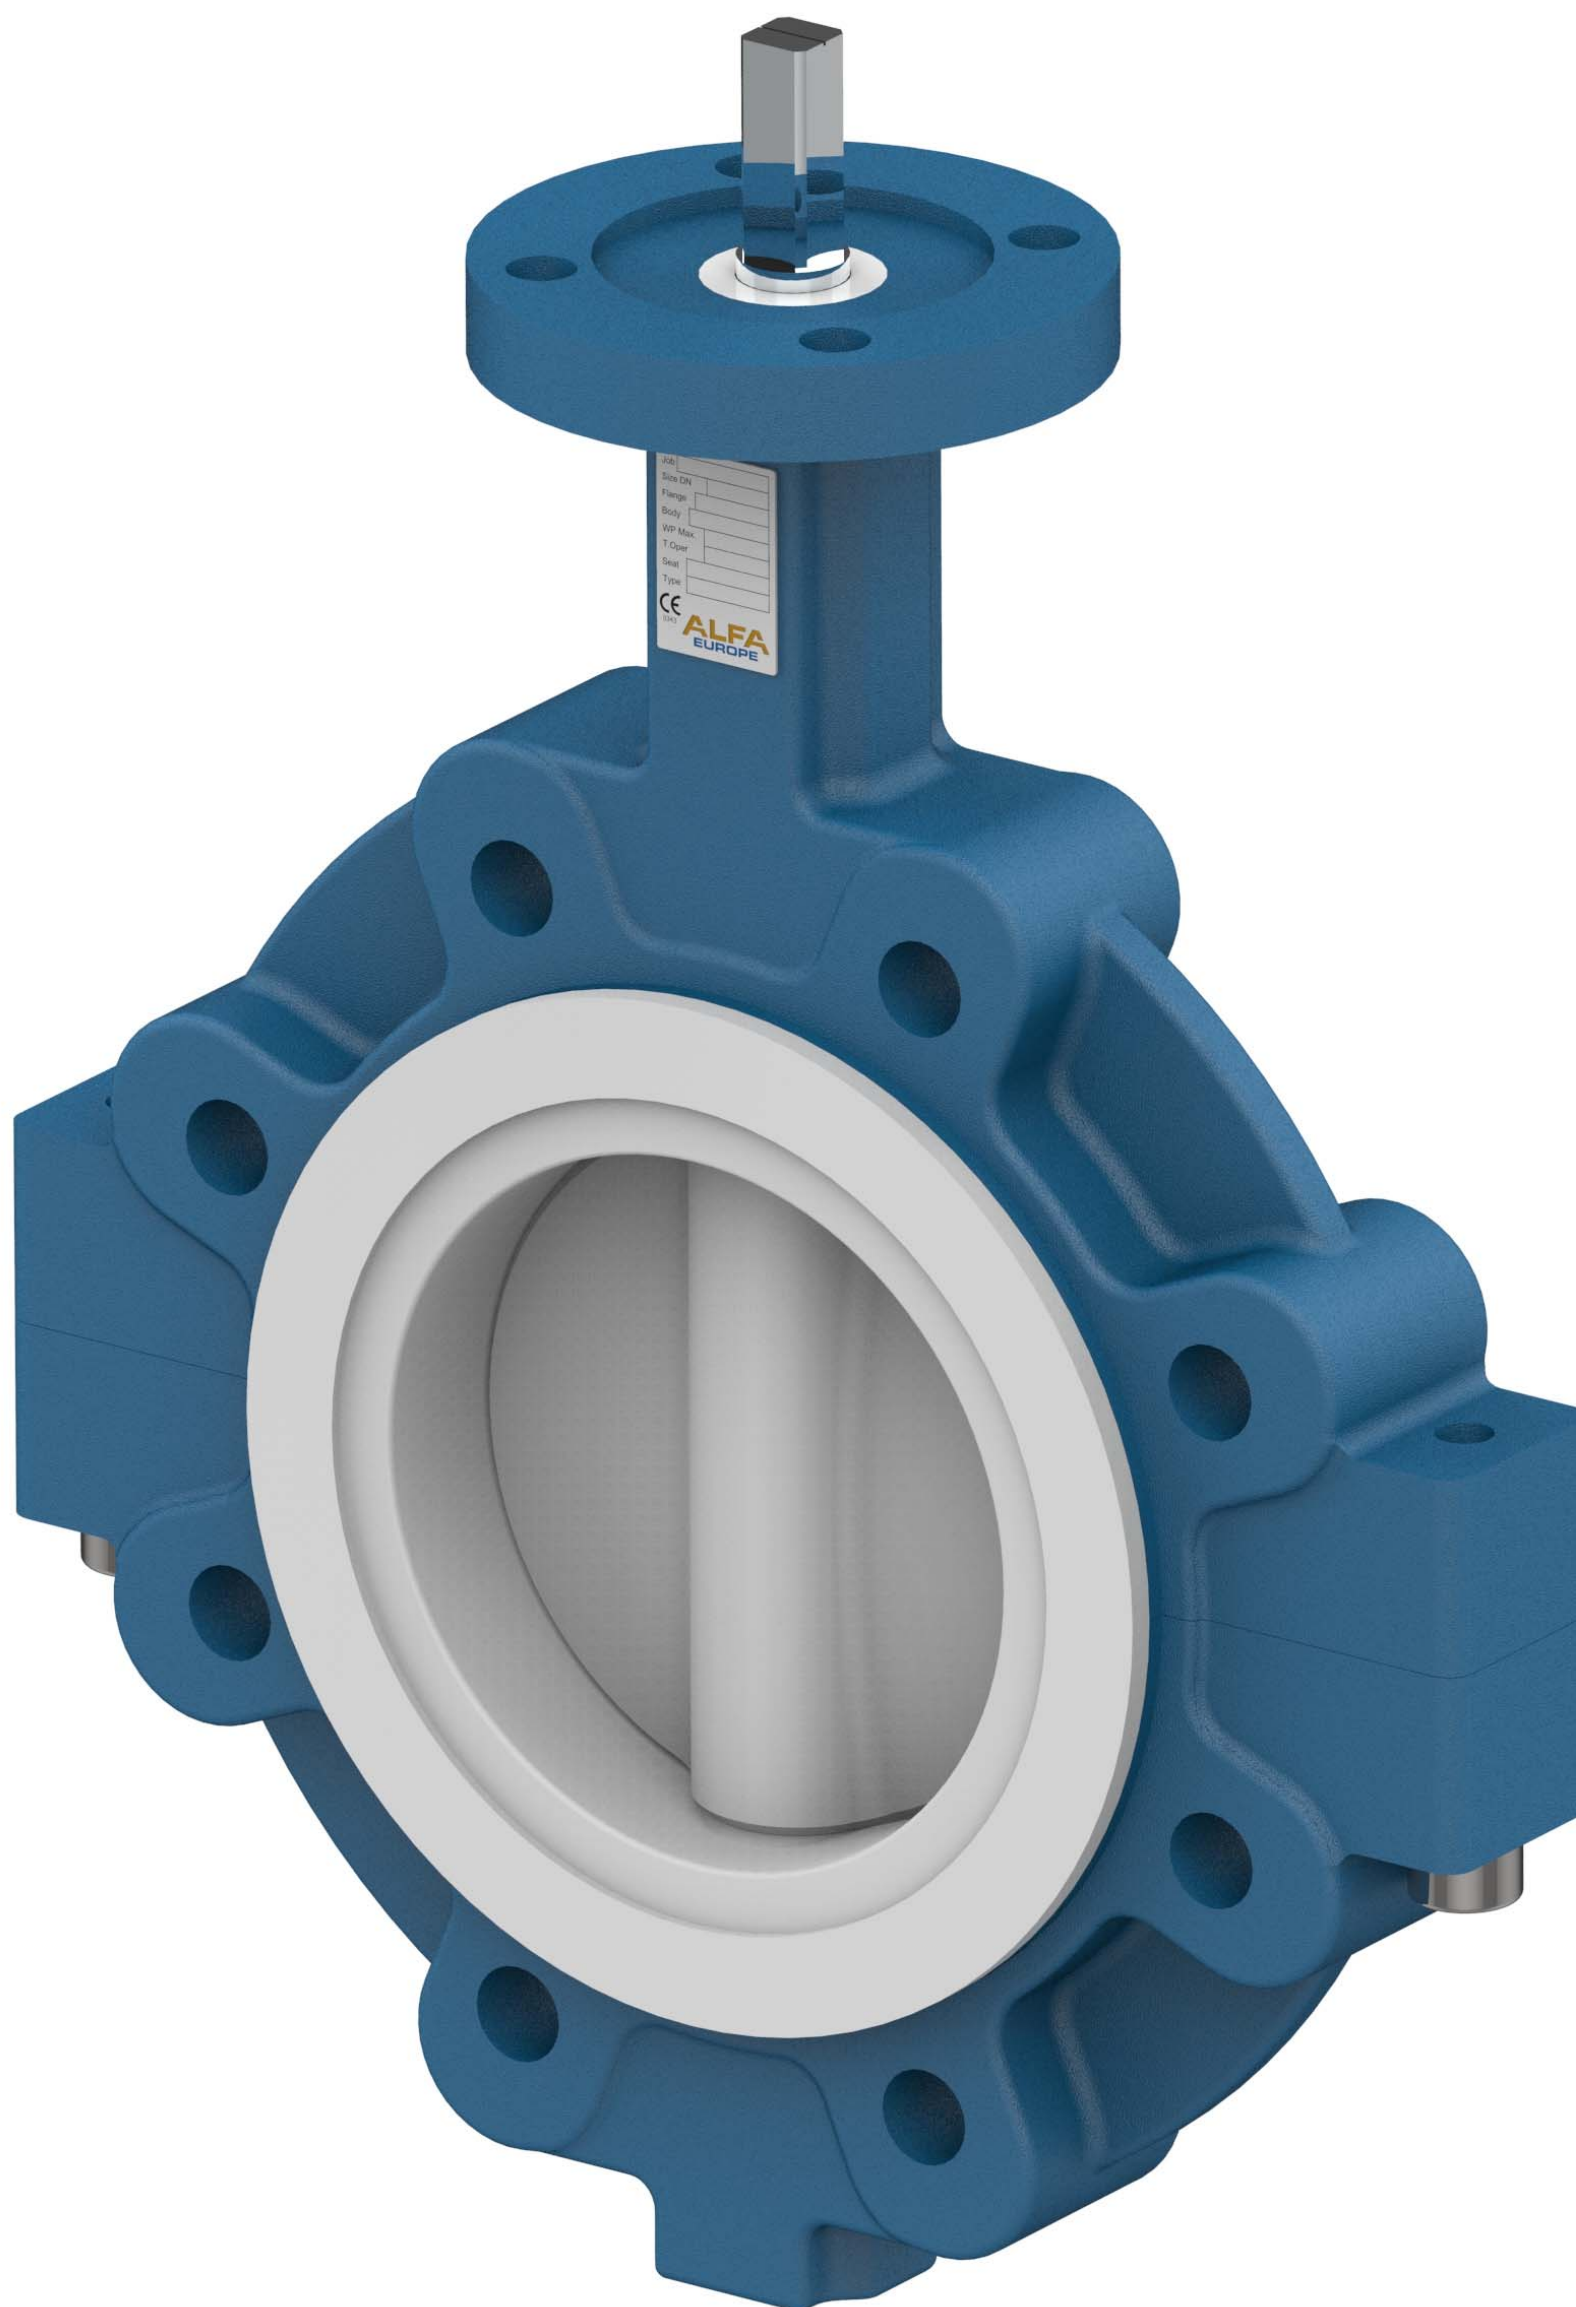


PTFE Lined LUG TYPE S66 - BARE SHAFT DN50 - DN600

Size DN 50 to DN 600, Design EN593
 Face to face acc. EN558.1 series 20
 Flange connections: DIN PN6-10-16
 ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
 Temperature - 20/+ 180°C
 Various pressure ratings up to 16 bar
 Top flange according ISO 5211

Standard available materials :

BODY	DISC	SEAT	TEMP.
EN-JS1030	SS 1.4408	EPDM+PTFE	-20°C / +120°C
A216 WCB	WCB/PTFE	SILICON+PTFE	-20°C / +180°C
SS 1.4408	SS/PTFE	VITON+PTFE	-20°C / +180°C

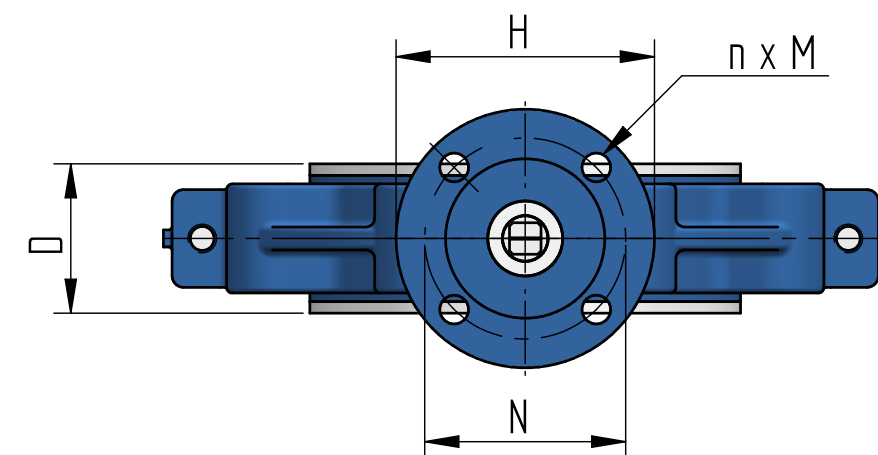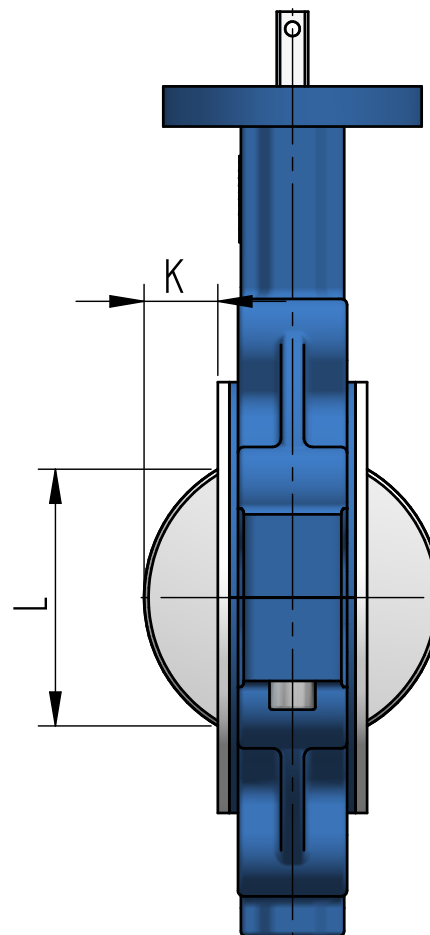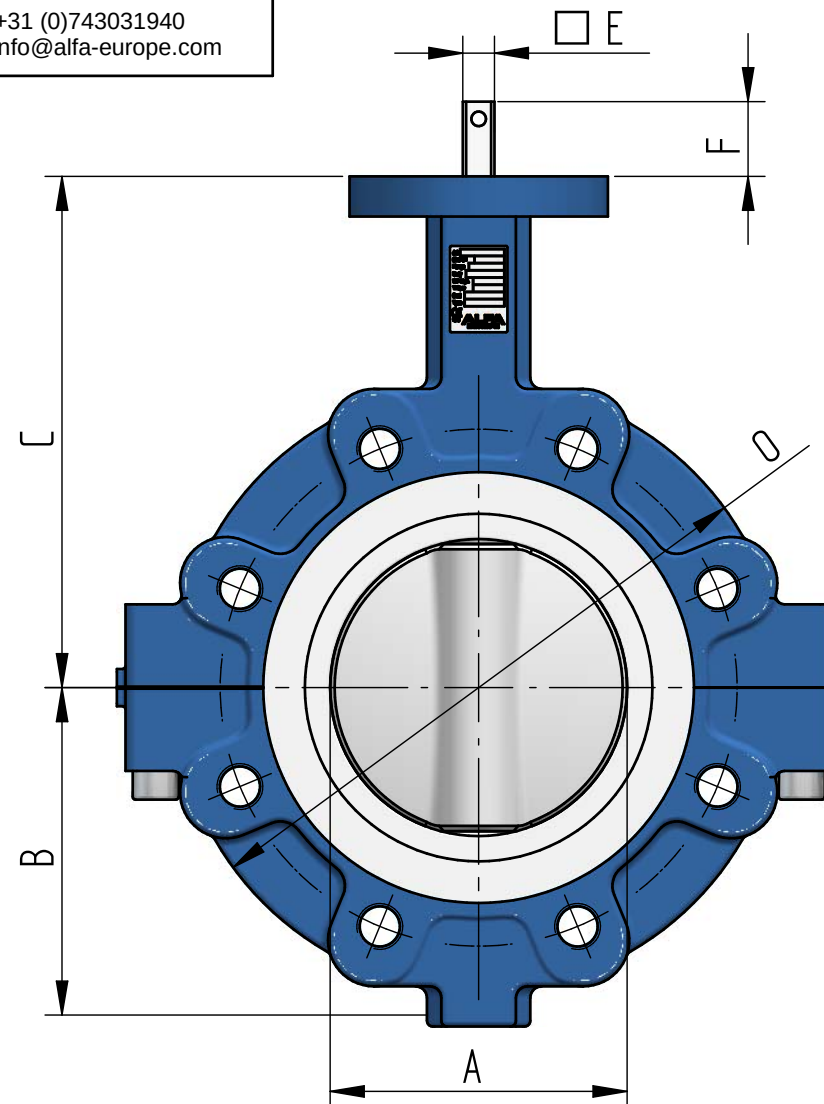

Size	A	B	C	D	E	F	K	L	Topflange				O	Weight ± Kg
									ISO 5211	H	N	n x M		
DN 50	56	75	140	43	[] 11	25	8	39	F07	ø90	ø70	4 x ø10	90	3.7
DN 65	66	82	150	46	[] 11	25	12	50	F07	ø90	ø70	4 x ø10	104	4.6
DN 80	80	90	160	46	[] 11	25	19	68	F07	ø90	ø70	4 x ø10	120	5.7
DN 100	98	118	178	52	[] 11	25	25	85	F07	ø90	ø70	4 x ø10	144	8.2
DN 125	121	131	190	56	[] 14	28	34	109	F07	ø90	ø70	4 x ø10	174	11.0
DN 150	145	145	200	56	[] 14	28	46	135	F07	ø90	ø70	4 x ø10	203	12.3
DN 200	196	173	240	60	[] 17	28	70	188	F10	ø125	ø102	4 x ø12	250	19.5
DN 250	253	208	273	68	[] 22	30	94	244	F10	ø125	ø102	4 x ø12	308	33.3
DN 300	303	244	310	78	[] 22	30	114	293	F10	ø125	ø102	4 x ø12	360	52.0
DN 350	323	260	346	78	[] 27	30	125	315	F12	ø175	ø125	4 x ø14	410	64
DN 400	375	290	375	102	[] 27	30	138	362	F12	ø175	ø125	4 x ø14	465	79
DN 450	427	325	406	114	[] 36	38	159	413	F14	ø175	ø140	4 x ø18	520	127
DN 500	477	360	438	127	[] 36	38	177	461	F14	ø175	ø140	4 x ø18	570	154
DN 600	580	422	495	154	[] 46	48	215	560	F16	ø210	ø165	4 x ø22	675	226