


PTFE LINED LUG TYPE S66 LEVER




PTFE Lined LUG TYPE S66 - LEVER DN50 - DN200

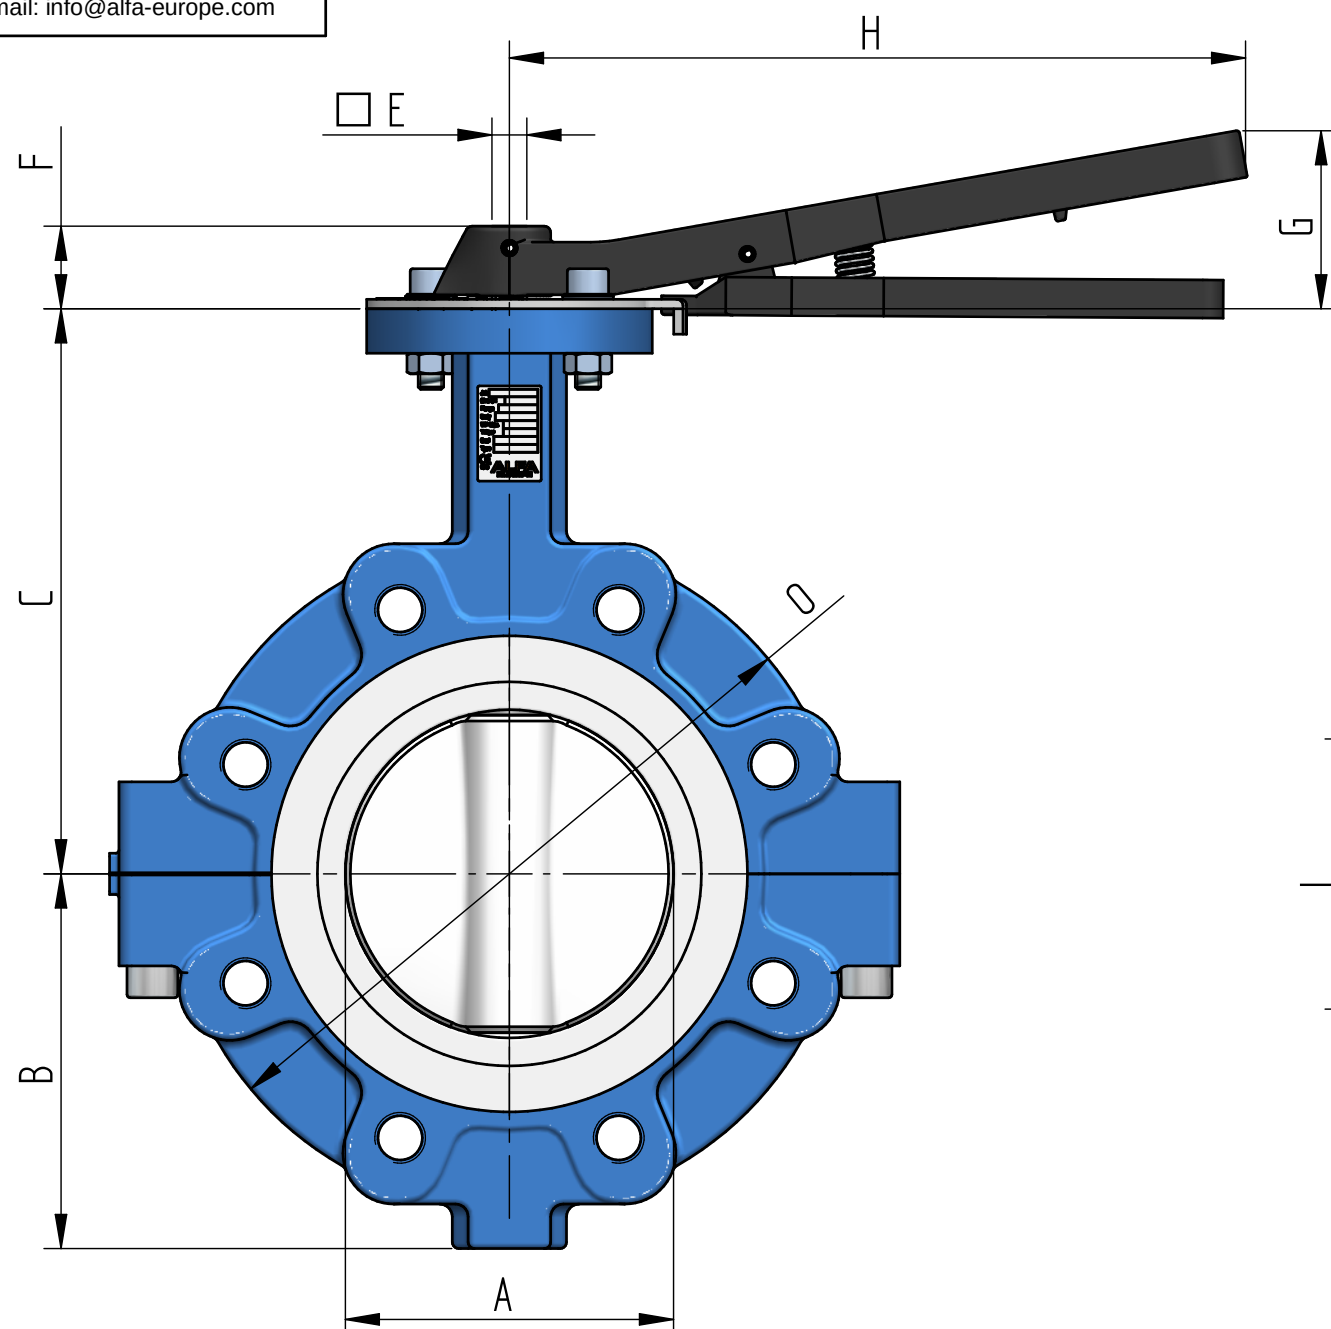

Size DN 50 to DN 200, Design EN593
 Face to face acc. EN558.1 series 20
 Flange connections: DIN PN6-10-16
 ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
 Temperature - 20/+ 180°C
 Various pressure ratings up to 16 bar
 Top flange according ISO 5211

Standard available materials :

BODY	DISC	SEAT	TEMP.
EN-JS1030	SS 1.4408	EPDM+PTFE	-20°C / +120°C
A216 WCB	WCB/PTFE	SILICON+PTFE	-20°C / +180°C
SS 1.4408	SS/PTFE	VITON+PTFE	-20°C / +180°C

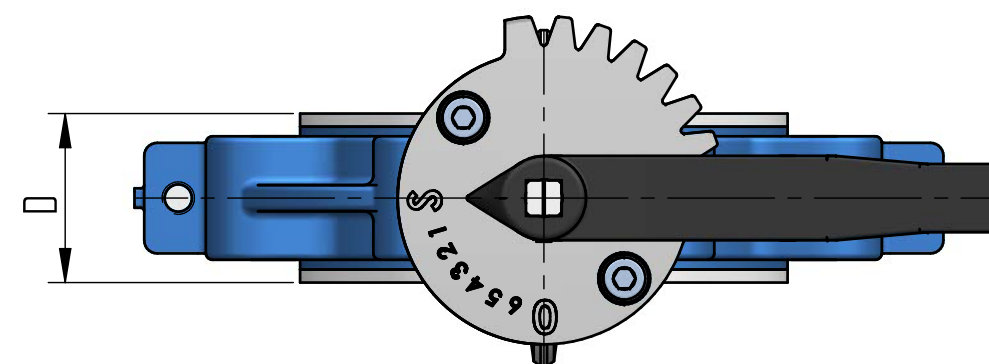

Size	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 50	56	75	140	43	[] 11	26	56	223	8	39	90	4.2
DN 65	66	82	150	46	[] 11	26	56	223	12	50	104	5.1
DN 80	80	90	160	46	[] 11	26	56	223	19	68	120	6.2
DN 100	98	118	178	52	[] 11	26	56	223	25	85	144	8.7
DN 125	121	131	190	56	[] 14	28	68	325	34	109	174	12.2
DN 150	145	145	200	56	[] 14	28	68	325	46	135	203	13.5
DN 200	196	173	240	60	[] 17	30	68	325	70	188	250	20.7