


PTFE LINED WAFER TYPE S48 DOUBLE FLANGED




PTFE Lined DBL. FLANGED TYPE S48 - LEVER DN50 - DN200

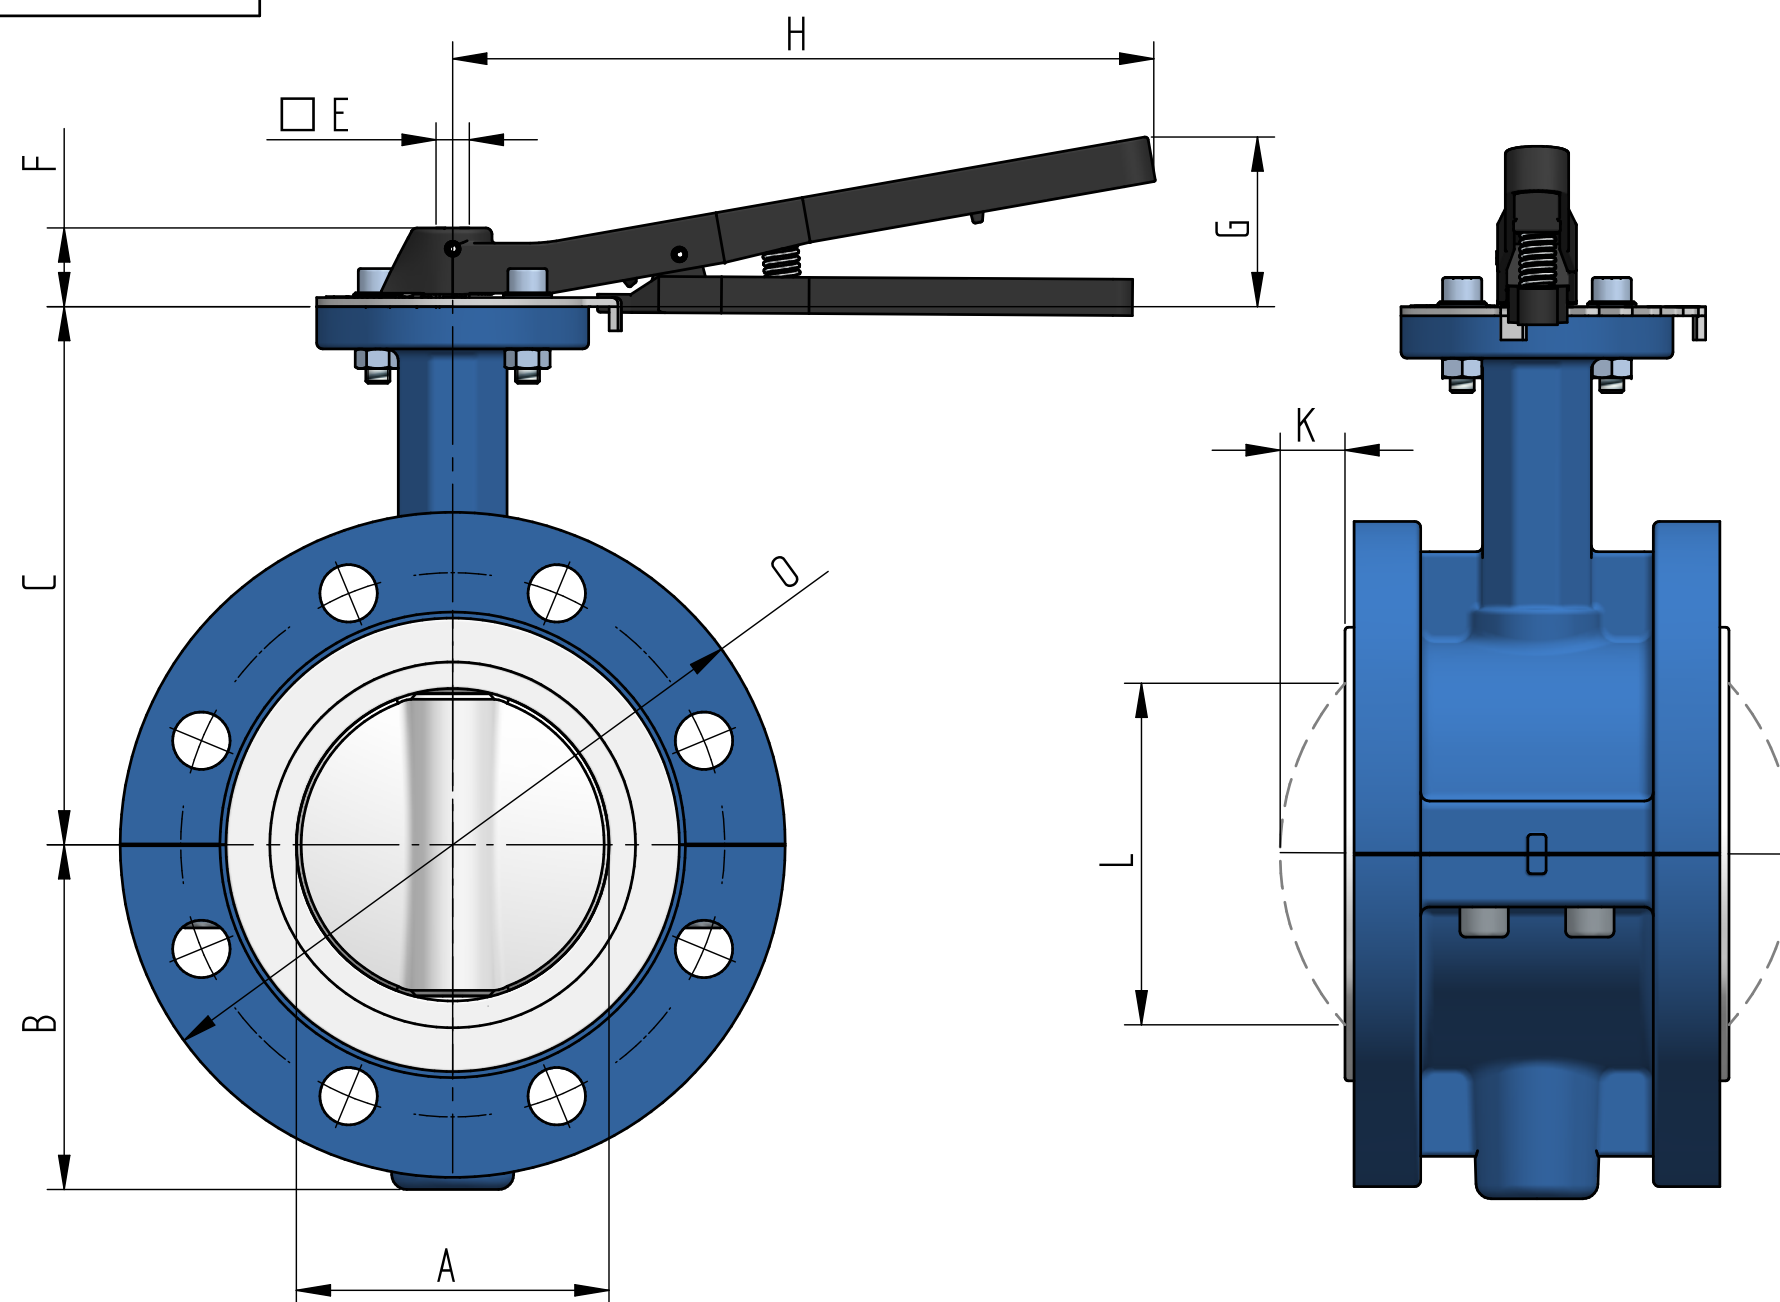

Size DN 50 to DN 200, Design EN593
 Face to face acc. EN558.1 series 13
 Flange connections: DIN PN6-10-16
 ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
 Temperature - 20/+ 180°C
 Various pressure ratings up to 16 bar
 Top flange according ISO 5211

Standard available materials :

BODY	DISC	SEAT	TEMP.
EN-JS1030	1.4408	EPDM+PTFE	-20°C / +120°C
A216 WCB	WCB/PTFE	SILICON+PTFE	-20°C / +180°C
SS 1.4408	SS/PTFE	VITON+PTFE	-20°C / +180°C

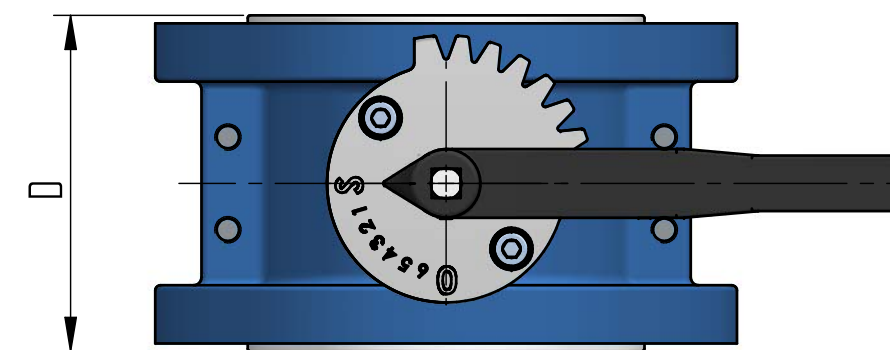

Size	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 50	56	75	140	108	[] 11	25	56	223	--	--	165	8.9
DN 65	66	80	150	112	[] 11	25	56	223	--	--	185	9.7
DN 80	80	90	160	114	[] 11	25	56	223	--	--	200	10.3
DN 100	98	114	178	127	[] 11	25	56	223	--	--	220	14.8
DN 125	121	130	190	140	[] 14	28	68	325	--	--	250	19.4
DN 150	145	145	200	140	[] 14	28	68	325	4	48	285	25.7
DN 200	196	175	240	152	[] 17	28	68	325	24	128	340	45.2