
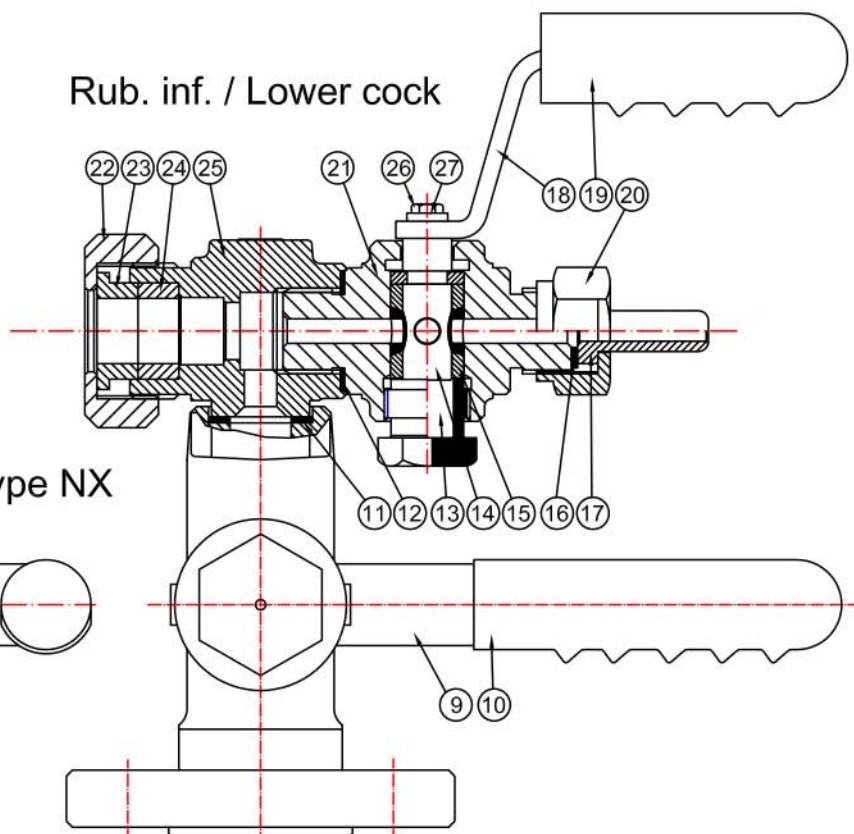


Rub. sup. / Upper cock

Rub. inf. / Lower cock

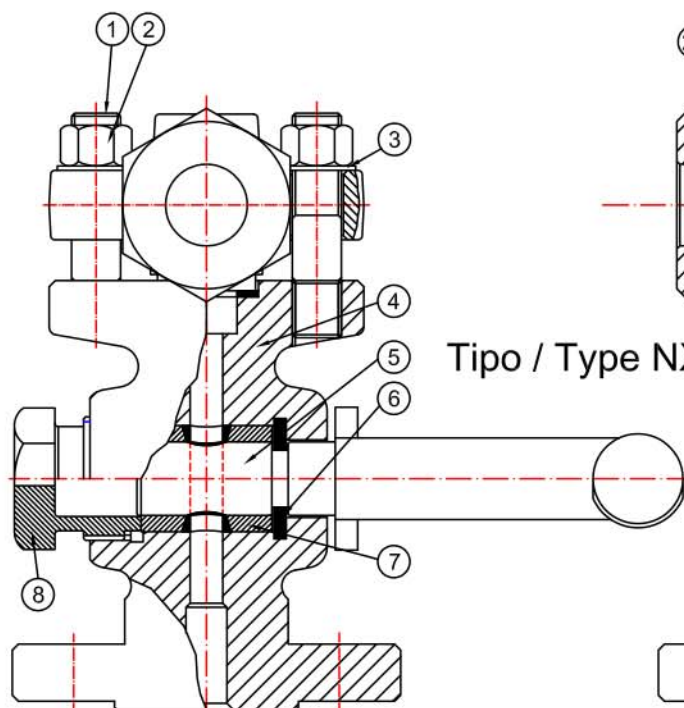

Tipo / Type NX

N°	Descrizione / Description	Materiali / Materials	Materiali / Materials
1	Bullone / Bolt	B7	B8
2	Dado / Nut	2H	Gr.8
3	Rondella / Washer	UNI 6592	ACC. INOX / S.steel
4	Corpo / Body	A105N	F316L
5	Maschio F18 / Plug F18	A316	A316
6	Anello F18 / Ring F18	A316	A316
7	Bossolo F18 / Packing sleeves F18	Grafite / Graphite	Grafite / Graphite
8	Tappo premibossolo F18 / Stuffing box F18	Acc/C / C.steel	ACC. INOX / S.steel
9	Maniglia GR. / Big cock handle	Acc/C / C.steel	Acc/C / C.steel
10	Manopola GR. / Big cover handle	Nylon 66	Nylon 66
11	Anello di tenuta / Joint ring	Es. amianto / No asbestos	Es. amianto / No asbestos
12	Anello di serraggio / Ring thickness	A316	A316
13	Tappo premibossolo F12 / Stuffing box F12	Acc/C / C.steel	ACC. INOX / S.steel
14	Maschio F12 / Plug F12	A316	A316
15	Bossolo F12 / Packing sleeves F12	Grafite / Graphite	Grafite / Graphite
16	Guarn. / Gasket	Es. amianto / No asbestos	Es. amianto / No asbestos
17	Tubetto di conn. / Connection pipe	Acc/C / C.steel	ACC. INOX / S.steel
18	Maniglia PR. / Little cock handle	Acc/C / C.steel	Acc/C / C.steel
19	Manopola PR. / Little cover handle	Nylon 66	Nylon 66
20	Ghiera scarico / Drain cock cover	Acc/C / C.steel	ACC. INOX / S.steel
21	Rub. di scarico / Drain cock	A105N	F316
22	Ghiera di raccordo / Connections cover	Acc/C / C.steel	ACC. INOX / S.steel
23	Anello premibossolo / Stuffing box ring	Acc/C / C.steel	ACC. INOX / S.steel
24	Bossolo F16 / Packing sleeves F16	Grafite / Graphite	Grafite / Graphite
25	Fiangetta / Stuffing box body	A105N	F316
26	Bullone / Cap screw	UNI 5739	UNI 5739
27	Rondella / Washer	UNI 6592	UNI 6592

Connesione di tipo NX = mediante raccordo liscio e premistoppa

Attacchi al processo:
flangiati integrali UNI / DIN PN 10-16 - 25-40 (DN15 > DN 50)
flangiati integrali ANSI 150RF / 300RF / 600RF-RJ / ANSI 900-1500RF-RJ (DN1/2" > DN 2")
filettati di tipo NPT / BSP (Maschio - Femmina)
a saldare di tasca SW

Optional:
bossoli di tenuta in PTFE
allontanatore e sfera di sicurezza Ns. Fig. 31 (in caso di rottura cristallo)

Connection type NX = by end tube and stuffing boxes

Vessel connection:
integral flanges UNI / DIN PN 10-16 - 25-40 (DN15 > DN 50)
integral flanges ANSI 150RF / 300RF / 600RF-RJ / ANSI 900-1500RF-RJ (DN1/2" > DN 2")
screwed as NPT / BSP (Male - Female)
socketed weld

Optional:
packing sleeves PTFE
safety ball release Ns. Fig. 31 (in case of glass breaking)

Rubinetti di intercettazione per indicatori di livello NX PN40
Level cock gauge type NX PN40

FILAL