



M range + XK

Heavy duty Ductile cast iron (GGG40) quarter turn gearbox range.
Standard IP68 Enclosure and available in 11 sizes up to 32.000 Nm.
Suitable for vertical shaft extensions systems.



Type	Bevelgear	Output torque	Ratio	Weight (Kg)
M55	XK-1	550 Nm	1:40	11
M100	XK-1	1.000 Nm	1:34	21
M200	XK-1	2.000 Nm	1:38	22
M350	XK-1	3.500 Nm	1:55	26
M450	XK-5	4.500 Nm	1:208	46
M700	XK-5	7.000 Nm	1:208	50

Type	Bevelgear	Output torque	Ratio	Weight (Kg)
M900	XK-5	9.000 Nm	1:248	60
M1100	XK-5	11.000 Nm	1:248	62
M1700	XK-10	17.000 Nm	1:312	95
M2600	XK-10	26.000 Nm	1:288	138
M3200	XK-10	32.000 Nm	1:348	190

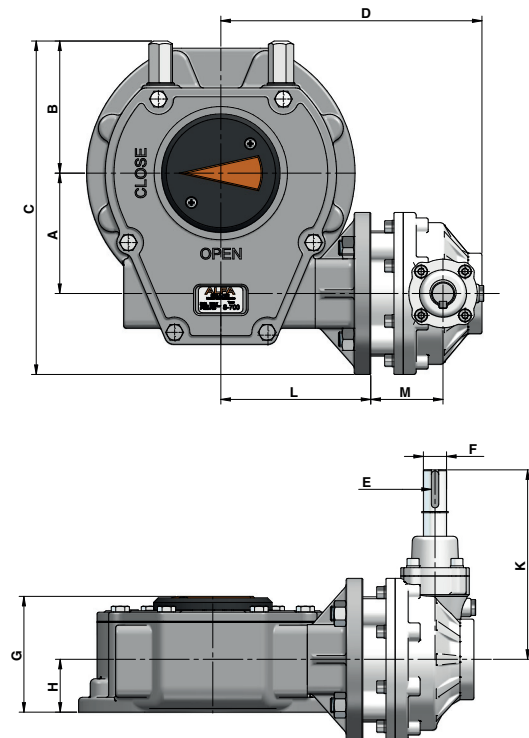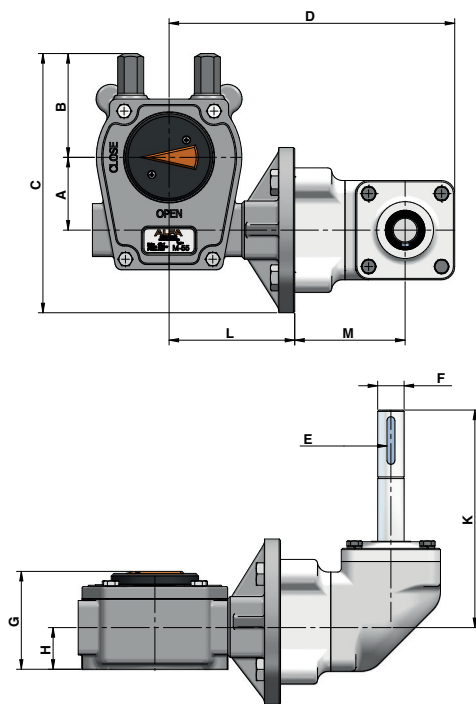

Type	A	B	C	D	E (Key)	F	G	H	K	L	M	Max. Bore/ key	ISO 5211
M55	55	79	196	216	6x6x30	∅20	74	36	165	95	84	∅32 / 10	F07-F10-F12
M100	71	104	238	200	6x6x30	∅20	96	48	165	116	84	∅45 / 14	F10-F12-F14
M200	86	116	264	212	6x6x30	∅20	103	51	165	128	84	∅58 / 16	F10-F12-F14-F16
M350	105	129	296	220	6x6x30	∅20	107	55	165	136	84	∅75 / 20	F12-F14-F16
M450	130	143	360	282	8x7x40	∅25	125	57	205	162	78	∅78 / 22	F14-F16-F25
M700	130	143	360	282	8x7x40	∅25	125	57	205	162	78	∅78 / 22	F14-F16-F25
M900	150	156	394	298	8x7x40	∅25	124	56	205	178	78	∅90 / 25	F16-F25-F30
M1100	150	156	394	298	8x7x40	∅25	124	56	205	178	78	∅90 / 25	F16-F25-F30
M1700	182	190	477	329	8x7x40	∅25	137	63	252	210	70	∅120 / 32	F25-F30-F35
M2600	215	195	525	350	8x7x40	∅25	183	85	252	230	70	∅160 / 40	F25-F30-F35
M3200	256	225	605	380	8x7x40	∅25	196	97	252	260	70	∅160 / 40	F25-F30-F35-F40