



PTFE LINED WAFER TYPE S59 BARE SHAFT

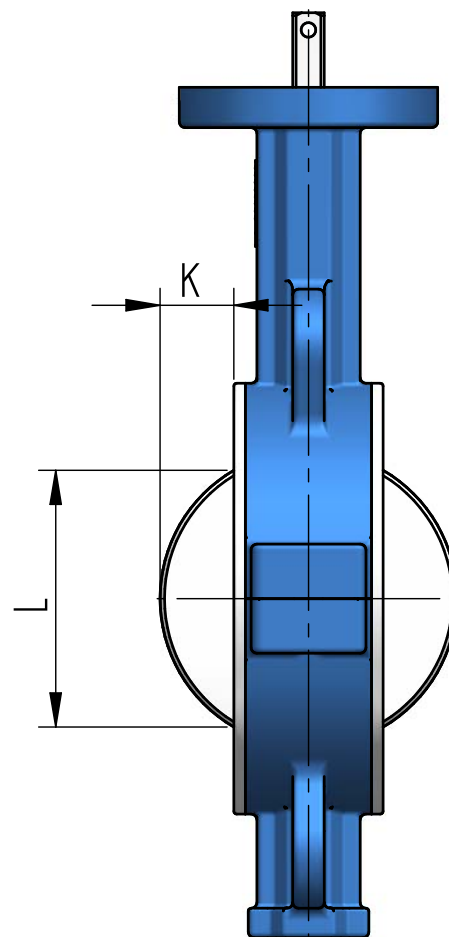


PTFE Lined WAFER TYPE S59 - BARE SHAFT DN50 - DN600

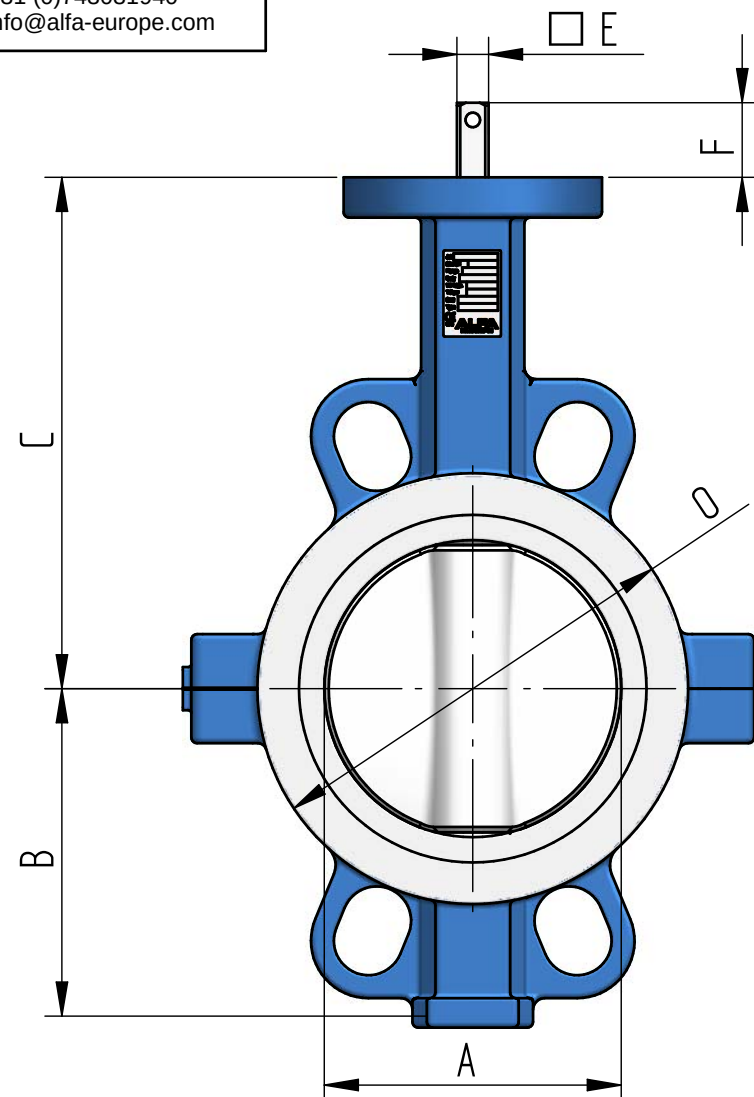

Size DN 50 to DN 600, Design EN593
Face to face acc. EN558.1 series 20
Flange connections:
DIN PN6-10-16, ANSI B 16.5 Cl. 150#
Temperature - 20/+ 180°C
Various pressure ratings up to 16 bar
Top flange according ISO 5211

Standard available materials :

BODY	DISC	SEAT	TEMP.
EN-JS1030	1.4408	EPDM+PTFE	-20°C / +120°C
A216 WCB	WCB/PTFE	SILICON+PTFE	-20°C / +180°C
SS 1.4408	SS/PTFE	VITON+PTFE	-20°C / +180°C

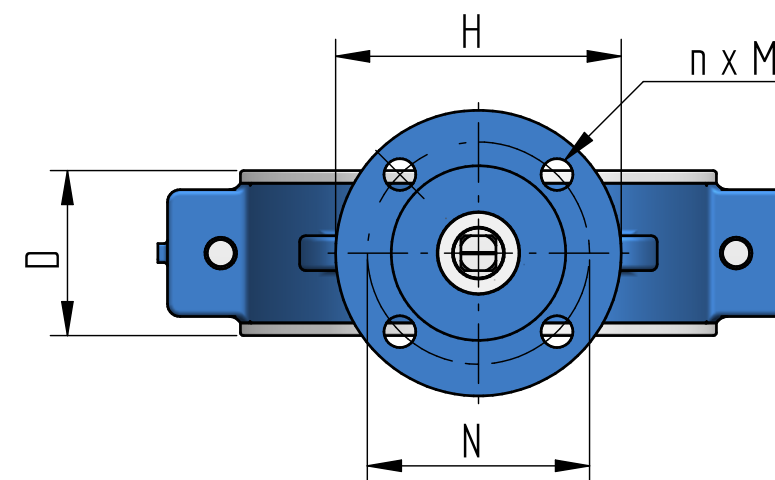

Size	A	B	C	D	E	F	K	L	Topflange				O	Weight ± Kg
									ISO 5211	H	N	n x M		
DN 50	56	75	140	43	[] 11	25	8	39	F07	ø90	ø70	4 x ø10	90	2.5
DN 65	66	82	150	46	[] 11	25	12	50	F07	ø90	ø70	4 x ø10	104	3.3
DN 80	80	90	160	46	[] 11	25	19	68	F07	ø90	ø70	4 x ø10	120	3.6
DN 100	98	118	178	52	[] 11	25	25	85	F07	ø90	ø70	4 x ø10	144	5.2
DN 125	121	131	190	56	[] 14	28	34	109	F07	ø90	ø70	4 x ø10	174	7.2
DN 150	145	145	200	56	[] 14	28	46	135	F07	ø90	ø70	4 x ø10	203	8.4
DN 200	196	173	240	60	[] 17	28	70	188	F10	ø125	ø102	4 x ø12	250	13.8
DN 250	253	208	273	68	[] 22	30	94	244	F10	ø125	ø102	4 x ø12	308	21.0
DN 300	303	244	310	78	[] 22	30	114	293	F10	ø125	ø102	4 x ø12	360	31.7
DN 350	323	260	346	78	[] 27	30	125	315	F12	ø175	ø125	4 x ø14	410	57
DN 400	375	290	375	102	[] 27	30	138	362	F12	ø175	ø125	4 x ø14	465	77
DN 450	427	325	406	114	[] 36	38	159	413	F14	ø175	ø140	4 x ø18	520	124
DN 500	477	360	438	127	[] 36	38	177	461	F14	ø175	ø140	4 x ø18	570	154
DN 600	580	422	495	154	[] 46	48	215	560	F16	ø210	ø165	4 x ø22	675	226