


DOUBLE FLANGE TYPE - S98/3

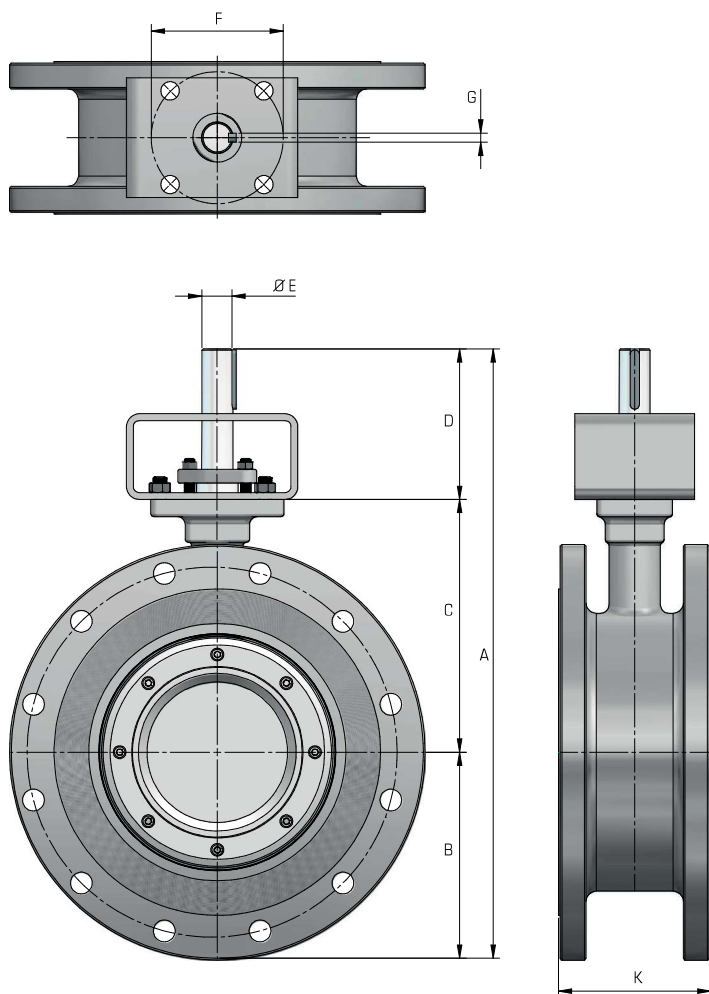

S98-3 150# - PN10/16/25

DN	A	B	C	D	E	F	G	K	TORQUE N.M
80	322	85	197	40	14	F07	5	48	80
100	344	100	204	40	16	F07	6	54	142
125	458	138	260	60	19	F10	6	57	264
150	479	147	272	60	21	F10	8	57	362
200	552	185	307	60	25	F12	8	64	800
250	630	215	355	60	30	F14	10	71	1200
300	707	252	395	60	31	F14	10	81	1510
350	812	287	445	80	40	F16	14	92	2458
400	897	317	490	90	45	F25	14	102	2850
450	939	342	507	90	45	F25	14	114	4536
500	997	372	535	90	49	F25	16	127	6000
600	1133	438	605	90	53	F25	18	154	8400

S98-3 300# - PN40

DN	A	B	C	D	E	F	G	K	TORQUE N.M
80	347	100	207	40	17	F07	5	48	144
100	382	120	222	40	19	F07	6	54	224
125	490	158	272	60	25	F12	8	59	600
150	530	180	290	60	25	F12	8	59	798
200	610	215	335	60	36	F14	10	73	1960
250	712	252	400	60	40	F16	12	83	2270
300	802	282	440	80	45	F16	14	92	3500
350	905	330	485	90	50	F25	14	117	6000
400	950	350	510	90	60	F25	18	133	8000
450	1070	400	550	120	70	F30	20	149	9000
500	1153	433	600	120	80	F30	2x22	159	12000
600	1274	514	640	120	85	F30	2x22	181	18000

S98-3 600# - PN64

DN	A	B	C	D	E	F	G	K	TORQUE N.M
80	385	105	240	40	22	F10	6	64	340
100	437	137	240	60	25	F12	8	64	633
125	505	165	280	60	30	F12	8	78	960
150	605	200	345	60	35	F16	10	78	1630
200	692	232	380	80	45	F16	14	102	4000
250	807	277	440	90	50	F25	14	114	6000
300	875	320	465	90	55	F25	16	140	65000
350	967	350	527	90	60	F25	18	155	10913
400	1096	406	570	120	85	F30	2x22	178	18000
450	1172	437	615	120	95	F35	2x25	200	25000
500	1363	543	670	150	100	F35	2x25	216	30000
600	1504	569	755	180	120	F40	2x28	232	44799