
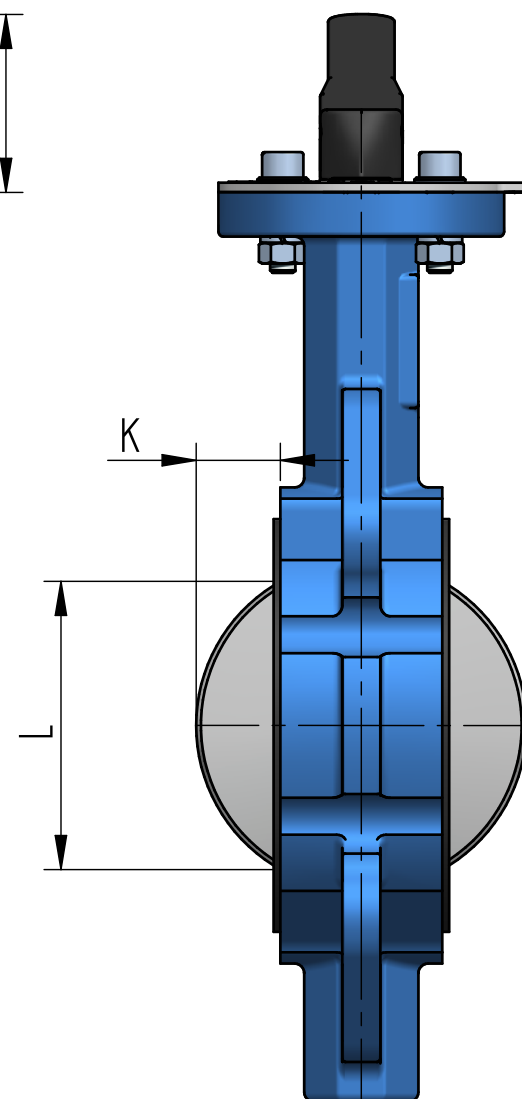



A blue manual valve with a black handle and a silver-colored body. The valve has a circular opening in the center. A label on the side of the valve reads "ALFA EUROPE" and includes a table with the following fields: Job, Size DN, Body, W.P. Max, T. Layer, Seal, and Type. The handle is black and has a spring mechanism. The valve is shown in a closed position.

WAFFER TYPE S52 - LEVER OPERATED DN40 - DN200

Size DN 40 to DN 200
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16
ANSI B 16.5 Cl. 150#, JIS 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 16 bar
Top flange according ISO 5211

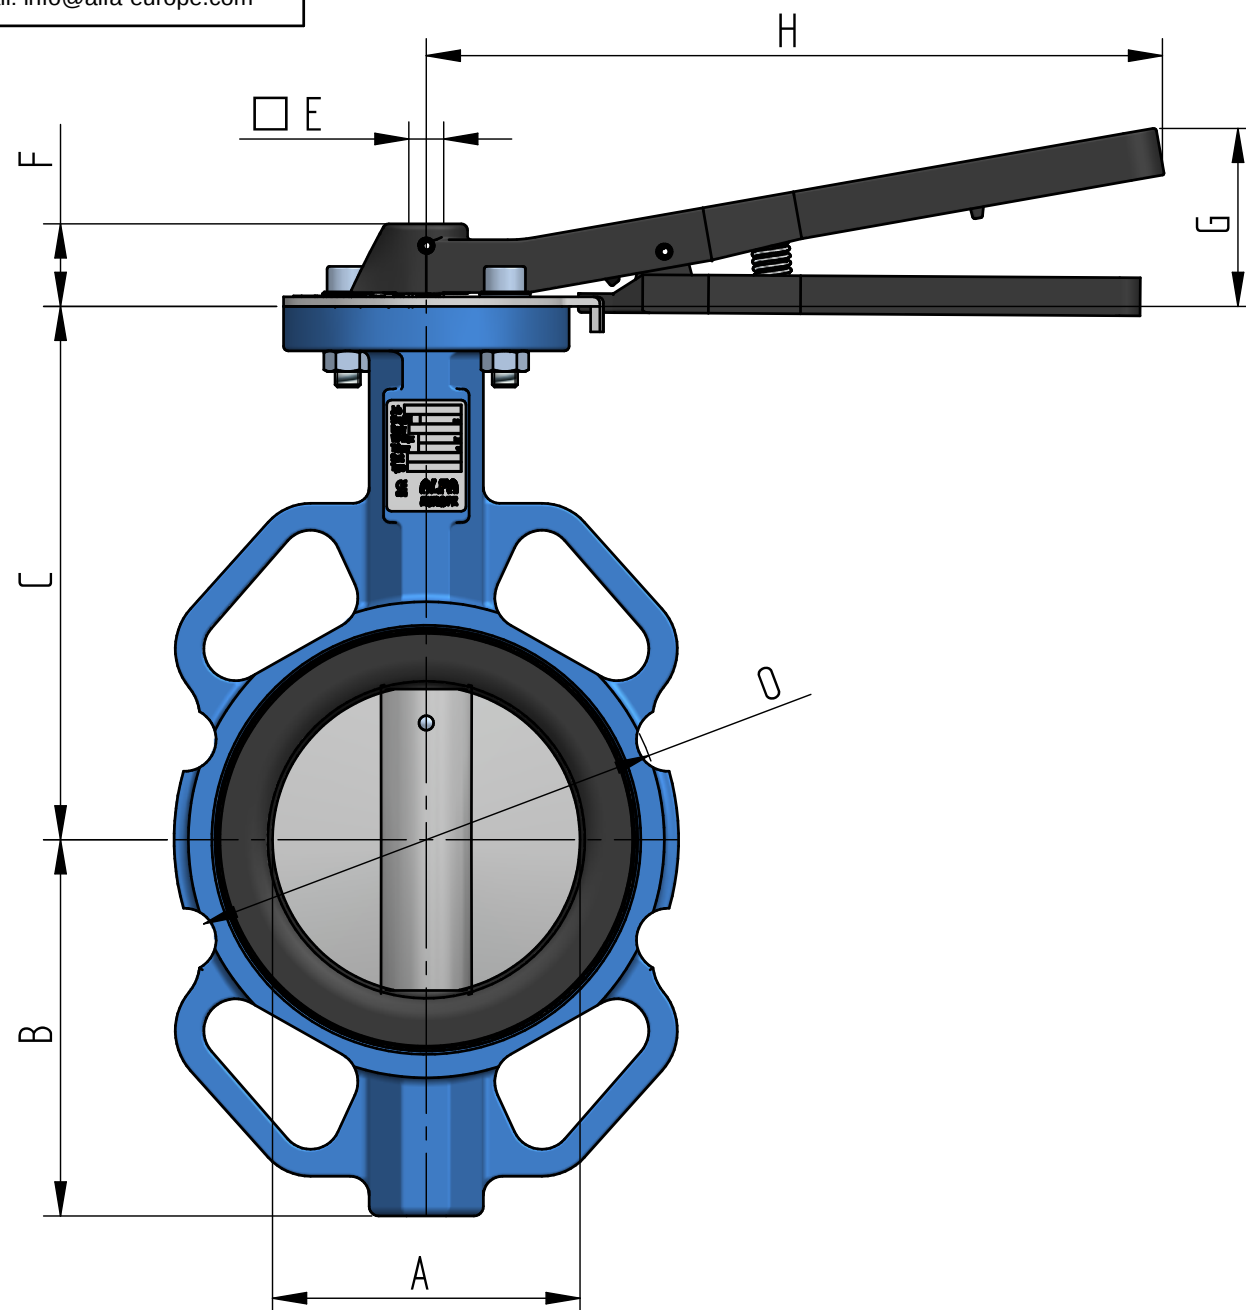

Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 410	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 416	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	--
BS 1400 AB2	SD 2507	SD F53	--

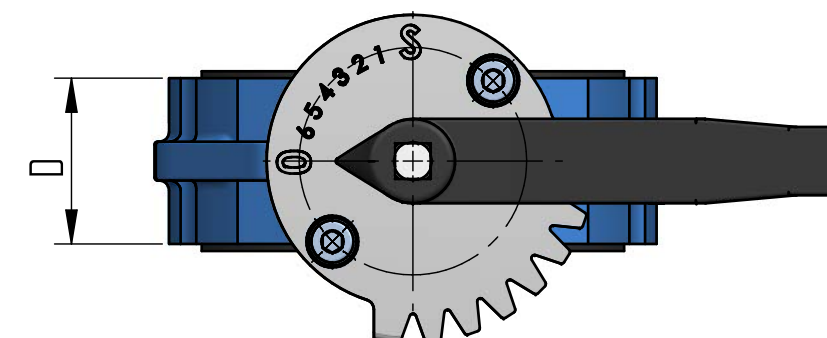

Size	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	37	66	130	33	[] 11	25	50	200	5	26	84	2.1
DN 50	43	70	141	42	[] 11	25	50	200	--	--	92	2.7
DN 65	58	79	150.5	44.5	[] 11	25	50	200	7	39	104	3.2
DN 80	74	98.5	156.5	44.5	[] 11	25	50	200	15	61	120	3.6
DN 100	97	118.5	168	51	[] 11	26	56	223	26	91	150	5.2
DN 125	116	129.5	186.5	54.5	[] 14	28	68	325	31	103	180	7.9
DN 150	147	142	206	54.5	[] 14	28	68	325	47	137	206	8.6
DN 200	194	176	230.5	60	[] 17	30	68	325	72	194	260	13.0