

## 130167 ASEPTIK NORMATIVE DIN 11864-3 REIHE C\_NKS FORM A FEMALE



TWO-way ball valve "Integral Seal"

Drive: Inox lever

Connection: **ASEPTIK normative DIN 11864-3 REIHE C, NKS Form A.**  
**For TUBE according to normative DIN 11866-C (ASTM A-270)**

Flow: Full and reduced

Material: Aisi 316L (1.4404)

Measure: from DN10 to DN100

Seals: Virgin P.T.F.E.

Operating temperature: -20°C+160°C

Outer finish: Polished

On request:

Antistatic device ATEX:


II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db


M.O.C.A. CE 1935/2004

• Seals made of:

PTFE with glass -20°C+170°C

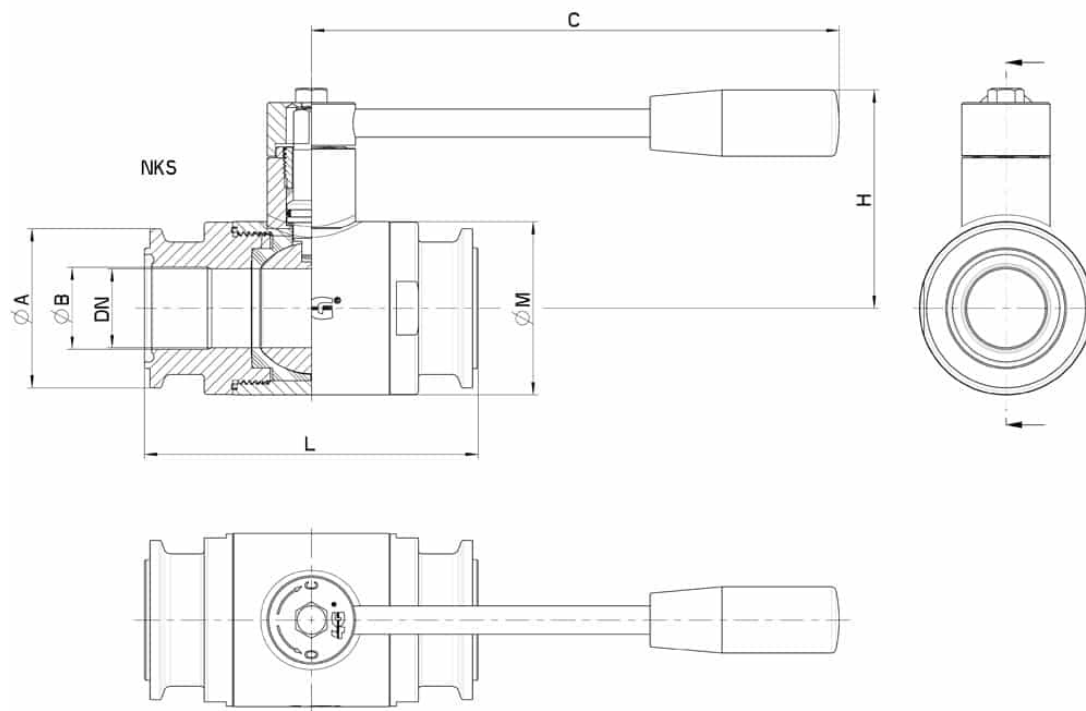

| INCH.  | DN  | NKS - Form A | L   | Ø A  | Ø B  | C   | H   | Ø M | PN  | Kg | COD. AISI 316L |
|--------|-----|--------------|-----|------|------|-----|-----|-----|-----|----|----------------|
| 1/2"   | 10  | Ø 34         | 88  | 34   | 9,4  | 110 | 55  | 35  | 100 | -  | 130167 61210   |
| 3/4"   | 15  | Ø 34         | 92  | 34   | 15   | 110 | 60  | 42  | 100 | -  | 130167 61810   |
| 1"     | 20  | Ø 50,5       | 102 | 50,5 | 22,1 | 160 | 65  | 48  | 100 | -  | 130167 62410   |
| 1"     | 25  | Ø 50,5       | 106 | 50,5 | 22,1 | 160 | 70  | 55  | 64  | -  | 130167 62610   |
| 1" 1/2 | 32  | Ø 64         | 112 | 64   | 34,8 | 160 | 75  | 65  | 64  | -  | 130167 63210   |
| 1" 1/2 | 40  | Ø 64         | 126 | 64   | 34,8 | 190 | 85  | 80  | 64  | -  | 130167 63410   |
| 2"     | 40  | Ø 77,5       | 126 | 77,5 | 47,5 | 190 | 85  | 80  | 40  | -  | 130167 63610   |
| 2"     | 50  | Ø 77,5       | 136 | 77,5 | 47,5 | 190 | 95  | 95  | 40  | -  | 130167 63810   |
| 2" 1/2 | 50  | Ø 91         | 136 | 91   | 60,2 | 190 | 95  | 95  | 40  | -  | 130167 64210   |
| 2" 1/2 | 65  | Ø 91         | 154 | 91   | 60,2 | 220 | 115 | 113 | 40  | -  | 130167 64410   |
| 3"     | 65  | Ø 106        | 154 | 106  | 72,9 | 220 | 115 | 113 | 40  | -  | 130167 64510   |
| 3"     | 80  | Ø 106        | 184 | 106  | 72,9 | 285 | 135 | 140 | 40  | -  | 130167 64810   |
| 4"     | 100 | Ø 130        | 190 | 130  | 97,4 | 310 | 150 | 167 | 25  | -  | 130167 65410   |

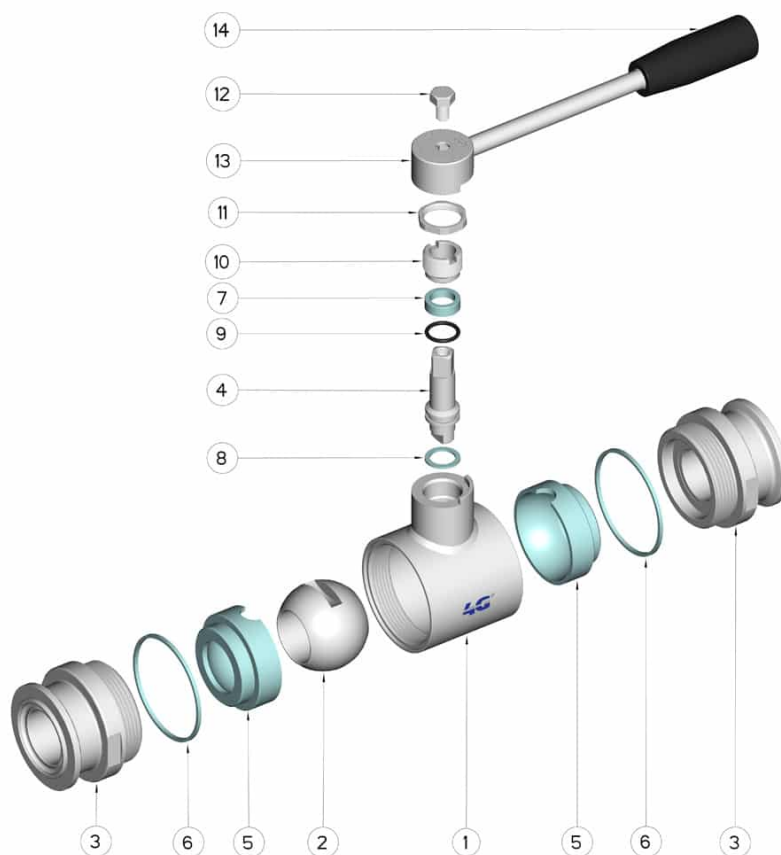

| POS. | DENOMINATION  | PCS | MAT.            |
|------|---------------|-----|-----------------|
| 1    | Body          | 1   | AISI 316L       |
| 2    | Ball          | 1   | AISI 316L       |
| 3    | Sleeves       | 2   | AISI 316L       |
| 4    | Stem          | 1   | AISI 316L       |
| 5    | Ball Seals    | 2   | PTFE            |
| 6    | Sleeve Seals  | 2   | PTFE            |
| 7    | Stem Seal     | 1   | PTFE            |
| 8    | Stem Seal     | 1   | PTFE            |
| 9    | Stem or-Seal  | 1   | FKM             |
| 10   | Register ring | 1   | AISI 304L (303) |
| 11   | Locknut       | 1   | AISI 304L       |
| 12   | Vite          | 1   | AISI 304L       |
| 13   | Lever         | 1   | AISI 304L       |
| 14   | Handle        | 1   | DUROPLAST (PF)  |

