


## 658230 PIN VALVE CLAMP WITH GRADUATE HANDWHEEL

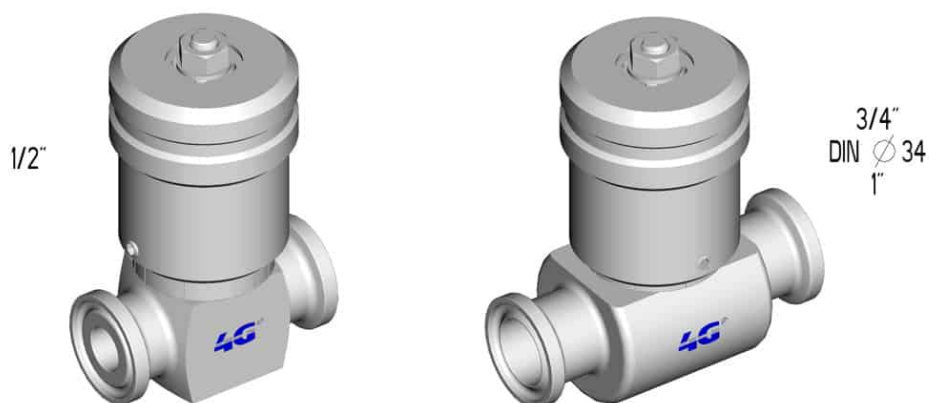

PIN valve

Drive: GRADUATE Handwheel

Connection: CLAMP normative DIN 32676 TAB.4 REIHE C e TAB.2 REIHE A

Material: Aisi 316L

Measure: from 1/2" to 1"

Operating temperature: -20°C+160°C

Outer finish: Polished


On request:

Antistatic device ATEX:


II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db

M.O.C.A. CE 1935/2004

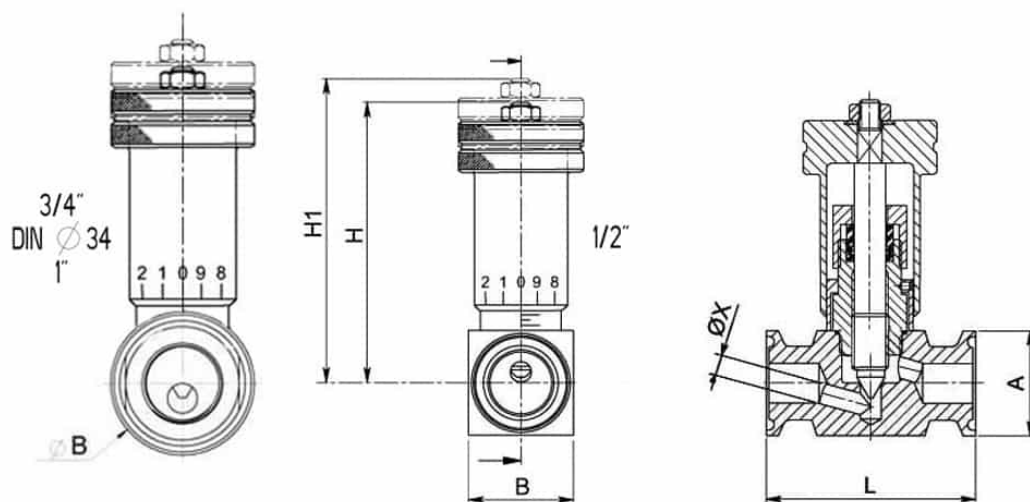

| CLAMP | Ø A  | L  | B    | H   | H 1 | Ø X | PN  | Kg   | CODE AISI 316L |
|-------|------|----|------|-----|-----|-----|-----|------|----------------|
| 1/2"  | 24.8 | 52 | 25   | 70  | 78  | 5   | 160 | 0,48 | 658230 61100   |
| 3/4"  | 24.8 | 70 | Ø 35 | 67  | 80  | 6   | 100 | -    | 658230 61500   |
| DIN   | 34   | 70 | Ø 35 | 67  | 80  | 6   | 100 | 0,48 | 658230 61900   |
| 1"    | 50.5 | 90 | Ø 52 | 104 | 119 | 10  | 100 | -    | 658230 62300   |

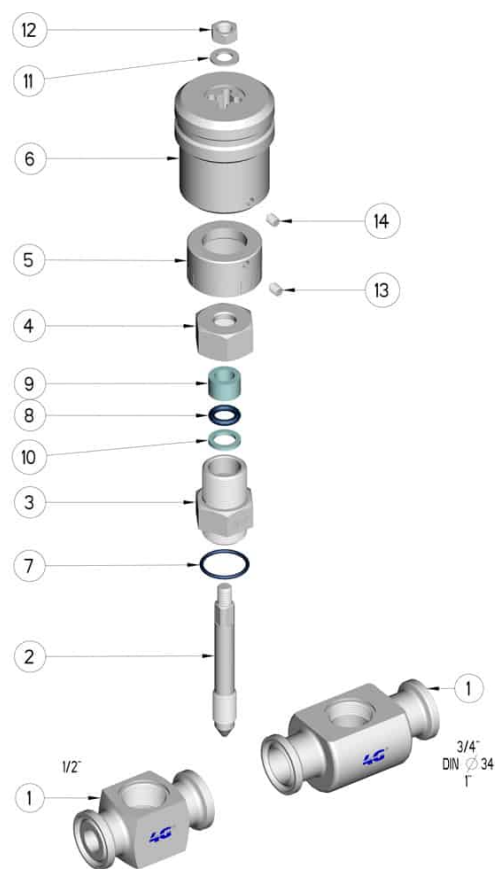

| POS. | DENOMINATION       | PCS | MAT.                           |
|------|--------------------|-----|--------------------------------|
| 1    | Body               | 1   | AISI 316L                      |
| 2    | Needle             | 1   | AISI 316L                      |
| 3    | Screw              | 1   | AISI 316L                      |
| 4    | Stopper nut        | 1   | AISI 316L                      |
| 5    | Graduate ring      | 1   | AISI 316L                      |
| 6    | Graduate handwheel | 1   | AISI 304L                      |
| 7    | OR                 | 1   | FKM                            |
| 8    | OR                 | 1   | FKM                            |
| 9    | Seal               | 1   | PTFE Caricato Vetro/With glass |
| 10   | Seal               | 1   | PTFE                           |
| 11   | Washer             | 1   | AISI 304L                      |
| 12   | Nut                | 1   | AISI 304L                      |
| 13   | SCREW              | 1   | AISI 304L                      |
| 14   | SCREW              | 1   | AISI 304L                      |

