



JIS SHORT DOUBLE FLANGED TYPE S36 LEVER OPERATED

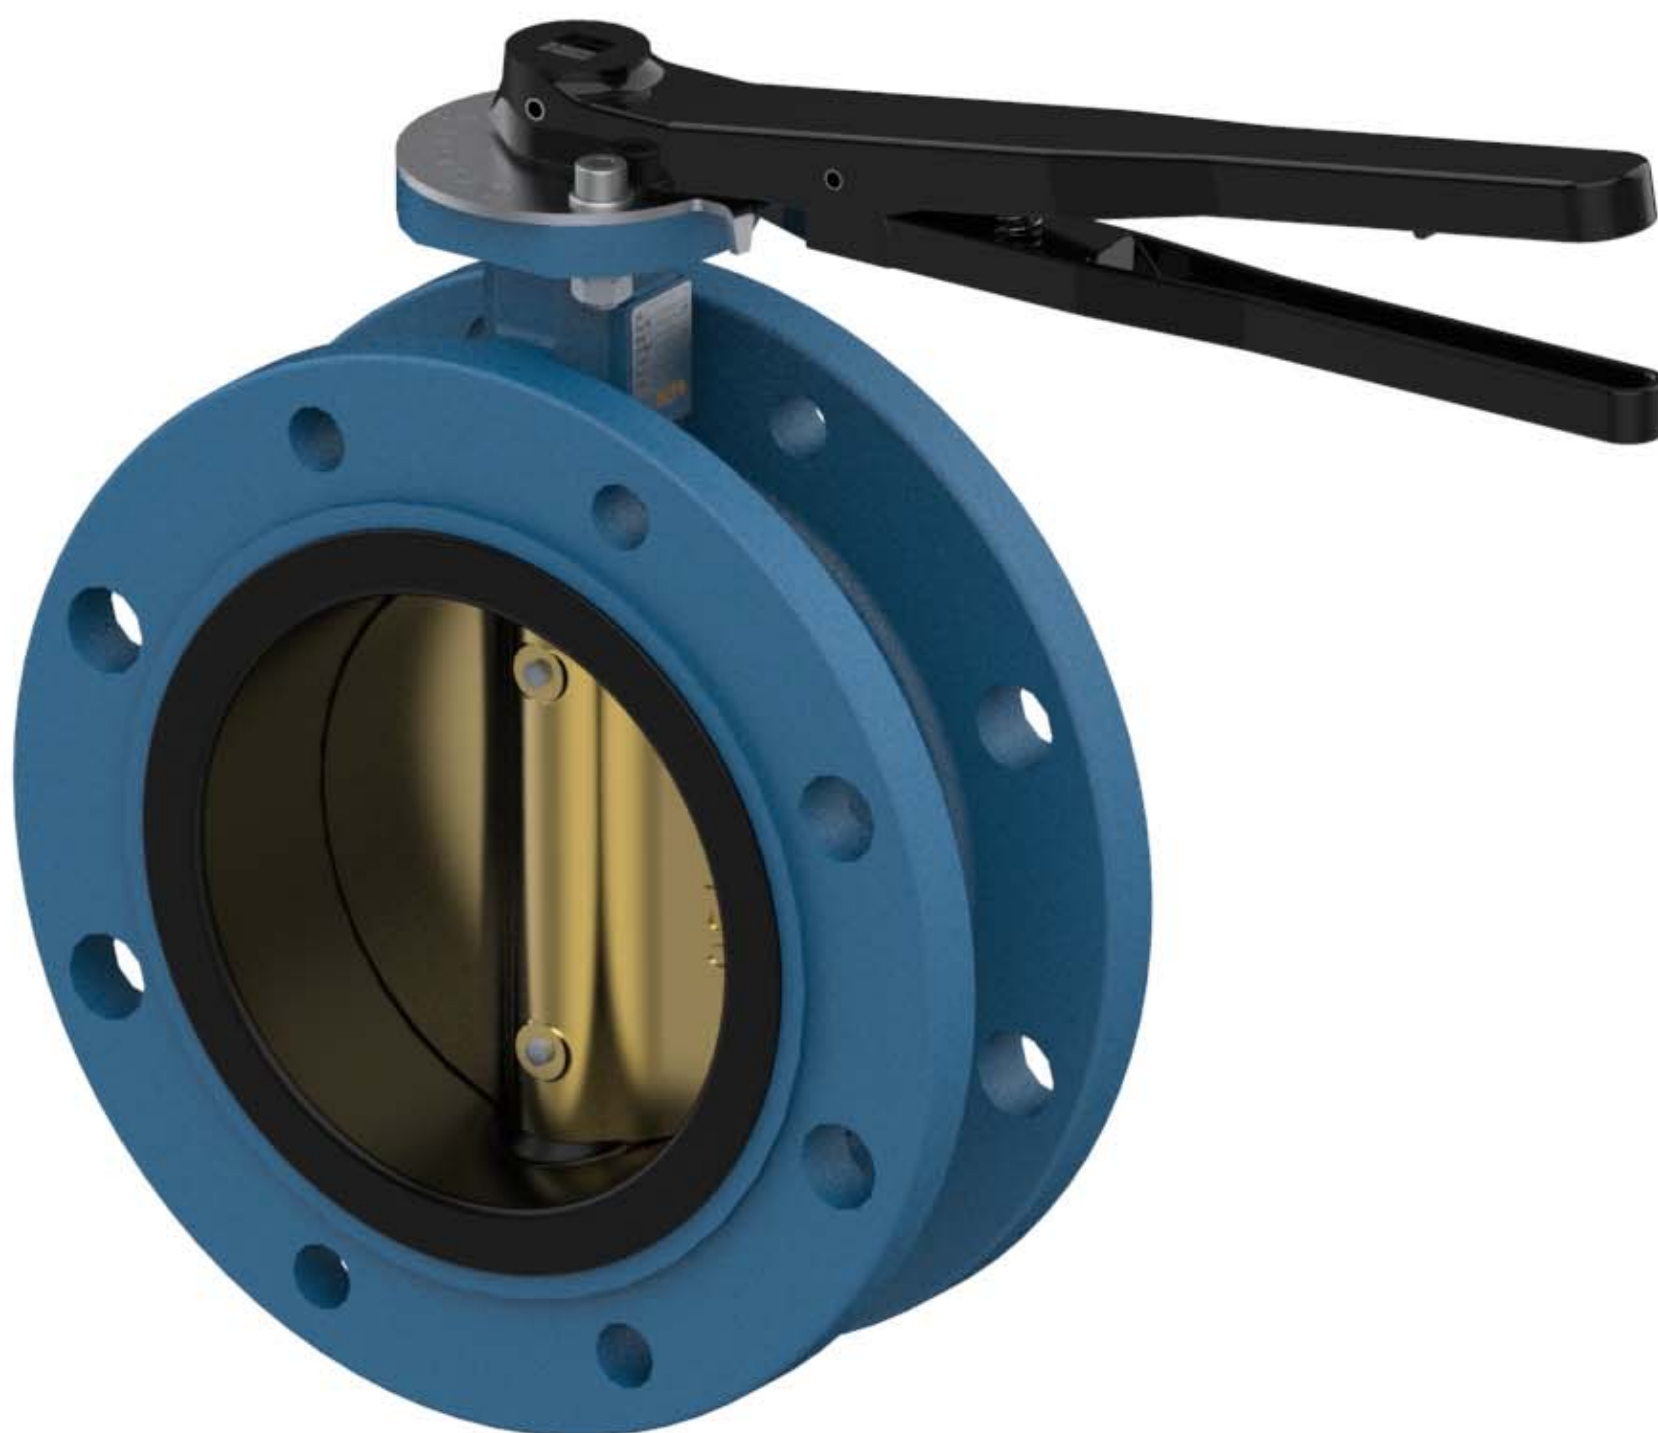


JIS SHORT DOUBLE FLANGED TYPE S36 - LEVER OPERATED DN50 - DN200

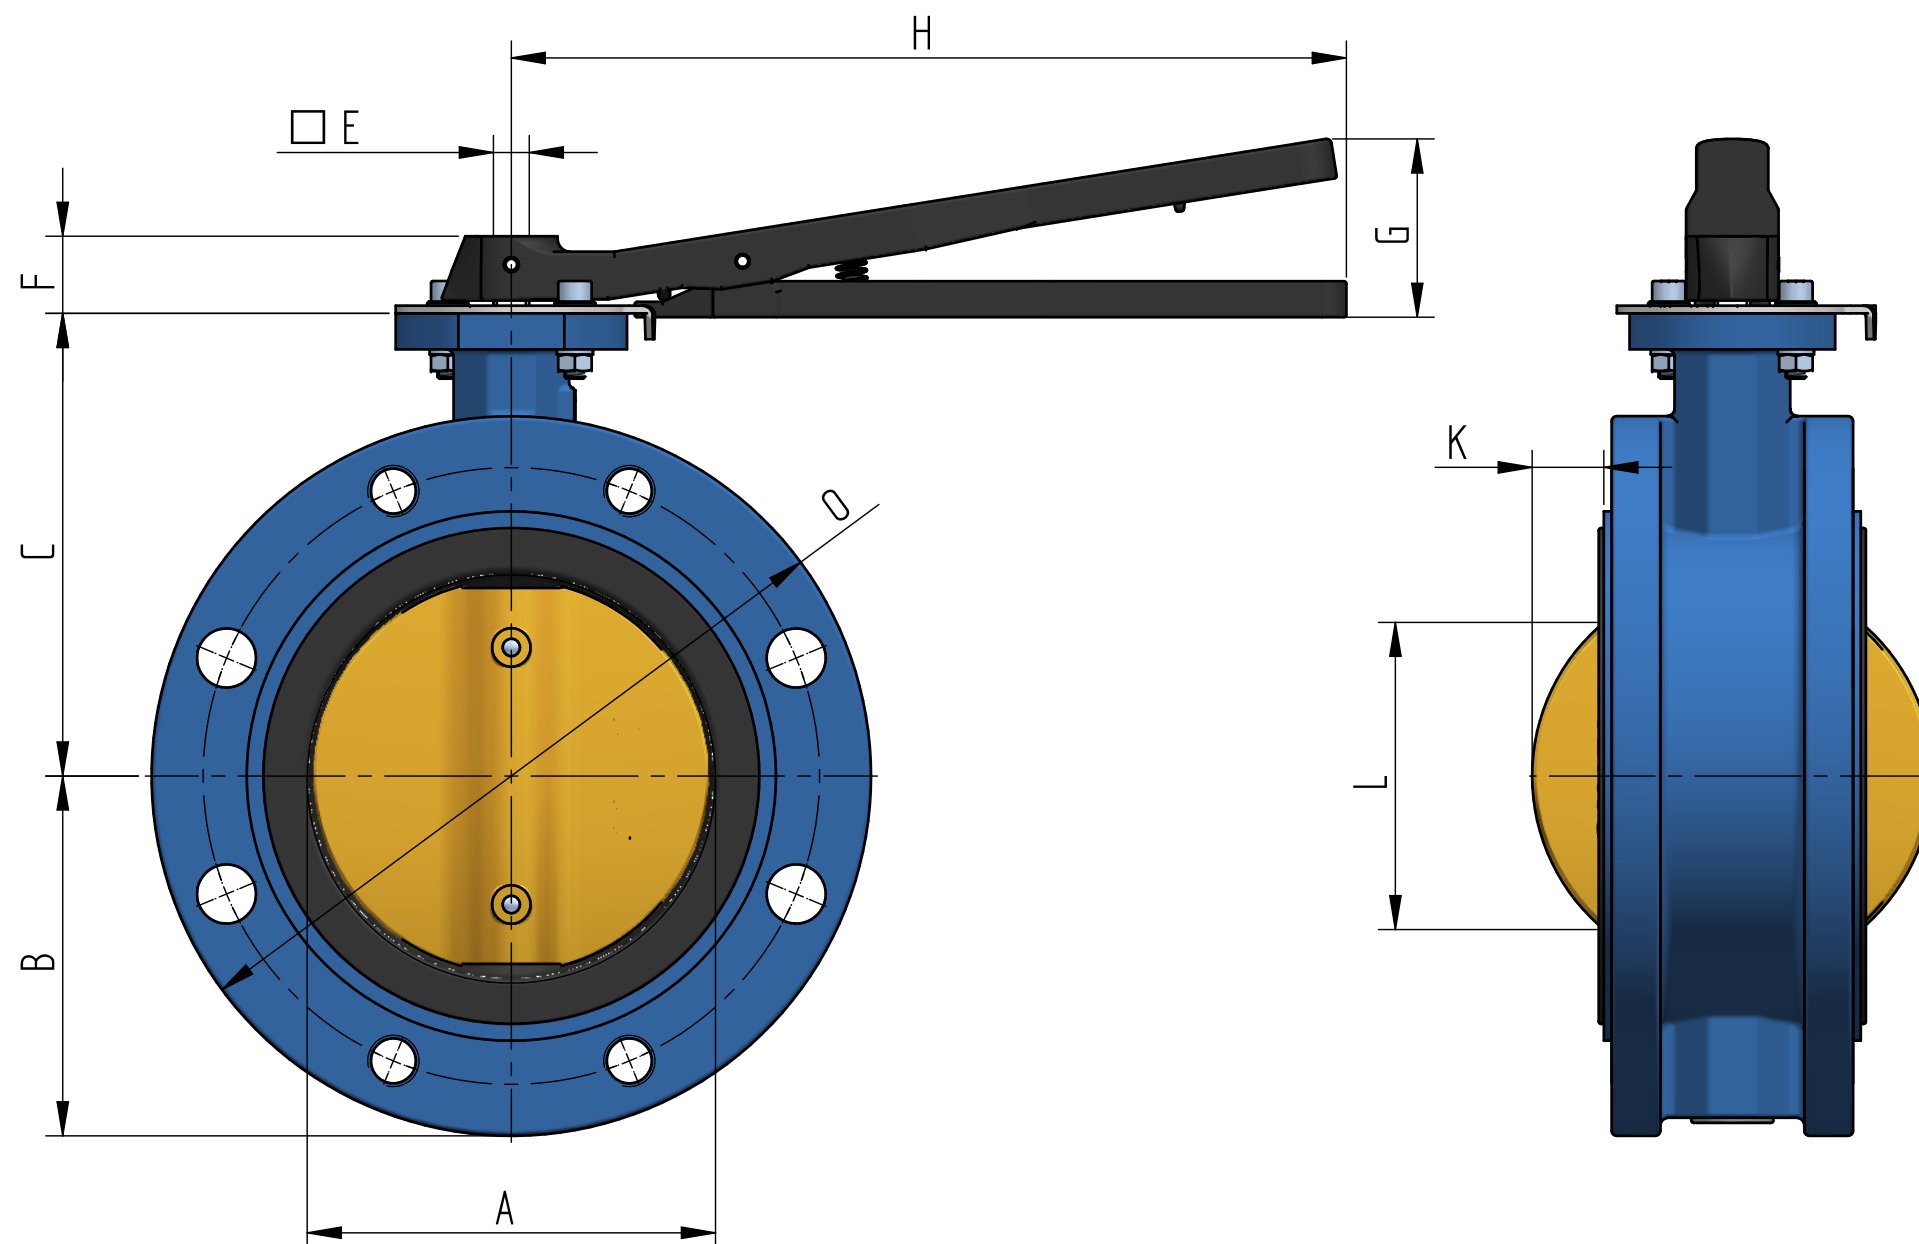

Size DN 50 to DN 200, Design EN593
Face to face acc. JIS F-7480
Flange connections: JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 16 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +250°C

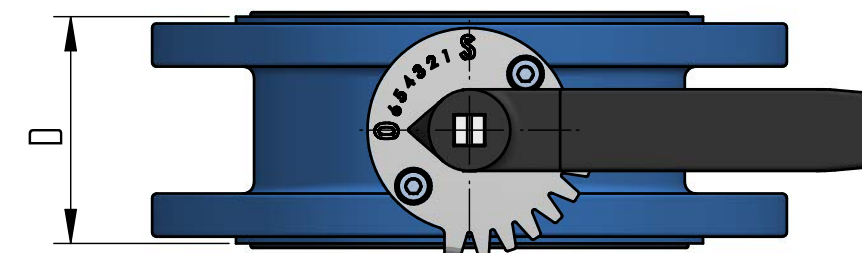

Size	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 50	52	77.5	118	45	[] 11	26	56	223	4	28	155	4.8
DN 65	63	87.5	126	45	[] 11	26	56	223	10	46	175	6.0
DN 80	78	92.5	133	60	[] 11	26	56	223	10	51	185	7.3
DN 100	103	105.0	147	60	[] 11	26	56	223	22	85	210	8.8
DN 125	125	125.0	160	100	[] 14	28	68	325	12	73	250	15.3
DN 150	155	140.0	180	100	[] 14	28	68	325	28	120	280	19.1
DN 200	201	165.0	204	100	[] 17	30	68	325	51	176	330	24.0